


Luma-Net®

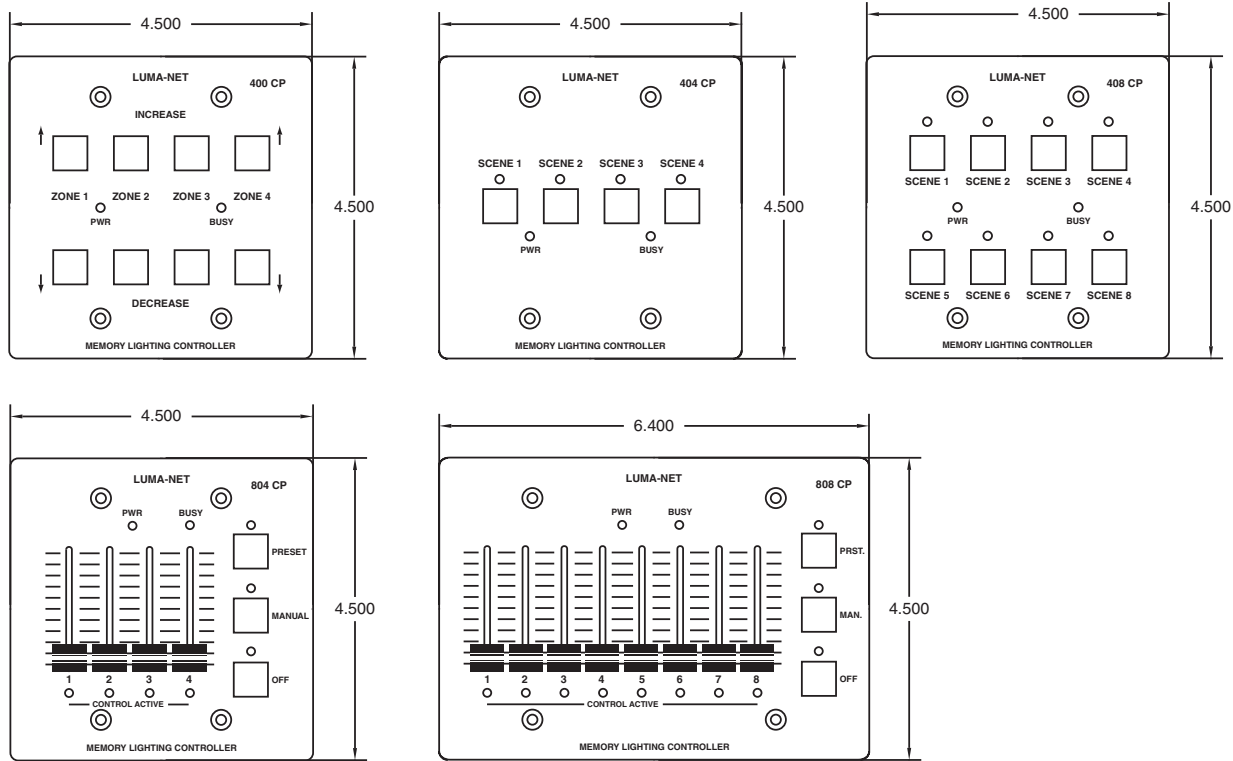

The Luma-Net® architectural control stations are some of the most reliable, easy-to-use controls available. They are ideal wherever cost, durability, and ease of use are major considerations.

Luma-Net architectural control stations provide total lighting integration, combining house and stage lighting into one cohesive system. Five different models provide zone and scene control, as well as individual channel faders. Their rugged design withstands even heavy commercial use.

APPLICATIONS

- Churches
- Schools
- Conference Centers
- Restaurants
- Board Rooms
- Universities

DIMENSIONAL DATA - IN. [CM] LBS. [KG]

	400CP	404CP	408CP	804CP	808CP
Height	4.5 [11.4]	4.5 [11.4]	4.5 [11.4]	4.5 [11.4]	4.5 [11.4]
Width	4.5 [11.4]	4.5 [11.4]	4.5 [11.4]	4.5 [11.4]	6.4 [16.3]
Depth	2.75 [7]	2.75 [7]	2.75 [7]	2.75 [7]	2.75 [7]
Shipping Weight	1 [.45]	1 [.45]	1 [.45]	2 [.9]	2 [.9]
Back box size	2 gang	2 gang	2 gang	2 gang	3 gang

Luma-Net

FEATURES

400 SERIES

- Programmable fade times
- Programmable master/slave operation
- Control lockout function with external key switch or other contact closure
- Front panel programmable or from PC with optional Luma-Net® software and interface
- Mounts in deep 2-gang electrical box

800 SERIES

- Programmable preset buttons
- Programmable fade time
- Programmable “on” and “off” scenes
- All off button
- Control lockout function with external key switch or other contact closure
- Slides and fade time programmable with Luma-Net software and interface only
- 804 mounts in deep 2 gang electrical box
- 808 mounts in deep 3 gang electrical box

400 CP

- Raise - lower control over 4 zones by holding a button
- Controls up to 512 dimmer channels

404 CP

- 4 scene control with one button press
- Controls up to 100 dimmer channels

408 CP

- 8 scene control with one button press
- Controls up to 100 dimmer channels

804 CP

- 4 channel slider station with “on” and “off” programmable scenes
- Controls up to 100 dimmer channels

808 CP

- 8 channel slider station with “on” and “off” programmable scenes
- Controls up to 100 dimmer channels

WIRE

- Minimum 22 awg, 4 conductor, shielded twisted pair (similar to Belden 8302 or 8723)

CAT. NO.	DESCRIPTION
No400-CP0	Remote Memory Control Panel with 4 Selectable Control Zones. Mounts in Standard 2-Gang Box. Easy Connections with 4 Wire Digital Interface. Controls 512 Dimmer Channels.
No404-CP0	Remote Memory Control Panel with 4 Programmable Scenes. Mounts in Standard 2-Gang Box. Easy Connections with 4 Wire Digital Interface. Controls 100 Dimmer Channels.
No408-CP0	Remote Memory Control Panel with 8 Programmable Scenes. Mounts in Standard 2-Gang Box. Easy Connections with 4 Wire Digital Interface. Controls 100 Dimmer Channels.
No804-CP0	Remote Memory Control Panel with 4 Manual Slide Controls. Mounts in Standard 2-Gang Box. Easy Connections with 4 Wire Digital Interface. Controls 100 Dimmer Channels. (OPT 203 required for programming.)
No808-CP0	Remote Memory Control Panel with 8 Manual Slide Controls. Mounts in Standard 3-Gang Box. Easy Connections with 4 Wire Digital Interface. Controls 100 Dimmer Channels. (OPT 203 required for programming.)

LEVITON SPECIFICATION SUBMITTAL	
JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc. Lighting Management Systems

20497 SW Teton Avenue, Portland, OR 97062
 Telephone: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Monday-Friday): 1-800-959-6004

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/lms

© 2008 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-7938/B8-ak