


NEW YORK • LONDON

475 Barell Ave., Carlstadt, NJ 07072 Voice: 800-230-9497, 201-549-1160 Fax: 201-549-1161

QolorFLEX 5050-12-RGB-60-5-67-1 is an exterior grade RGB LED Tape with a high output brightness and the ability to create a wide spectrum of colors when used with a DMX color control system. It is ideal for use in film, video and theatrical applications and is available in full 5 meter spools, sample strips and is included in our QolorFLEX Demo Kit. End caps are required after



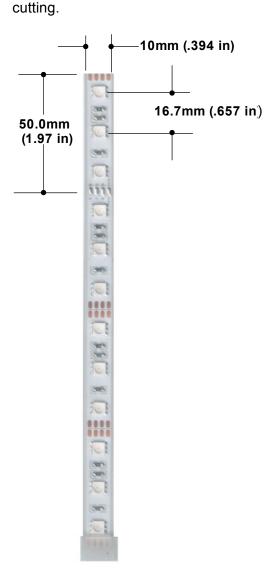

QolorFLEX LED Tape P/N 5050-12-RGB-60-5-67-1

SPECIFICATIONS

SPECII ICATIONS	
Color(s)	RGB
Color Temp	N/A
Wavelength	622/518/468
Beam Angle	120°
Brightness (lumens/m)	350
Power Consumption (watts/5m)	50.4
Power Consumption (watts/ft)	3.07
Operating Voltage	12VDC
Current (mA/5m)	4200
Quantity of LEDs Per 5m (16.4 ft)	300
CRI	N/A
LED Spacing	16.7
Cutting Increment	50.0mm
Length	5m (16.4 ft)
Width	10mm
Average Life	25,000 hrs
Compliance	ETL
Warranty	Two Years
IP Rating	IP67
LED Chip Size	5050
Backing Color	White
Use Environment	Outdoor