


475 Barell Ave., Carlstadt, NJ 07072 Voice: 800-230-9497, 201-549-1160 Fax: 201-549-1161

QolorFLEX 5050-12-RGBA-60-5-67-1 is an exterior grade hybrid LED Tape with a medium output brightness and the ability to create a full spectrum of colors when used with a DMX control system. It is encased in a translucent silicone sleeve which requires the use of end caps after cutting. It is available in full 5 meter spools, sample strips and is included in our QolorFLEX Demo Kit.

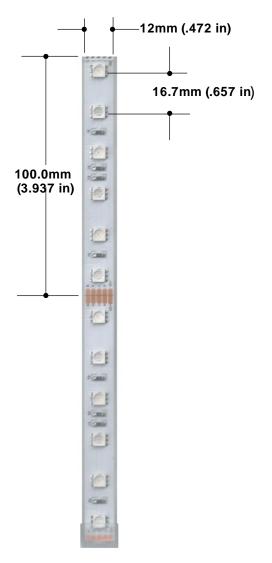

QolorFLEX LED Tape

P/N 5050-12-RGBA-60-5-67-1

SPECIFICATIONS

Color(s)	RGB+Amber
Color Temp	N/A
Wavelength	622/518/468/588
Beam Angle	120°
Brightness (lumens/m)	400
Power Consumption (watts/5m)	50.4
Power Consumption (watts/ft)	3.07
Operating Voltage	12VDC
Current (mA/5m)	4200
Quantity of LEDs Per 5m (16.4 ft)	300
CRI	N/A
CRI LED Spacing	N/A 16.7
LED Spacing	16.7
LED Spacing Cutting Increment	16.7 100.0mm
LED Spacing Cutting Increment Length	16.7 100.0mm 5m (16.4 ft)
LED Spacing Cutting Increment Length Width	16.7 100.0mm 5m (16.4 ft) 12mm
LED Spacing Cutting Increment Length Width Average Life	16.7 100.0mm 5m (16.4 ft) 12mm 25,000 hrs
LED Spacing Cutting Increment Length Width Average Life Compliance	16.7 100.0mm 5m (16.4 ft) 12mm 25,000 hrs ETL
LED Spacing Cutting Increment Length Width Average Life Compliance Warranty	16.7 100.0mm 5m (16.4 ft) 12mm 25,000 hrs ETL Two Years
LED Spacing Cutting Increment Length Width Average Life Compliance Warranty IP Rating	16.7 100.0mm 5m (16.4 ft) 12mm 25,000 hrs ETL Two Years IP67

