


475 Barell Ave., Carlstadt, NJ 07072 Voice: 800-230-9497, 201-549-1160 Fax: 201-549-1161

QolorFLEX 5050-24-Q-RGBI-60-5-20-1 is an interior grade Quad Chip 24V RGBI LED Tape with a high output brightness and the ability to create a wide spectrum of colors when used with a DMX color control system. It is ideal for use in film, video and theatrical applications and is available in full 5 meter reels and sample strips.

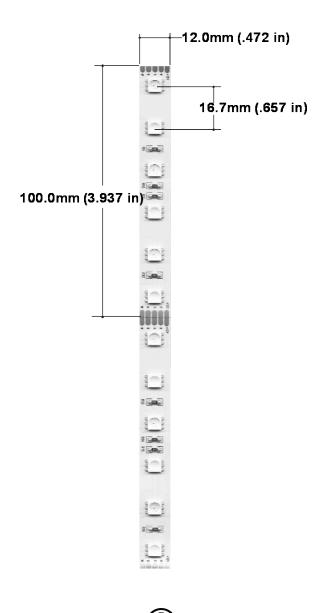

Intertek

QolorFLEX LED Tape P/N 5050-24-Q-RGBI-60-5-20-1

SPECIFICATIONS

Color(s)	RGBI
Color Temp	N/A
Wavelength	622/518/468/450
Beam Angle	120°
Brightness (lumens/m)	N/A
Power Consumption (watts/5m)	60
Power Consumption (watts/ft)	3.66
Operating Voltage	24VDC
Current (mA/5m)	2500
Quantity of LEDs Per 5m (16.4 ft)	300
CRI	N/A
CRI LED Spacing	N/A 16.7mm (.657 in)
LED Spacing	16.7mm (.657 in)
LED Spacing Cutting Increment	16.7mm (.657 in) 100.0mm (3.937 in)
LED Spacing Cutting Increment Length	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft)
LED Spacing Cutting Increment Length Width	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft) 12mm (.472 in)
LED Spacing Cutting Increment Length Width Average Life	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft) 12mm (.472 in) 25,000 hrs
LED Spacing Cutting Increment Length Width Average Life Compliance	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft) 12mm (.472 in) 25,000 hrs ETL
LED Spacing Cutting Increment Length Width Average Life Compliance Warranty	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft) 12mm (.472 in) 25,000 hrs ETL Two Years
LED Spacing Cutting Increment Length Width Average Life Compliance Warranty IP Rating	16.7mm (.657 in) 100.0mm (3.937 in) 5m (16.4 ft) 12mm (.472 in) 25,000 hrs ETL Two Years IP20