

## DMX CHART



Maverick Storm 3 BeamWash- V1.230424

### DMX Values

#### Single Control Values

Advanced2 (323 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
8	Color macro (inner plate)		
9	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
10	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
11	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
12	LED macro delay	000 ⇔ 255	Fast to slow
13	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
14	Background color (inner plate)		
15	Background dimmer (ring)	000 ⇔ 255	0–100%
16	Background dimmer fine (ring)	000 ⇔ 255	0–100%
17	Background dimmer (inner plate)	000 ⇔ 255	0–100%
18	Background dimmer fine (inner plate)	000 ⇔ 255	0–100%
19	Dimmer (ring)	000 ⇔ 255	0–100%
20	Dimmer fine (ring)	000 ⇔ 255	0–100%
21	Dimmer (inner plate)	000 ⇔ 255	0–100%
22	Dimmer fine (inner plate)	000 ⇔ 255	0–100%
23	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
24	Shutter (inner plate)	000 ⇔ 255	
25	Ring zoom	000 ⇔ 255	Wide to narrow
26	Main zoom	000 ⇔ 255	Wide to narrow
27	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
28	Red (ring)	000 ⇔ 255	0–100%
29	Red (inner plate)	000 ⇔ 255	0–100%
30	Red fine (ring)	000 ⇔ 255	0–100%
31	Red fine (inner plate)	000 ⇔ 255	0–100%
32	Green (ring)	000 ⇔ 255	0–100%
33	Green (inner plate)	000 ⇔ 255	0–100%
34	Green fine (ring)	000 ⇔ 255	0–100%
35	Green fine (inner plate)	000 ⇔ 255	0–100%
36	Blue (ring)	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
37	Blue (inner plate)	000 ⇔ 255	0–100%
38	Blue fine (ring)	000 ⇔ 255	0–100%
39	Blue fine (inner plate)	000 ⇔ 255	0–100%
40	White (ring)	000 ⇔ 255	0–100%
41	White (inner plate)	000 ⇔ 255	0–100%
42	White fine (ring)	000 ⇔ 255	0–100%
43	White fine (inner plate)	000 ⇔ 255	0–100%
44	Dimmer 1	000 ⇔ 255	0–100%
45	Dimmer fine 1	000 ⇔ 255	0–100%
46	Red 1	000 ⇔ 255	0–100%
47	Red fine 1	000 ⇔ 255	0–100%
48	Green 1	000 ⇔ 255	0–100%
49	Green fine 1	000 ⇔ 255	0–100%
50	Blue 1	000 ⇔ 255	0–100%
51	Blue fine 1	000 ⇔ 255	0–100%
52	White 1	000 ⇔ 255	0–100%
53	White fine 1	000 ⇔ 255	0–100%
54	Dimmer 2	000 ⇔ 255	0–100%
55	Dimmer fine 2	000 ⇔ 255	0–100%
56	Red 2	000 ⇔ 255	0–100%
57	Red fine 2	000 ⇔ 255	0–100%
58	Green 2	000 ⇔ 255	0–100%
59	Green fine 2	000 ⇔ 255	0–100%
60	Blue 2	000 ⇔ 255	0–100%
61	Blue fine 2	000 ⇔ 255	0–100%
62	White 2	000 ⇔ 255	0–100%
63	White fine 2	000 ⇔ 255	0–100%
64	Dimmer 3	000 ⇔ 255	0–100%
65	Dimmer fine 3	000 ⇔ 255	0–100%
66	Red 3	000 ⇔ 255	0–100%
67	Red fine 3	000 ⇔ 255	0–100%
68	Green 3	000 ⇔ 255	0–100%
69	Green fine 3	000 ⇔ 255	0–100%
70	Blue 3	000 ⇔ 255	0–100%
71	Blue fine 3	000 ⇔ 255	0–100%
72	White 3	000 ⇔ 255	0–100%
73	White fine 3	000 ⇔ 255	0–100%
74	Dimmer 4	000 ⇔ 255	0–100%
75	Dimmer fine 4	000 ⇔ 255	0–100%
76	Red 4	000 ⇔ 255	0–100%
77	Red fine 4	000 ⇔ 255	0–100%
78	Green 4	000 ⇔ 255	0–100%
79	Green fine 4	000 ⇔ 255	0–100%
80	Blue 4	000 ⇔ 255	0–100%
81	Blue fine 4	000 ⇔ 255	0–100%
82	White 4	000 ⇔ 255	0–100%
83	White fine 4	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
84	Dimmer 5	000 ⇔ 255	0-100%
85	Dimmer fine 5	000 ⇔ 255	0-100%
86	Red 5	000 ⇔ 255	0-100%
87	Red fine 5	000 ⇔ 255	0-100%
88	Green 5	000 ⇔ 255	0-100%
89	Green fine 5	000 ⇔ 255	0-100%
90	Blue 5	000 ⇔ 255	0-100%
91	Blue fine 5	000 ⇔ 255	0-100%
92	White 5	000 ⇔ 255	0-100%
93	White fine 5	000 ⇔ 255	0-100%
94	Dimmer 6	000 ⇔ 255	0-100%
95	Dimmer fine 6	000 ⇔ 255	0-100%
96	Red 6	000 ⇔ 255	0-100%
97	Red fine 6	000 ⇔ 255	0-100%
98	Green 6	000 ⇔ 255	0-100%
99	Green fine 6	000 ⇔ 255	0-100%
100	Blue 6	000 ⇔ 255	0-100%
101	Blue fine 6	000 ⇔ 255	0-100%
102	White 6	000 ⇔ 255	0-100%
103	White fine 6	000 ⇔ 255	0-100%
104	Dimmer 7	000 ⇔ 255	0-100%
105	Dimmer fine 7	000 ⇔ 255	0-100%
106	Red 7	000 ⇔ 255	0-100%
107	Red fine 7	000 ⇔ 255	0-100%
108	Green 7	000 ⇔ 255	0-100%
109	Green fine 7	000 ⇔ 255	0-100%
110	Blue 7	000 ⇔ 255	0-100%
111	Blue fine 7	000 ⇔ 255	0-100%
112	White 7	000 ⇔ 255	0-100%
113	White fine 7	000 ⇔ 255	0-100%
114	Dimmer 8	000 ⇔ 255	0-100%
115	Dimmer fine 8	000 ⇔ 255	0-100%
116	Red 8	000 ⇔ 255	0-100%
117	Red fine 8	000 ⇔ 255	0-100%
118	Green 8	000 ⇔ 255	0-100%
119	Green fine 8	000 ⇔ 255	0-100%
120	Blue 8	000 ⇔ 255	0-100%
121	Blue fine 8	000 ⇔ 255	0-100%
122	White 8	000 ⇔ 255	0-100%
123	White fine 8	000 ⇔ 255	0-100%
124	Dimmer 9	000 ⇔ 255	0-100%
125	Dimmer fine 9	000 ⇔ 255	0-100%
126	Red 9	000 ⇔ 255	0-100%
127	Red fine 9	000 ⇔ 255	0-100%
128	Green 9	000 ⇔ 255	0-100%
129	Green fine 9	000 ⇔ 255	0-100%
130	Blue 9	000 ⇔ 255	0-100%

Channel	Function	Value	Percent/Setting
131	Blue fine 9	000 ⇄ 255	0–100%
132	White 9	000 ⇄ 255	0–100%
133	White fine 9	000 ⇄ 255	0–100%
134	Dimmer 10	000 ⇄ 255	0–100%
135	Dimmer fine 10	000 ⇄ 255	0–100%
136	Red 10	000 ⇄ 255	0–100%
137	Red fine 10	000 ⇄ 255	0–100%
138	Green 10	000 ⇄ 255	0–100%
139	Green fine 10	000 ⇄ 255	0–100%
140	Blue 10	000 ⇄ 255	0–100%
141	Blue fine 10	000 ⇄ 255	0–100%
142	White 10	000 ⇄ 255	0–100%
143	White fine 10	000 ⇄ 255	0–100%
144	Dimmer 11	000 ⇄ 255	0–100%
145	Dimmer fine 11	000 ⇄ 255	0–100%
146	Red 11	000 ⇄ 255	0–100%
147	Red fine 11	000 ⇄ 255	0–100%
148	Green 11	000 ⇄ 255	0–100%
149	Green fine 11	000 ⇄ 255	0–100%
150	Blue 11	000 ⇄ 255	0–100%
151	Blue fine 11	000 ⇄ 255	0–100%
152	White 11	000 ⇄ 255	0–100%
153	White fine 11	000 ⇄ 255	0–100%
154	Dimmer 12	000 ⇄ 255	0–100%
155	Dimmer fine 12	000 ⇄ 255	0–100%
156	Red 12	000 ⇄ 255	0–100%
157	Red fine 12	000 ⇄ 255	0–100%
158	Green 12	000 ⇄ 255	0–100%
159	Green fine 12	000 ⇄ 255	0–100%
160	Blue 12	000 ⇄ 255	0–100%
161	Blue fine 12	000 ⇄ 255	0–100%
162	White 12	000 ⇄ 255	0–100%
163	White fine 12	000 ⇄ 255	0–100%
164	Dimmer 13	000 ⇄ 255	0–100%
165	Dimmer fine 13	000 ⇄ 255	0–100%
166	Red 13	000 ⇄ 255	0–100%
167	Red fine 13	000 ⇄ 255	0–100%
168	Green 13	000 ⇄ 255	0–100%
169	Green fine 13	000 ⇄ 255	0–100%
170	Blue 13	000 ⇄ 255	0–100%
171	Blue fine 13	000 ⇄ 255	0–100%
172	White 13	000 ⇄ 255	0–100%
173	White fine 13	000 ⇄ 255	0–100%
174	Dimmer 14	000 ⇄ 255	0–100%
175	Dimmer fine 14	000 ⇄ 255	0–100%
176	Red 14	000 ⇄ 255	0–100%
177	Red fine 14	000 ⇄ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
178	Green 14	000 ⇔ 255	0–100%
179	Green fine 14	000 ⇔ 255	0–100%
180	Blue 14	000 ⇔ 255	0–100%
181	Blue fine 14	000 ⇔ 255	0–100%
182	White 14	000 ⇔ 255	0–100%
183	White fine 14	000 ⇔ 255	0–100%
184	Dimmer 15	000 ⇔ 255	0–100%
185	Dimmer fine 15	000 ⇔ 255	0–100%
186	Red 15	000 ⇔ 255	0–100%
187	Red fine 15	000 ⇔ 255	0–100%
188	Green 15	000 ⇔ 255	0–100%
189	Green fine 15	000 ⇔ 255	0–100%
190	Blue 15	000 ⇔ 255	0–100%
191	Blue fine 15	000 ⇔ 255	0–100%
192	White 15	000 ⇔ 255	0–100%
193	White fine 15	000 ⇔ 255	0–100%
194	Dimmer 16	000 ⇔ 255	0–100%
195	Dimmer fine 16	000 ⇔ 255	0–100%
196	Red 16	000 ⇔ 255	0–100%
197	Red fine 16	000 ⇔ 255	0–100%
198	Green 16	000 ⇔ 255	0–100%
199	Green fine 16	000 ⇔ 255	0–100%
200	Blue 16	000 ⇔ 255	0–100%
201	Blue fine 16	000 ⇔ 255	0–100%
202	White 16	000 ⇔ 255	0–100%
203	White fine 16	000 ⇔ 255	0–100%
204	Dimmer 17	000 ⇔ 255	0–100%
205	Dimmer fine 17	000 ⇔ 255	0–100%
206	Red 17	000 ⇔ 255	0–100%
207	Red fine 17	000 ⇔ 255	0–100%
208	Green 17	000 ⇔ 255	0–100%
209	Green fine 17	000 ⇔ 255	0–100%
210	Blue 17	000 ⇔ 255	0–100%
211	Blue fine 17	000 ⇔ 255	0–100%
212	White 17	000 ⇔ 255	0–100%
213	White fine 17	000 ⇔ 255	0–100%
214	Dimmer 18	000 ⇔ 255	0–100%
215	Dimmer fine 18	000 ⇔ 255	0–100%
216	Red 18	000 ⇔ 255	0–100%
217	Red fine 18	000 ⇔ 255	0–100%
218	Green 18	000 ⇔ 255	0–100%
219	Green fine 18	000 ⇔ 255	0–100%
220	Blue 18	000 ⇔ 255	0–100%
221	Blue fine 18	000 ⇔ 255	0–100%
222	White 18	000 ⇔ 255	0–100%
223	White fine 18	000 ⇔ 255	0–100%
224	Dimmer 19	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
225	Dimmer fine 19	000 ⇄ 255	0–100%
226	Red 19	000 ⇄ 255	0–100%
227	Red fine 19	000 ⇄ 255	0–100%
228	Green 19	000 ⇄ 255	0–100%
229	Green fine 19	000 ⇄ 255	0–100%
230	Blue 19	000 ⇄ 255	0–100%
231	Blue fine 19	000 ⇄ 255	0–100%
232	White 19	000 ⇄ 255	0–100%
233	White fine 19	000 ⇄ 255	0–100%
234	Dimmer 20	000 ⇄ 255	0–100%
235	Dimmer fine 20	000 ⇄ 255	0–100%
236	Red 20	000 ⇄ 255	0–100%
237	Red fine 20	000 ⇄ 255	0–100%
238	Green 20	000 ⇄ 255	0–100%
239	Green fine 20	000 ⇄ 255	0–100%
240	Blue 20	000 ⇄ 255	0–100%
241	Blue fine 20	000 ⇄ 255	0–100%
242	White 20	000 ⇄ 255	0–100%
243	White fine 20	000 ⇄ 255	0–100%
244	Dimmer 21	000 ⇄ 255	0–100%
245	Dimmer fine 21	000 ⇄ 255	0–100%
246	Red 21	000 ⇄ 255	0–100%
247	Red fine 21	000 ⇄ 255	0–100%
248	Green 21	000 ⇄ 255	0–100%
249	Green fine 21	000 ⇄ 255	0–100%
250	Blue 21	000 ⇄ 255	0–100%
251	Blue fine 21	000 ⇄ 255	0–100%
252	White 21	000 ⇄ 255	0–100%
253	White fine 21	000 ⇄ 255	0–100%
254	Dimmer 22	000 ⇄ 255	0–100%
255	Dimmer fine 22	000 ⇄ 255	0–100%
256	Red 22	000 ⇄ 255	0–100%
257	Red fine 22	000 ⇄ 255	0–100%
258	Green 22	000 ⇄ 255	0–100%
259	Green fine 22	000 ⇄ 255	0–100%
260	Blue 22	000 ⇄ 255	0–100%
261	Blue fine 22	000 ⇄ 255	0–100%
262	White 22	000 ⇄ 255	0–100%
263	White fine 22	000 ⇄ 255	0–100%
264	Dimmer 23	000 ⇄ 255	0–100%
265	Dimmer fine 23	000 ⇄ 255	0–100%
266	Red 23	000 ⇄ 255	0–100%
267	Red fine 23	000 ⇄ 255	0–100%
268	Green 23	000 ⇄ 255	0–100%
269	Green fine 23	000 ⇄ 255	0–100%
270	Blue 23	000 ⇄ 255	0–100%
271	Blue fine 23	000 ⇄ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
272	White 23	000 ⇔ 255	0–100%
273	White fine 23	000 ⇔ 255	0–100%
274	Dimmer 24	000 ⇔ 255	0–100%
275	Dimmer fine 24	000 ⇔ 255	0–100%
276	Red 24	000 ⇔ 255	0–100%
277	Red fine 24	000 ⇔ 255	0–100%
278	Green 24	000 ⇔ 255	0–100%
279	Green fine 24	000 ⇔ 255	0–100%
280	Blue 24	000 ⇔ 255	0–100%
281	Blue fine 24	000 ⇔ 255	0–100%
282	White 24	000 ⇔ 255	0–100%
283	White fine 24	000 ⇔ 255	0–100%
284	Dimmer 25	000 ⇔ 255	0–100%
285	Dimmer fine 25	000 ⇔ 255	0–100%
286	Red 25	000 ⇔ 255	0–100%
287	Red fine 25	000 ⇔ 255	0–100%
288	Green 25	000 ⇔ 255	0–100%
289	Green fine 25	000 ⇔ 255	0–100%
290	Blue 25	000 ⇔ 255	0–100%
291	Blue fine 25	000 ⇔ 255	0–100%
292	White 25	000 ⇔ 255	0–100%
293	White fine 25	000 ⇔ 255	0–100%
294	Dimmer 26	000 ⇔ 255	0–100%
295	Dimmer fine 26	000 ⇔ 255	0–100%
296	Red 26	000 ⇔ 255	0–100%
297	Red fine 26	000 ⇔ 255	0–100%
298	Green 26	000 ⇔ 255	0–100%
299	Green fine 26	000 ⇔ 255	0–100%
300	Blue 26	000 ⇔ 255	0–100%
301	Blue fine 26	000 ⇔ 255	0–100%
302	White 26	000 ⇔ 255	0–100%
303	White fine 26	000 ⇔ 255	0–100%
304	Dimmer 27	000 ⇔ 255	0–100%
305	Dimmer fine 27	000 ⇔ 255	0–100%
306	Red 27	000 ⇔ 255	0–100%
307	Red fine 27	000 ⇔ 255	0–100%
308	Green 27	000 ⇔ 255	0–100%
309	Green fine 27	000 ⇔ 255	0–100%
310	Blue 27	000 ⇔ 255	0–100%
311	Blue fine 27	000 ⇔ 255	0–100%
312	White 27	000 ⇔ 255	0–100%
313	White fine 27	000 ⇔ 255	0–100%
314	Dimmer 28	000 ⇔ 255	0–100%
315	Dimmer fine 28	000 ⇔ 255	0–100%
316	Red 28	000 ⇔ 255	0–100%
317	Red fine 28	000 ⇔ 255	0–100%
318	Green 28	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
319	Green fine 28	000 ⇔ 255	0–100%
320	Blue 28	000 ⇔ 255	0–100%
321	Blue fine 28	000 ⇔ 255	0–100%
322	White 28	000 ⇔ 255	0–100%
323	White fine 28	000 ⇔ 255	0–100%

### Tour (308 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Color macro (inner plate)		
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color (ring)	000⇔ 255	See <a href="#">Color Chart</a>
	Background color (inner plate)		
13	Background dimmer (ring)	000 ⇔ 255	0–100%
	Background dimmer (inner plate)		
14	Background dimmer fine (ring)	000 ⇔ 255	0–100%
	Background dimmer fine (inner plate)		
15	Dimmer (ring)	000 ⇔ 255	0–100%
	Dimmer (inner plate)		
16	Dimmer fine (ring)	000 ⇔ 255	0–100%
	Dimmer fine (inner plate)		
17	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
	Shutter (inner plate)		
18	Ring zoom	000 ⇔ 255	Wide to narrow
19	Main zoom	000 ⇔ 255	Wide to narrow
20	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
21	Red (ring)	000 ⇔ 255	0–100%
	Red (inner plate)		
22	Red fine (ring)	000 ⇔ 255	0–100%
	Red fine (inner plate)		



# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
23	Green (ring)	000 ⇔ 255	0–100%
	Green (inner plate)		
24	Green fine (ring)	000 ⇔ 255	0–100%
	Green fine (inner plate)		
25	Blue (ring)	000 ⇔ 255	0–100%
	Blue (inner plate)		
26	Blue fine (ring)	000 ⇔ 255	0–100%
	Blue fine (inner plate)		
27	White (ring)	000 ⇔ 255	0–100%
	White (inner plate)		
28	White fine (ring)	000 ⇔ 255	0–100%
	White fine (inner plate)		
29	Dimmer 1	000 ⇔ 255	0–100%
30	Dimmer fine 1	000 ⇔ 255	0–100%
31	Red 1	000 ⇔ 255	0–100%
32	Red fine 1	000 ⇔ 255	0–100%
33	Green 1	000 ⇔ 255	0–100%
34	Green fine 1	000 ⇔ 255	0–100%
35	Blue 1	000 ⇔ 255	0–100%
36	Blue fine 1	000 ⇔ 255	0–100%
37	White 1	000 ⇔ 255	0–100%
38	White fine 1	000 ⇔ 255	0–100%
39	Dimmer 2	000 ⇔ 255	0–100%
40	Dimmer fine 2	000 ⇔ 255	0–100%
41	Red 2	000 ⇔ 255	0–100%
42	Red fine 2	000 ⇔ 255	0–100%
43	Green 2	000 ⇔ 255	0–100%
44	Green fine 2	000 ⇔ 255	0–100%
45	Blue 2	000 ⇔ 255	0–100%
46	Blue fine 2	000 ⇔ 255	0–100%
47	White 2	000 ⇔ 255	0–100%
48	White fine 2	000 ⇔ 255	0–100%
49	Dimmer 3	000 ⇔ 255	0–100%
50	Dimmer fine 3	000 ⇔ 255	0–100%
51	Red 3	000 ⇔ 255	0–100%
52	Red fine 3	000 ⇔ 255	0–100%
53	Green 3	000 ⇔ 255	0–100%
54	Green fine 3	000 ⇔ 255	0–100%
55	Blue 3	000 ⇔ 255	0–100%
56	Blue fine 3	000 ⇔ 255	0–100%
57	White 3	000 ⇔ 255	0–100%
58	White fine 3	000 ⇔ 255	0–100%
59	Dimmer 4	000 ⇔ 255	0–100%
60	Dimmer fine 4	000 ⇔ 255	0–100%
61	Red 4	000 ⇔ 255	0–100%
62	Red fine 4	000 ⇔ 255	0–100%
63	Green 4	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
64	Green fine 4	000 ⇔ 255	0–100%
65	Blue 4	000 ⇔ 255	0–100%
66	Blue fine 4	000 ⇔ 255	0–100%
67	White 4	000 ⇔ 255	0–100%
68	White fine 4	000 ⇔ 255	0–100%
69	Dimmer 5	000 ⇔ 255	0–100%
70	Dimmer fine 5	000 ⇔ 255	0–100%
71	Red 5	000 ⇔ 255	0–100%
72	Red fine 5	000 ⇔ 255	0–100%
73	Green 5	000 ⇔ 255	0–100%
74	Green fine 5	000 ⇔ 255	0–100%
75	Blue 5	000 ⇔ 255	0–100%
76	Blue fine 5	000 ⇔ 255	0–100%
77	White 5	000 ⇔ 255	0–100%
78	White fine 5	000 ⇔ 255	0–100%
79	Dimmer 6	000 ⇔ 255	0–100%
80	Dimmer fine 6	000 ⇔ 255	0–100%
81	Red 6	000 ⇔ 255	0–100%
82	Red fine 6	000 ⇔ 255	0–100%
83	Green 6	000 ⇔ 255	0–100%
84	Green fine 6	000 ⇔ 255	0–100%
85	Blue 6	000 ⇔ 255	0–100%
86	Blue fine 6	000 ⇔ 255	0–100%
87	White 6	000 ⇔ 255	0–100%
88	White fine 6	000 ⇔ 255	0–100%
89	Dimmer 7	000 ⇔ 255	0–100%
90	Dimmer fine 7	000 ⇔ 255	0–100%
91	Red 7	000 ⇔ 255	0–100%
92	Red fine 7	000 ⇔ 255	0–100%
93	Green 7	000 ⇔ 255	0–100%
94	Green fine 7	000 ⇔ 255	0–100%
95	Blue 7	000 ⇔ 255	0–100%
96	Blue fine 7	000 ⇔ 255	0–100%
97	White 7	000 ⇔ 255	0–100%
98	White fine 7	000 ⇔ 255	0–100%
99	Dimmer 8	000 ⇔ 255	0–100%
100	Dimmer fine 8	000 ⇔ 255	0–100%
101	Red 8	000 ⇔ 255	0–100%
102	Red fine 8	000 ⇔ 255	0–100%
103	Green 8	000 ⇔ 255	0–100%
104	Green fine 8	000 ⇔ 255	0–100%
105	Blue 8	000 ⇔ 255	0–100%
106	Blue fine 8	000 ⇔ 255	0–100%
107	White 8	000 ⇔ 255	0–100%
108	White fine 8	000 ⇔ 255	0–100%
109	Dimmer 9	000 ⇔ 255	0–100%
110	Dimmer fine 9	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
111	Red 9	000 ⇔ 255	0–100%
112	Red fine 9	000 ⇔ 255	0–100%
113	Green 9	000 ⇔ 255	0–100%
114	Green fine 9	000 ⇔ 255	0–100%
115	Blue 9	000 ⇔ 255	0–100%
116	Blue fine 9	000 ⇔ 255	0–100%
117	White 9	000 ⇔ 255	0–100%
118	White fine 9	000 ⇔ 255	0–100%
119	Dimmer 10	000 ⇔ 255	0–100%
120	Dimmer fine 10	000 ⇔ 255	0–100%
121	Red 10	000 ⇔ 255	0–100%
122	Red fine 10	000 ⇔ 255	0–100%
123	Green 10	000 ⇔ 255	0–100%
124	Green fine 10	000 ⇔ 255	0–100%
125	Blue 10	000 ⇔ 255	0–100%
126	Blue fine 10	000 ⇔ 255	0–100%
127	White 10	000 ⇔ 255	0–100%
128	White fine 10	000 ⇔ 255	0–100%
129	Dimmer 11	000 ⇔ 255	0–100%
130	Dimmer fine 11	000 ⇔ 255	0–100%
131	Red 11	000 ⇔ 255	0–100%
132	Red fine 11	000 ⇔ 255	0–100%
133	Green 11	000 ⇔ 255	0–100%
134	Green fine 11	000 ⇔ 255	0–100%
135	Blue 11	000 ⇔ 255	0–100%
136	Blue fine 11	000 ⇔ 255	0–100%
137	White 11	000 ⇔ 255	0–100%
138	White fine 11	000 ⇔ 255	0–100%
139	Dimmer 12	000 ⇔ 255	0–100%
140	Dimmer fine 12	000 ⇔ 255	0–100%
141	Red 12	000 ⇔ 255	0–100%
142	Red fine 12	000 ⇔ 255	0–100%
143	Green 12	000 ⇔ 255	0–100%
144	Green fine 12	000 ⇔ 255	0–100%
145	Blue 12	000 ⇔ 255	0–100%
146	Blue fine 12	000 ⇔ 255	0–100%
147	White 12	000 ⇔ 255	0–100%
148	White fine 12	000 ⇔ 255	0–100%
149	Dimmer 13	000 ⇔ 255	0–100%
150	Dimmer fine 13	000 ⇔ 255	0–100%
151	Red 13	000 ⇔ 255	0–100%
152	Red fine 13	000 ⇔ 255	0–100%
153	Green 13	000 ⇔ 255	0–100%
154	Green fine 13	000 ⇔ 255	0–100%
155	Blue 13	000 ⇔ 255	0–100%
156	Blue fine 13	000 ⇔ 255	0–100%
157	White 13	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
158	White fine 13	000 ⇄ 255	0–100%
159	Dimmer 14	000 ⇄ 255	0–100%
160	Dimmer fine 14	000 ⇄ 255	0–100%
161	Red 14	000 ⇄ 255	0–100%
162	Red fine 14	000 ⇄ 255	0–100%
163	Green 14	000 ⇄ 255	0–100%
164	Green fine 14	000 ⇄ 255	0–100%
165	Blue 14	000 ⇄ 255	0–100%
166	Blue fine 14	000 ⇄ 255	0–100%
167	White 14	000 ⇄ 255	0–100%
168	White fine 14	000 ⇄ 255	0–100%
169	Dimmer 15	000 ⇄ 255	0–100%
170	Dimmer fine 15	000 ⇄ 255	0–100%
171	Red 15	000 ⇄ 255	0–100%
172	Red fine 15	000 ⇄ 255	0–100%
173	Green 15	000 ⇄ 255	0–100%
174	Green fine 15	000 ⇄ 255	0–100%
175	Blue 15	000 ⇄ 255	0–100%
176	Blue fine 15	000 ⇄ 255	0–100%
177	White 15	000 ⇄ 255	0–100%
178	White fine 15	000 ⇄ 255	0–100%
179	Dimmer 16	000 ⇄ 255	0–100%
180	Dimmer fine 16	000 ⇄ 255	0–100%
181	Red 16	000 ⇄ 255	0–100%
182	Red fine 16	000 ⇄ 255	0–100%
183	Green 16	000 ⇄ 255	0–100%
184	Green fine 16	000 ⇄ 255	0–100%
185	Blue 16	000 ⇄ 255	0–100%
186	Blue fine 16	000 ⇄ 255	0–100%
187	White 16	000 ⇄ 255	0–100%
188	White fine 16	000 ⇄ 255	0–100%
189	Dimmer 17	000 ⇄ 255	0–100%
190	Dimmer fine 17	000 ⇄ 255	0–100%
191	Red 17	000 ⇄ 255	0–100%
192	Red fine 17	000 ⇄ 255	0–100%
193	Green 17	000 ⇄ 255	0–100%
194	Green fine 17	000 ⇄ 255	0–100%
195	Blue 17	000 ⇄ 255	0–100%
196	Blue fine 17	000 ⇄ 255	0–100%
197	White 17	000 ⇄ 255	0–100%
198	White fine 17	000 ⇄ 255	0–100%
199	Dimmer 18	000 ⇄ 255	0–100%
200	Dimmer fine 18	000 ⇄ 255	0–100%
201	Red 18	000 ⇄ 255	0–100%
202	Red fine 18	000 ⇄ 255	0–100%
203	Green 18	000 ⇄ 255	0–100%
204	Green fine 18	000 ⇄ 255	0–100%

# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
205	Blue 18	000 ⇔ 255	0–100%
206	Blue fine 18	000 ⇔ 255	0–100%
207	White 18	000 ⇔ 255	0–100%
208	White fine 18	000 ⇔ 255	0–100%
209	Dimmer 19	000 ⇔ 255	0–100%
210	Dimmer fine 19	000 ⇔ 255	0–100%
211	Red 19	000 ⇔ 255	0–100%
212	Red fine 19	000 ⇔ 255	0–100%
213	Green 19	000 ⇔ 255	0–100%
214	Green fine 19	000 ⇔ 255	0–100%
215	Blue 19	000 ⇔ 255	0–100%
216	Blue fine 19	000 ⇔ 255	0–100%
217	White 19	000 ⇔ 255	0–100%
218	White fine 19	000 ⇔ 255	0–100%
219	Dimmer 20	000 ⇔ 255	0–100%
220	Dimmer fine 20	000 ⇔ 255	0–100%
221	Red 20	000 ⇔ 255	0–100%
222	Red fine 20	000 ⇔ 255	0–100%
223	Green 20	000 ⇔ 255	0–100%
224	Green fine 20	000 ⇔ 255	0–100%
225	Blue 20	000 ⇔ 255	0–100%
226	Blue fine 20	000 ⇔ 255	0–100%
227	White 20	000 ⇔ 255	0–100%
228	White fine 20	000 ⇔ 255	0–100%
229	Dimmer 21	000 ⇔ 255	0–100%
230	Dimmer fine 21	000 ⇔ 255	0–100%
231	Red 21	000 ⇔ 255	0–100%
232	Red fine 21	000 ⇔ 255	0–100%
233	Green 21	000 ⇔ 255	0–100%
234	Green fine 21	000 ⇔ 255	0–100%
235	Blue 21	000 ⇔ 255	0–100%
236	Blue fine 21	000 ⇔ 255	0–100%
237	White 21	000 ⇔ 255	0–100%
238	White fine 21	000 ⇔ 255	0–100%
239	Dimmer 22	000 ⇔ 255	0–100%
240	Dimmer fine 22	000 ⇔ 255	0–100%
241	Red 22	000 ⇔ 255	0–100%
242	Red fine 22	000 ⇔ 255	0–100%
243	Green 22	000 ⇔ 255	0–100%
244	Green fine 22	000 ⇔ 255	0–100%
245	Blue 22	000 ⇔ 255	0–100%
246	Blue fine 22	000 ⇔ 255	0–100%
247	White 22	000 ⇔ 255	0–100%
248	White fine 22	000 ⇔ 255	0–100%
249	Dimmer 23	000 ⇔ 255	0–100%
250	Dimmer fine 23	000 ⇔ 255	0–100%
251	Red 23	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
252	Red fine 23	000 ⇄ 255	0–100%
253	Green 23	000 ⇄ 255	0–100%
254	Green fine 23	000 ⇄ 255	0–100%
255	Blue 23	000 ⇄ 255	0–100%
256	Blue fine 23	000 ⇄ 255	0–100%
257	White 23	000 ⇄ 255	0–100%
258	White fine 23	000 ⇄ 255	0–100%
259	Dimmer 24	000 ⇄ 255	0–100%
260	Dimmer fine 24	000 ⇄ 255	0–100%
261	Red 24	000 ⇄ 255	0–100%
262	Red fine 24	000 ⇄ 255	0–100%
263	Green 24	000 ⇄ 255	0–100%
264	Green fine 24	000 ⇄ 255	0–100%
265	Blue 24	000 ⇄ 255	0–100%
266	Blue fine 24	000 ⇄ 255	0–100%
267	White 24	000 ⇄ 255	0–100%
268	White fine 24	000 ⇄ 255	0–100%
269	Dimmer 25	000 ⇄ 255	0–100%
270	Dimmer fine 25	000 ⇄ 255	0–100%
271	Red 25	000 ⇄ 255	0–100%
272	Red fine 25	000 ⇄ 255	0–100%
273	Green 25	000 ⇄ 255	0–100%
274	Green fine 25	000 ⇄ 255	0–100%
275	Blue 25	000 ⇄ 255	0–100%
276	Blue fine 25	000 ⇄ 255	0–100%
277	White 25	000 ⇄ 255	0–100%
278	White fine 25	000 ⇄ 255	0–100%
279	Dimmer 26	000 ⇄ 255	0–100%
280	Dimmer fine 26	000 ⇄ 255	0–100%
281	Red 26	000 ⇄ 255	0–100%
282	Red fine 26	000 ⇄ 255	0–100%
283	Green 26	000 ⇄ 255	0–100%
284	Green fine 26	000 ⇄ 255	0–100%
285	Blue 26	000 ⇄ 255	0–100%
286	Blue fine 26	000 ⇄ 255	0–100%
287	White 26	000 ⇄ 255	0–100%
288	White fine 26	000 ⇄ 255	0–100%
289	Dimmer 27	000 ⇄ 255	0–100%
290	Dimmer fine 27	000 ⇄ 255	0–100%
291	Red 27	000 ⇄ 255	0–100%
292	Red fine 27	000 ⇄ 255	0–100%
293	Green 27	000 ⇄ 255	0–100%
294	Green fine 27	000 ⇄ 255	0–100%
295	Blue 27	000 ⇄ 255	0–100%
296	Blue fine 27	000 ⇄ 255	0–100%
297	White 27	000 ⇄ 255	0–100%
298	White fine 27	000 ⇄ 255	0–100%

# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
299	Dimmer 28	000 ⇔ 255	0-100%
300	Dimmer fine 28	000 ⇔ 255	0-100%
301	Red 28	000 ⇔ 255	0-100%
302	Red fine 28	000 ⇔ 255	0-100%
303	Green 28	000 ⇔ 255	0-100%
304	Green fine 28	000 ⇔ 255	0-100%
305	Blue 28	000 ⇔ 255	0-100%
306	Blue fine 28	000 ⇔ 255	0-100%
307	White 28	000 ⇔ 255	0-100%
308	White fine 28	000 ⇔ 255	0-100%

### Advanced (252 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Color macro (inner plate)		
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Background color (inner plate)		
13	Background dimmer (ring)	000 ⇔ 255	0–100%
	Background dimmer (inner plate)		
14	Background dimmer fine (ring)	000 ⇔ 255	0–100%
	Background dimmer fine (inner plate)		
15	Dimmer (ring)	000 ⇔ 255	0–100%
	Dimmer (inner plate)		
16	Dimmer fine (ring)	000 ⇔ 255	0–100%
	Dimmer fine (inner plate)		
17	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
	Shutter (inner plate)		
18	Ring zoom	000 ⇔ 255	Wide to narrow
19	Main zoom	000 ⇔ 255	Wide to narrow
20	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
21	Red (ring)	000 ⇔ 255	0–100%
	Red (inner plate)		
22	Red fine (ring)	000 ⇔ 255	0–100%
	Red fine (inner plate)		
23	Green (ring)	000 ⇔ 255	0–100%
	Green (inner plate)		
24	Green fine (ring)	000 ⇔ 255	0–100%
	Green fine (inner plate)		
25	Blue (ring)	000 ⇔ 255	0–100%
	Blue (inner plate)		
26	Blue fine (ring)	000 ⇔ 255	0–100%
	Blue fine (inner plate)		



## DMX CHART



Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
27	White (ring)	000 ⇔ 255	0–100%
	White (inner plate)		
28	White fine (ring)	000 ⇔ 255	0–100%
	White fine (inner plate)		
29	Red 1	000 ⇔ 255	0–100%
30	Red fine 1	000 ⇔ 255	0–100%
31	Green 1	000 ⇔ 255	0–100%
32	Green fine 1	000 ⇔ 255	0–100%
33	Blue 1	000 ⇔ 255	0–100%
34	Blue fine 1	000 ⇔ 255	0–100%
35	White 1	000 ⇔ 255	0–100%
36	White fine 1	000 ⇔ 255	0–100%
37	Red 2	000 ⇔ 255	0–100%
38	Red fine 2	000 ⇔ 255	0–100%
39	Green 2	000 ⇔ 255	0–100%
40	Green fine 2	000 ⇔ 255	0–100%
41	Blue 2	000 ⇔ 255	0–100%
42	Blue fine 2	000 ⇔ 255	0–100%
43	White 2	000 ⇔ 255	0–100%
44	White fine 2	000 ⇔ 255	0–100%
45	Red 3	000 ⇔ 255	0–100%
46	Red fine 3	000 ⇔ 255	0–100%
47	Green 3	000 ⇔ 255	0–100%
48	Green fine 3	000 ⇔ 255	0–100%
49	Blue 3	000 ⇔ 255	0–100%
50	Blue fine 3	000 ⇔ 255	0–100%
51	White 3	000 ⇔ 255	0–100%
52	White fine 3	000 ⇔ 255	0–100%
53	Red 4	000 ⇔ 255	0–100%
54	Red fine 4	000 ⇔ 255	0–100%
55	Green 4	000 ⇔ 255	0–100%
56	Green fine 4	000 ⇔ 255	0–100%
57	Blue 4	000 ⇔ 255	0–100%
58	Blue fine 4	000 ⇔ 255	0–100%
59	White 4	000 ⇔ 255	0–100%
60	White fine 4	000 ⇔ 255	0–100%
61	Red 5	000 ⇔ 255	0–100%
62	Red fine 5	000 ⇔ 255	0–100%
63	Green 5	000 ⇔ 255	0–100%
64	Green fine 5	000 ⇔ 255	0–100%
65	Blue 5	000 ⇔ 255	0–100%
66	Blue fine 5	000 ⇔ 255	0–100%
67	White 5	000 ⇔ 255	0–100%
68	White fine 5	000 ⇔ 255	0–100%
69	Red 6	000 ⇔ 255	0–100%
70	Red fine 6	000 ⇔ 255	0–100%
71	Green 6	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
72	Green fine 6	000 ⇔ 255	0–100%
73	Blue 6	000 ⇔ 255	0–100%
74	Blue fine 6	000 ⇔ 255	0–100%
75	White 6	000 ⇔ 255	0–100%
76	White fine 6	000 ⇔ 255	0–100%
77	Red 7	000 ⇔ 255	0–100%
78	Red fine 7	000 ⇔ 255	0–100%
79	Green 7	000 ⇔ 255	0–100%
80	Green fine 7	000 ⇔ 255	0–100%
81	Blue 7	000 ⇔ 255	0–100%
82	Blue fine 7	000 ⇔ 255	0–100%
83	White 7	000 ⇔ 255	0–100%
84	White fine 7	000 ⇔ 255	0–100%
85	Red 8	000 ⇔ 255	0–100%
86	Red fine 8	000 ⇔ 255	0–100%
87	Green 8	000 ⇔ 255	0–100%
88	Green fine 8	000 ⇔ 255	0–100%
89	Blue 8	000 ⇔ 255	0–100%
90	Blue fine 8	000 ⇔ 255	0–100%
91	White 8	000 ⇔ 255	0–100%
92	White fine 8	000 ⇔ 255	0–100%
93	Red 9	000 ⇔ 255	0–100%
94	Red fine 9	000 ⇔ 255	0–100%
95	Green 9	000 ⇔ 255	0–100%
96	Green fine 9	000 ⇔ 255	0–100%
97	Blue 9	000 ⇔ 255	0–100%
98	Blue fine 9	000 ⇔ 255	0–100%
99	White 9	000 ⇔ 255	0–100%
100	White fine 9	000 ⇔ 255	0–100%
101	Red 10	000 ⇔ 255	0–100%
102	Red fine 10	000 ⇔ 255	0–100%
103	Green 10	000 ⇔ 255	0–100%
104	Green fine 10	000 ⇔ 255	0–100%
105	Blue 10	000 ⇔ 255	0–100%
106	Blue fine 10	000 ⇔ 255	0–100%
107	White 10	000 ⇔ 255	0–100%
108	White fine 10	000 ⇔ 255	0–100%
109	Red 11	000 ⇔ 255	0–100%
110	Red fine 11	000 ⇔ 255	0–100%
111	Green 11	000 ⇔ 255	0–100%
112	Green fine 11	000 ⇔ 255	0–100%
113	Blue 11	000 ⇔ 255	0–100%
114	Blue fine 11	000 ⇔ 255	0–100%
115	White 11	000 ⇔ 255	0–100%
116	White fine 11	000 ⇔ 255	0–100%
117	Red 12	000 ⇔ 255	0–100%
118	Red fine 12	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
119	Green 12	000 ⇄ 255	0–100%
120	Green fine 12	000 ⇄ 255	0–100%
121	Blue 12	000 ⇄ 255	0–100%
122	Blue fine 12	000 ⇄ 255	0–100%
123	White 12	000 ⇄ 255	0–100%
124	White fine 12	000 ⇄ 255	0–100%
125	Red 13	000 ⇄ 255	0–100%
126	Red fine 13	000 ⇄ 255	0–100%
127	Green 13	000 ⇄ 255	0–100%
128	Green fine 13	000 ⇄ 255	0–100%
129	Blue 13	000 ⇄ 255	0–100%
130	Blue fine 13	000 ⇄ 255	0–100%
131	White 13	000 ⇄ 255	0–100%
132	White fine 13	000 ⇄ 255	0–100%
133	Red 14	000 ⇄ 255	0–100%
134	Red fine 14	000 ⇄ 255	0–100%
135	Green 14	000 ⇄ 255	0–100%
136	Green fine 14	000 ⇄ 255	0–100%
137	Blue 14	000 ⇄ 255	0–100%
138	Blue fine 14	000 ⇄ 255	0–100%
139	White 14	000 ⇄ 255	0–100%
140	White fine 14	000 ⇄ 255	0–100%
141	Red 15	000 ⇄ 255	0–100%
142	Red fine 15	000 ⇄ 255	0–100%
143	Green 15	000 ⇄ 255	0–100%
144	Green fine 15	000 ⇄ 255	0–100%
145	Blue 15	000 ⇄ 255	0–100%
146	Blue fine 15	000 ⇄ 255	0–100%
147	White 15	000 ⇄ 255	0–100%
148	White fine 15	000 ⇄ 255	0–100%
149	Red 16	000 ⇄ 255	0–100%
150	Red fine 16	000 ⇄ 255	0–100%
151	Green 16	000 ⇄ 255	0–100%
152	Green fine 16	000 ⇄ 255	0–100%
153	Blue 16	000 ⇄ 255	0–100%
154	Blue fine 16	000 ⇄ 255	0–100%
155	White 16	000 ⇄ 255	0–100%
156	White fine 16	000 ⇄ 255	0–100%
157	Red 17	000 ⇄ 255	0–100%
158	Red fine 17	000 ⇄ 255	0–100%
159	Green 17	000 ⇄ 255	0–100%
160	Green fine 17	000 ⇄ 255	0–100%
161	Blue 17	000 ⇄ 255	0–100%
162	Blue fine 17	000 ⇄ 255	0–100%
163	White 17	000 ⇄ 255	0–100%
164	White fine 17	000 ⇄ 255	0–100%
165	Red 18	000 ⇄ 255	0–100%

Channel	Function	Value	Percent/Setting
166	Red fine 18	000 ⇔ 255	0–100%
167	Green 18	000 ⇔ 255	0–100%
168	Green fine 18	000 ⇔ 255	0–100%
169	Blue 18	000 ⇔ 255	0–100%
170	Blue fine 18	000 ⇔ 255	0–100%
171	White 18	000 ⇔ 255	0–100%
172	White fine 18	000 ⇔ 255	0–100%
173	Red 19	000 ⇔ 255	0–100%
174	Red fine 19	000 ⇔ 255	0–100%
175	Green 19	000 ⇔ 255	0–100%
176	Green fine 19	000 ⇔ 255	0–100%
177	Blue 19	000 ⇔ 255	0–100%
178	Blue fine 19	000 ⇔ 255	0–100%
179	White 19	000 ⇔ 255	0–100%
180	White fine 19	000 ⇔ 255	0–100%
181	Red 20	000 ⇔ 255	0–100%
182	Red fine 20	000 ⇔ 255	0–100%
183	Green 20	000 ⇔ 255	0–100%
184	Green fine 20	000 ⇔ 255	0–100%
185	Blue 20	000 ⇔ 255	0–100%
186	Blue fine 20	000 ⇔ 255	0–100%
187	White 20	000 ⇔ 255	0–100%
188	White fine 20	000 ⇔ 255	0–100%
189	Red 21	000 ⇔ 255	0–100%
190	Red fine 21	000 ⇔ 255	0–100%
191	Green 21	000 ⇔ 255	0–100%
192	Green fine 21	000 ⇔ 255	0–100%
193	Blue 21	000 ⇔ 255	0–100%
194	Blue fine 21	000 ⇔ 255	0–100%
195	White 21	000 ⇔ 255	0–100%
196	White fine 21	000 ⇔ 255	0–100%
197	Red 22	000 ⇔ 255	0–100%
198	Red fine 22	000 ⇔ 255	0–100%
199	Green 22	000 ⇔ 255	0–100%
200	Green fine 22	000 ⇔ 255	0–100%
201	Blue 22	000 ⇔ 255	0–100%
202	Blue fine 22	000 ⇔ 255	0–100%
203	White 22	000 ⇔ 255	0–100%
204	White fine 22	000 ⇔ 255	0–100%
205	Red 23	000 ⇔ 255	0–100%
206	Red fine 23	000 ⇔ 255	0–100%
207	Green 23	000 ⇔ 255	0–100%
208	Green fine 23	000 ⇔ 255	0–100%
209	Blue 23	000 ⇔ 255	0–100%
210	Blue fine 23	000 ⇔ 255	0–100%
211	White 23	000 ⇔ 255	0–100%
212	White fine 23	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
213	Red 24	000 ⇔ 255	0–100%
214	Red fine 24	000 ⇔ 255	0–100%
215	Green 24	000 ⇔ 255	0–100%
216	Green fine 24	000 ⇔ 255	0–100%
217	Blue 24	000 ⇔ 255	0–100%
218	Blue fine 24	000 ⇔ 255	0–100%
219	White 24	000 ⇔ 255	0–100%
220	White fine 24	000 ⇔ 255	0–100%
221	Red 25	000 ⇔ 255	0–100%
222	Red fine 25	000 ⇔ 255	0–100%
223	Green 25	000 ⇔ 255	0–100%
224	Green fine 25	000 ⇔ 255	0–100%
225	Blue 25	000 ⇔ 255	0–100%
226	Blue fine 25	000 ⇔ 255	0–100%
227	White 25	000 ⇔ 255	0–100%
228	White fine 25	000 ⇔ 255	0–100%
229	Red 26	000 ⇔ 255	0–100%
230	Red fine 26	000 ⇔ 255	0–100%
231	Green 26	000 ⇔ 255	0–100%
232	Green fine 26	000 ⇔ 255	0–100%
233	Blue 26	000 ⇔ 255	0–100%
234	Blue fine 26	000 ⇔ 255	0–100%
235	White 26	000 ⇔ 255	0–100%
236	White fine 26	000 ⇔ 255	0–100%
237	Red 27	000 ⇔ 255	0–100%
238	Red fine 27	000 ⇔ 255	0–100%
239	Green 27	000 ⇔ 255	0–100%
240	Green fine 27	000 ⇔ 255	0–100%
241	Blue 27	000 ⇔ 255	0–100%
242	Blue fine 27	000 ⇔ 255	0–100%
243	White 27	000 ⇔ 255	0–100%
244	White fine 27	000 ⇔ 255	0–100%
245	Red 28	000 ⇔ 255	0–100%
246	Red fine 28	000 ⇔ 255	0–100%
247	Green 28	000 ⇔ 255	0–100%
248	Green fine 28	000 ⇔ 255	0–100%
249	Blue 28	000 ⇔ 255	0–100%
250	Blue fine 28	000 ⇔ 255	0–100%
251	White 28	000 ⇔ 255	0–100%
252	White fine 28	000 ⇔ 255	0–100%

### Standard (134 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Color macro (inner plate)		
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Background color (inner plate)		
13	Background dimmer (ring)	000 ⇔ 255	0–100%
	Background dimmer (inner plate)		
14	Dimmer (ring)	000 ⇔ 255	0–100%
	Dimmer (inner plate)		
15	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
	Shutter (inner plate)	000 ⇔ 255	
16	Ring zoom	000 ⇔ 255	Wide to narrow
17	Main zoom	000 ⇔ 255	Wide to narrow
18	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
19	Red (ring)	000 ⇔ 255	0–100%
	Red (inner plate)		
20	Green (ring)	000 ⇔ 255	0–100%
	Green (inner plate)		
21	Blue (ring)	000 ⇔ 255	0–100%
	Blue (inner plate)		
22	White (ring)	000 ⇔ 255	0–100%
	White (inner plate)		
23	Red 1	000 ⇔ 255	0–100%
24	Green 1	000 ⇔ 255	0–100%
25	Blue 1	000 ⇔ 255	0–100%
26	White 1	000 ⇔ 255	0–100%
27	Red 2	000 ⇔ 255	0–100%
28	Green 2	000 ⇔ 255	0–100%
29	Blue 2	000 ⇔ 255	0–100%
30	White 2	000 ⇔ 255	0–100%
31	Red 3	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
32	Green 3	000 ⇔ 255	0–100%
33	Blue 3	000 ⇔ 255	0–100%
34	White 3	000 ⇔ 255	0–100%
35	Red 4	000 ⇔ 255	0–100%
36	Green 4	000 ⇔ 255	0–100%
37	Blue 4	000 ⇔ 255	0–100%
38	White 4	000 ⇔ 255	0–100%
39	Red 5	000 ⇔ 255	0–100%
40	Green 5	000 ⇔ 255	0–100%
41	Blue 5	000 ⇔ 255	0–100%
42	White 5	000 ⇔ 255	0–100%
43	Red 6	000 ⇔ 255	0–100%
44	Green 6	000 ⇔ 255	0–100%
45	Blue 6	000 ⇔ 255	0–100%
46	White 6	000 ⇔ 255	0–100%
47	Red 7	000 ⇔ 255	0–100%
48	Green 7	000 ⇔ 255	0–100%
49	Blue 7	000 ⇔ 255	0–100%
50	White 7	000 ⇔ 255	0–100%
51	Red 8	000 ⇔ 255	0–100%
52	Green 8	000 ⇔ 255	0–100%
53	Blue 8	000 ⇔ 255	0–100%
54	White 8	000 ⇔ 255	0–100%
55	Red 9	000 ⇔ 255	0–100%
56	Green 9	000 ⇔ 255	0–100%
57	Blue 9	000 ⇔ 255	0–100%
58	White 9	000 ⇔ 255	0–100%
59	Red 10	000 ⇔ 255	0–100%
60	Green 10	000 ⇔ 255	0–100%
61	Blue 10	000 ⇔ 255	0–100%
62	White 10	000 ⇔ 255	0–100%
63	Red 11	000 ⇔ 255	0–100%
64	Green 11	000 ⇔ 255	0–100%
65	Blue 11	000 ⇔ 255	0–100%
66	White 11	000 ⇔ 255	0–100%
67	Red 12	000 ⇔ 255	0–100%
68	Green 12	000 ⇔ 255	0–100%
69	Blue 12	000 ⇔ 255	0–100%
70	White 12	000 ⇔ 255	0–100%
71	Red 13	000 ⇔ 255	0–100%
72	Green 13	000 ⇔ 255	0–100%
73	Blue 13	000 ⇔ 255	0–100%
74	White 13	000 ⇔ 255	0–100%
75	Red 14	000 ⇔ 255	0–100%
76	Green 14	000 ⇔ 255	0–100%
77	Blue 14	000 ⇔ 255	0–100%
78	White 14	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
79	Red 15	000 ⇄ 255	0-100%
80	Green 15	000 ⇄ 255	0-100%
81	Blue 15	000 ⇄ 255	0-100%
82	White 15	000 ⇄ 255	0-100%
83	Red 16	000 ⇄ 255	0-100%
84	Green 16	000 ⇄ 255	0-100%
85	Blue 16	000 ⇄ 255	0-100%
86	White 16	000 ⇄ 255	0-100%
87	Red 17	000 ⇄ 255	0-100%
88	Green 17	000 ⇄ 255	0-100%
89	Blue 17	000 ⇄ 255	0-100%
90	White 17	000 ⇄ 255	0-100%
91	Red 18	000 ⇄ 255	0-100%
92	Green 18	000 ⇄ 255	0-100%
93	Blue 18	000 ⇄ 255	0-100%
94	White 18	000 ⇄ 255	0-100%
95	Red 19	000 ⇄ 255	0-100%
96	Green 19	000 ⇄ 255	0-100%
97	Blue 19	000 ⇄ 255	0-100%
98	White 19	000 ⇄ 255	0-100%
99	Red 20	000 ⇄ 255	0-100%
100	Green 20	000 ⇄ 255	0-100%
101	Blue 20	000 ⇄ 255	0-100%
102	White 20	000 ⇄ 255	0-100%
103	Red 21	000 ⇄ 255	0-100%
104	Green 21	000 ⇄ 255	0-100%
105	Blue 21	000 ⇄ 255	0-100%
106	White 21	000 ⇄ 255	0-100%
107	Red 22	000 ⇄ 255	0-100%
108	Green 22	000 ⇄ 255	0-100%
109	Blue 22	000 ⇄ 255	0-100%
110	White 22	000 ⇄ 255	0-100%
111	Red 23	000 ⇄ 255	0-100%
112	Green 23	000 ⇄ 255	0-100%
113	Blue 23	000 ⇄ 255	0-100%
114	White 23	000 ⇄ 255	0-100%
115	Red 24	000 ⇄ 255	0-100%
116	Green 24	000 ⇄ 255	0-100%
117	Blue 24	000 ⇄ 255	0-100%
118	White 24	000 ⇄ 255	0-100%
119	Red 25	000 ⇄ 255	0-100%
120	Green 25	000 ⇄ 255	0-100%
121	Blue 25	000 ⇄ 255	0-100%
122	White 25	000 ⇄ 255	0-100%
123	Red 26	000 ⇄ 255	0-100%
124	Green 26	000 ⇄ 255	0-100%
125	Blue 26	000 ⇄ 255	0-100%



## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
126	White 26	000 ⇔ 255	0–100%
127	Red 27	000 ⇔ 255	0–100%
128	Green 27	000 ⇔ 255	0–100%
129	Blue 27	000 ⇔ 255	0–100%
130	White 27	000 ⇔ 255	0–100%
131	Red 28	000 ⇔ 255	0–100%
132	Green 28	000 ⇔ 255	0–100%
133	Blue 28	000 ⇔ 255	0–100%
134	White 28	000 ⇔ 255	0–100%

### Standard2 (41 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
8	Color macro (inner plate)		
9	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
10	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
11	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
12	LED macro delay	000 ⇔ 255	Fast to slow
13	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
14	Background color (inner plate)		
15	Background dimmer (ring)	000 ⇔ 255	0–100%
16	Background dimmer (inner plate)	000 ⇔ 255	0–100%
17	Dimmer (ring)	000 ⇔ 255	0–100%
18	Dimmer fine (ring)	000 ⇔ 255	0–100%
19	Dimmer (inner plate)	000 ⇔ 255	0–100%
20	Dimmer fine (inner plate)	000 ⇔ 255	0–100%
21	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
22	Shutter	000 ⇔ 255	
23	Ring zoom	000 ⇔ 255	Wide to narrow
24	Main zoom	000 ⇔ 255	Wide to narrow
25	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
26	Red (ring)	000 ⇔ 255	0–100%
27	Red (inner plate)	000 ⇔ 255	0–100%
28	Red fine (ring)	000 ⇔ 255	0–100%
29	Red fine (inner plate)	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
30	Green (ring)	000 ⇔ 255	0–100%
31	Green (inner plate)	000 ⇔ 255	0–100%
32	Green fine (ring)	000 ⇔ 255	0–100%
33	Green fine (inner plate)	000 ⇔ 255	0–100%
34	Blue (ring)	000 ⇔ 255	0–100%
35	Blue (inner plate)	000 ⇔ 255	0–100%
36	Blue fine (ring)	000 ⇔ 255	0–100%
37	Blue fine (inner plate)	000 ⇔ 255	0–100%
38	White (ring)	000 ⇔ 255	0–100%
39	White (inner plate)	000 ⇔ 255	0–100%
40	White fine (ring)	000 ⇔ 255	0–100%
41	White fine (inner plate)	000 ⇔ 255	0–100%

### Basic2 (27 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Color macro (inner plate)		
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Background color (inner plate)		
13	Background dimmer (ring)	000 ⇔ 255	0–100%
	Background dimmer (inner plate)		
14	Dimmer (ring)	000 ⇔ 255	0–100%
	Dimmer (inner plate)		
15	Dimmer fine (ring)	000 ⇔ 255	0–100%
	Dimmer fine (inner plate)		
16	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
	Shutter		
17	Ring zoom	000 ⇔ 255	Wide to narrow
18	Main zoom	000 ⇔ 255	Wide to narrow
19	Control	000 ⇔ 255	See <a href="#">Control Chart</a>

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
20	Red (ring)	000 ⇔ 255	0–100%
	Red (inner plate)		
21	Red fine (ring)	000 ⇔ 255	0–100%
	Red fine (inner plate)		
22	Green (ring)	000 ⇔ 255	0–100%
	Green (inner plate)		
23	Green fine (ring)	000 ⇔ 255	0–100%
	Green fine (inner plate)		
24	Blue (ring)	000 ⇔ 255	0–100%
	Blue (inner plate)		
25	Blue fine (ring)	000 ⇔ 255	0–100%
	Blue fine (inner plate)		
26	White (ring)	000 ⇔ 255	0–100%
	White (inner plate)		
27	White fine (ring)	000 ⇔ 255	0–100%
	White fine (inner plate)		


#### Basic (22 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/Tilt speed	000 ⇔ 255	Pan/Tilt speed, fast to slow
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700K
7	Color macro (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Color macro (inner plate)		
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color (ring)	000 ⇔ 255	See <a href="#">Color Chart</a>
	Background color (inner plate)		
13	Background dimmer (ring)	000 ⇔ 255	0–100%
	Background dimmer (inner plate)		
14	Dimmer (ring)	000 ⇔ 255	0–100%
	Dimmer (inner plate)		
15	Shutter (ring)	000 ⇔ 255	See <a href="#">Strobe Chart</a>
	Shutter		
16	Ring zoom	000 ⇔ 255	Wide to narrow

Channel	Function	Value	Percent/Setting
17	Main zoom	000 ⇔ 255	Wide to narrow
18	Control	000 ⇔ 255	See <a href="#">Control Chart</a>
19	Red (ring)	000 ⇔ 255	0–100%
	Red (inner plate)		
20	Green (ring)	000 ⇔ 255	0–100%
	Green (inner plate)		
21	Blue (ring)	000 ⇔ 255	0–100%
	Blue (inner plate)		
22	White (ring)	000 ⇔ 255	0–100%
	White (inner plate)		

### Pixel Chart

Rear panel

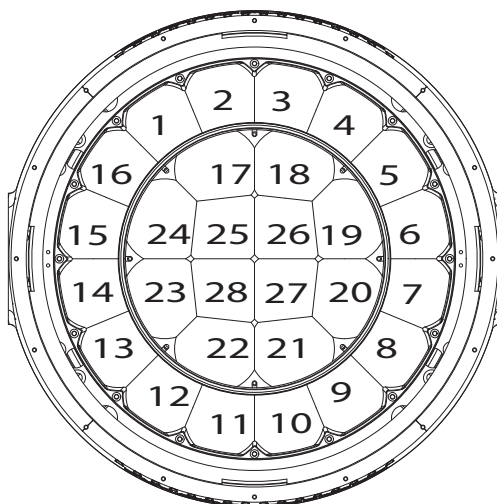

Front panel

## DMX CHART



Maverick Storm 3 BeamWash- V1.230424

### Dual Control Movement Values

Advanced (28 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/tilt speed	000 ⇔ 255	0–100%
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700 K
7	Color macro	000 ⇔ 255	See <a href="#">Color Chart</a>
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color	000 ⇔ 255	See <a href="#">Color Chart</a>
13	Background dimmer	000 ⇔ 255	0–100%
14	Background fine dimmer	000 ⇔ 255	0–100%
15	Main dimmer	000 ⇔ 255	0–100%
16	Main fine dimmer	000 ⇔ 255	0–100%
17	Shutter	000 ⇔ 255	See <a href="#">Strobe Chart</a>
18	Ring Zoom	000 ⇔ 255	Wide to narrow
19	Main Zoom	000 ⇔ 255	Wide to narrow
20	Control	000 ⇔ 009	See <a href="#">Control Chart</a>
21	Main red	000 ⇔ 255	0–100%
22	Main red fine	000 ⇔ 255	0–100%
23	Main green	000 ⇔ 255	0–100%
24	Main green fine	000 ⇔ 255	0–100%
25	Main blue	000 ⇔ 255	0–100%
26	Main blue fine	000 ⇔ 255	0–100%
27	Main white	000 ⇔ 255	0–100%
28	Main white fine	000 ⇔ 255	0–100%

### Standard (22 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/tilt speed	000 ⇔ 255	0–100%
6	CTC	000	No function
		001 ⇔ 255	Color temperature, 19000–2700 K
7	Color macro	000 ⇔ 255	See <a href="#">Color Chart</a>
8	Gobo	000	No function
		001 ⇔ 255	Gobos (indexed)
9	LED macro/ Auto program	000 ⇔ 015	No function
		016 ⇔ 135	LED macros
		136 ⇔ 255	Auto programs
10	LED macro/ Auto program speed	000 ⇔ 127	Auto speed, fast to slow
		128	Hold
		129 ⇔ 255	Auto speed, slow to fast
11	LED macro delay	000 ⇔ 255	Fast to slow
12	Background color	000 ⇔ 255	See <a href="#">Color Chart</a>
13	Background dimmer	000 ⇔ 255	0–100%
14	Main dimmer	000 ⇔ 255	0–100%
15	Shutter	000 ⇔ 255	See <a href="#">Strobe Chart</a>
16	Ring Zoom	000 ⇔ 255	Wide to narrow
17	Main Zoom	000 ⇔ 255	Wide to narrow
18	Control	000 ⇔ 009	See <a href="#">Control Chart</a>
19	Main red	000 ⇔ 255	0–100%
20	Main green	000 ⇔ 255	0–100%
21	Main blue	000 ⇔ 255	0–100%
22	Main white	000 ⇔ 255	0–100%

### Basic (10 channels)

Channel	Function	Value	Percent/Setting
1	Pan	000 ⇔ 255	0–100%
2	Pan fine	000 ⇔ 255	0–100%
3	Tilt	000 ⇔ 255	0–100%
4	Tilt fine	000 ⇔ 255	0–100%
5	Pan/tilt speed	000 ⇔ 255	0–100%
6	Main dimmer	000 ⇔ 255	0–100%
7	Shutter	000 ⇔ 255	See <a href="#">Strobe Chart</a>
8	Ring Zoom	000 ⇔ 255	Wide to narrow
9	Main Zoom	000 ⇔ 255	Wide to narrow
10	Control	000 ⇔ 009	See <a href="#">Control Chart</a>

## DMX CHART



Maverick Storm 3 BeamWash- V1.230424

### Dual Control Pixels Values

Advanced (224 channels)

Channel	Function	Value	Percent/Setting
1	Red 1	000 ⇔ 255	0–100%
2	Red fine 1	000 ⇔ 255	0–100%
3	Green 1	000 ⇔ 255	0–100%
4	Green fine 1	000 ⇔ 255	0–100%
5	Blue 1	000 ⇔ 255	0–100%
6	Blue fine 1	000 ⇔ 255	0–100%
7	White 1	000 ⇔ 255	0–100%
8	White fine 1	000 ⇔ 255	0–100%
9	Red 2	000 ⇔ 255	0–100%
10	Red fine 2	000 ⇔ 255	0–100%
11	Green 2	000 ⇔ 255	0–100%
12	Green fine 2	000 ⇔ 255	0–100%
13	Blue 2	000 ⇔ 255	0–100%
14	Blue fine 2	000 ⇔ 255	0–100%
15	White 2	000 ⇔ 255	0–100%
16	White fine 2	000 ⇔ 255	0–100%
17	Red 3	000 ⇔ 255	0–100%
18	Red fine 3	000 ⇔ 255	0–100%
19	Green 3	000 ⇔ 255	0–100%
20	Green fine 3	000 ⇔ 255	0–100%
21	Blue 3	000 ⇔ 255	0–100%
22	Blue fine 3	000 ⇔ 255	0–100%
23	White 3	000 ⇔ 255	0–100%
24	White fine 3	000 ⇔ 255	0–100%
25	Red 4	000 ⇔ 255	0–100%
26	Red fine 4	000 ⇔ 255	0–100%
27	Green 4	000 ⇔ 255	0–100%
28	Green fine 4	000 ⇔ 255	0–100%
29	Blue 4	000 ⇔ 255	0–100%
30	Blue fine 4	000 ⇔ 255	0–100%
31	White 4	000 ⇔ 255	0–100%
32	White fine 4	000 ⇔ 255	0–100%
33	Red 5	000 ⇔ 255	0–100%
34	Red fine 5	000 ⇔ 255	0–100%
35	Green 5	000 ⇔ 255	0–100%
36	Green fine 5	000 ⇔ 255	0–100%
37	Blue 5	000 ⇔ 255	0–100%
38	Blue fine 5	000 ⇔ 255	0–100%
39	White 5	000 ⇔ 255	0–100%
40	White fine 5	000 ⇔ 255	0–100%
41	Red 6	000 ⇔ 255	0–100%
42	Red fine 6	000 ⇔ 255	0–100%
43	Green 6	000 ⇔ 255	0–100%
44	Green fine 6	000 ⇔ 255	0–100%
45	Blue 6	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
46	Blue fine 6	000 ⇄ 255	0–100%
47	White 6	000 ⇄ 255	0–100%
48	White fine 6	000 ⇄ 255	0–100%
49	Red 7	000 ⇄ 255	0–100%
50	Red fine 7	000 ⇄ 255	0–100%
51	Green 7	000 ⇄ 255	0–100%
52	Green fine 7	000 ⇄ 255	0–100%
53	Blue 7	000 ⇄ 255	0–100%
54	Blue fine 7	000 ⇄ 255	0–100%
55	White 7	000 ⇄ 255	0–100%
56	White fine 7	000 ⇄ 255	0–100%
57	Red 8	000 ⇄ 255	0–100%
58	Red fine 8	000 ⇄ 255	0–100%
59	Green 8	000 ⇄ 255	0–100%
60	Green fine 8	000 ⇄ 255	0–100%
61	Blue 8	000 ⇄ 255	0–100%
62	Blue fine 8	000 ⇄ 255	0–100%
63	White 8	000 ⇄ 255	0–100%
64	White fine 8	000 ⇄ 255	0–100%
65	Red 9	000 ⇄ 255	0–100%
66	Red fine 9	000 ⇄ 255	0–100%
67	Green 9	000 ⇄ 255	0–100%
68	Green fine 9	000 ⇄ 255	0–100%
69	Blue 9	000 ⇄ 255	0–100%
70	Blue fine 9	000 ⇄ 255	0–100%
71	White 9	000 ⇄ 255	0–100%
72	White fine 9	000 ⇄ 255	0–100%
73	Red 10	000 ⇄ 255	0–100%
74	Red fine 10	000 ⇄ 255	0–100%
75	Green 10	000 ⇄ 255	0–100%
76	Green fine 10	000 ⇄ 255	0–100%
77	Blue 10	000 ⇄ 255	0–100%
78	Blue fine 10	000 ⇄ 255	0–100%
79	White 10	000 ⇄ 255	0–100%
80	White fine 10	000 ⇄ 255	0–100%
81	Red 11	000 ⇄ 255	0–100%
82	Red fine 11	000 ⇄ 255	0–100%
83	Green 11	000 ⇄ 255	0–100%
84	Green fine 11	000 ⇄ 255	0–100%
85	Blue 11	000 ⇄ 255	0–100%
86	Blue fine 11	000 ⇄ 255	0–100%
87	White 11	000 ⇄ 255	0–100%
88	White fine 11	000 ⇄ 255	0–100%
89	Red 12	000 ⇄ 255	0–100%
90	Red fine 12	000 ⇄ 255	0–100%
91	Green 12	000 ⇄ 255	0–100%
92	Green fine 12	000 ⇄ 255	0–100%



# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
93	Blue 12	000 ⇔ 255	0–100%
94	Blue fine 12	000 ⇔ 255	0–100%
95	White 12	000 ⇔ 255	0–100%
96	White fine 12	000 ⇔ 255	0–100%
97	Red 13	000 ⇔ 255	0–100%
98	Red fine 13	000 ⇔ 255	0–100%
99	Green 13	000 ⇔ 255	0–100%
100	Green fine 13	000 ⇔ 255	0–100%
101	Blue 13	000 ⇔ 255	0–100%
102	Blue fine 13	000 ⇔ 255	0–100%
103	White 13	000 ⇔ 255	0–100%
104	White fine 13	000 ⇔ 255	0–100%
105	Red 14	000 ⇔ 255	0–100%
106	Red fine 14	000 ⇔ 255	0–100%
107	Green 14	000 ⇔ 255	0–100%
108	Green fine 14	000 ⇔ 255	0–100%
109	Blue 14	000 ⇔ 255	0–100%
110	Blue fine 14	000 ⇔ 255	0–100%
111	White 14	000 ⇔ 255	0–100%
112	White fine 14	000 ⇔ 255	0–100%
113	Red 15	000 ⇔ 255	0–100%
114	Red fine 15	000 ⇔ 255	0–100%
115	Green 15	000 ⇔ 255	0–100%
116	Green fine 15	000 ⇔ 255	0–100%
117	Blue 15	000 ⇔ 255	0–100%
118	Blue fine 15	000 ⇔ 255	0–100%
119	White 15	000 ⇔ 255	0–100%
120	White fine 15	000 ⇔ 255	0–100%
121	Red 16	000 ⇔ 255	0–100%
122	Red fine 16	000 ⇔ 255	0–100%
123	Green 16	000 ⇔ 255	0–100%
124	Green fine 16	000 ⇔ 255	0–100%
125	Blue 16	000 ⇔ 255	0–100%
126	Blue fine 16	000 ⇔ 255	0–100%
127	White 16	000 ⇔ 255	0–100%
128	White fine 16	000 ⇔ 255	0–100%
129	Red 17	000 ⇔ 255	0–100%
130	Red fine 17	000 ⇔ 255	0–100%
131	Green 17	000 ⇔ 255	0–100%
132	Green fine 17	000 ⇔ 255	0–100%
133	Blue 17	000 ⇔ 255	0–100%
134	Blue fine 17	000 ⇔ 255	0–100%
135	White 17	000 ⇔ 255	0–100%
136	White fine 17	000 ⇔ 255	0–100%
137	Red 18	000 ⇔ 255	0–100%
138	Red fine 18	000 ⇔ 255	0–100%
139	Green 18	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
140	Green fine 18	000 ⇄ 255	0–100%
141	Blue 18	000 ⇄ 255	0–100%
142	Blue fine 18	000 ⇄ 255	0–100%
143	White 18	000 ⇄ 255	0–100%
144	White fine 18	000 ⇄ 255	0–100%
145	Red 19	000 ⇄ 255	0–100%
146	Red fine 19	000 ⇄ 255	0–100%
147	Green 19	000 ⇄ 255	0–100%
148	Green fine 19	000 ⇄ 255	0–100%
149	Blue 19	000 ⇄ 255	0–100%
150	Blue fine 19	000 ⇄ 255	0–100%
151	White 19	000 ⇄ 255	0–100%
152	White fine 19	000 ⇄ 255	0–100%
153	Red 20	000 ⇄ 255	0–100%
154	Red fine 20	000 ⇄ 255	0–100%
155	Green 20	000 ⇄ 255	0–100%
156	Green fine 20	000 ⇄ 255	0–100%
157	Blue 20	000 ⇄ 255	0–100%
158	Blue fine 20	000 ⇄ 255	0–100%
159	White 20	000 ⇄ 255	0–100%
160	White fine 20	000 ⇄ 255	0–100%
161	Red 21	000 ⇄ 255	0–100%
162	Red fine 21	000 ⇄ 255	0–100%
163	Green 21	000 ⇄ 255	0–100%
164	Green fine 21	000 ⇄ 255	0–100%
165	Blue 21	000 ⇄ 255	0–100%
166	Blue fine 21	000 ⇄ 255	0–100%
167	White 21	000 ⇄ 255	0–100%
168	White fine 21	000 ⇄ 255	0–100%
169	Red 22	000 ⇄ 255	0–100%
170	Red fine 22	000 ⇄ 255	0–100%
171	Green 22	000 ⇄ 255	0–100%
172	Green fine 22	000 ⇄ 255	0–100%
173	Blue 22	000 ⇄ 255	0–100%
174	Blue fine 22	000 ⇄ 255	0–100%
175	White 22	000 ⇄ 255	0–100%
176	White fine 22	000 ⇄ 255	0–100%
177	Red 23	000 ⇄ 255	0–100%
178	Red fine 23	000 ⇄ 255	0–100%
179	Green 23	000 ⇄ 255	0–100%
180	Green fine 23	000 ⇄ 255	0–100%
181	Blue 23	000 ⇄ 255	0–100%
182	Blue fine 23	000 ⇄ 255	0–100%
183	White 23	000 ⇄ 255	0–100%
184	White fine 23	000 ⇄ 255	0–100%
185	Red 24	000 ⇄ 255	0–100%
186	Red fine 24	000 ⇄ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
187	Green 24	000 ⇔ 255	0–100%
188	Green fine 24	000 ⇔ 255	0–100%
189	Blue 24	000 ⇔ 255	0–100%
190	Blue fine 24	000 ⇔ 255	0–100%
191	White 24	000 ⇔ 255	0–100%
192	White fine 24	000 ⇔ 255	0–100%
193	Red 25	000 ⇔ 255	0–100%
194	Red fine 25	000 ⇔ 255	0–100%
195	Green 25	000 ⇔ 255	0–100%
196	Green fine 25	000 ⇔ 255	0–100%
197	Blue 25	000 ⇔ 255	0–100%
198	Blue fine 25	000 ⇔ 255	0–100%
199	White 25	000 ⇔ 255	0–100%
200	White fine 25	000 ⇔ 255	0–100%
201	Red 26	000 ⇔ 255	0–100%
202	Red fine 26	000 ⇔ 255	0–100%
203	Green 26	000 ⇔ 255	0–100%
204	Green fine 26	000 ⇔ 255	0–100%
205	Blue 26	000 ⇔ 255	0–100%
206	Blue fine 26	000 ⇔ 255	0–100%
207	White 26	000 ⇔ 255	0–100%
208	White fine 26	000 ⇔ 255	0–100%
209	Red 27	000 ⇔ 255	0–100%
210	Red fine 27	000 ⇔ 255	0–100%
211	Green 27	000 ⇔ 255	0–100%
212	Green fine 27	000 ⇔ 255	0–100%
213	Blue 27	000 ⇔ 255	0–100%
214	Blue fine 27	000 ⇔ 255	0–100%
215	White 27	000 ⇔ 255	0–100%
216	White fine 27	000 ⇔ 255	0–100%
217	Red 28	000 ⇔ 255	0–100%
218	Red fine 28	000 ⇔ 255	0–100%
219	Green 28	000 ⇔ 255	0–100%
220	Green fine 28	000 ⇔ 255	0–100%
221	Blue 28	000 ⇔ 255	0–100%
222	Blue fine 28	000 ⇔ 255	0–100%
223	White 28	000 ⇔ 255	0–100%
224	White fine 28	000 ⇔ 255	0–100%

### Standard (112 channels)

Channel	Function	Value	Percent/Setting
1	Red 1	000 ⇄ 255	0–100%
2	Green 1	000 ⇄ 255	0–100%
3	Blue 1	000 ⇄ 255	0–100%
4	White 1	000 ⇄ 255	0–100%
5	Red 2	000 ⇄ 255	0–100%
6	Green 2	000 ⇄ 255	0–100%
7	Blue 2	000 ⇄ 255	0–100%
8	White 2	000 ⇄ 255	0–100%
9	Red 3	000 ⇄ 255	0–100%
10	Green 3	000 ⇄ 255	0–100%
11	Blue 3	000 ⇄ 255	0–100%
12	White 3	000 ⇄ 255	0–100%
13	Red 4	000 ⇄ 255	0–100%
14	Green 4	000 ⇄ 255	0–100%
15	Blue 4	000 ⇄ 255	0–100%
16	White 4	000 ⇄ 255	0–100%
17	Red 5	000 ⇄ 255	0–100%
18	Green 5	000 ⇄ 255	0–100%
19	Blue 5	000 ⇄ 255	0–100%
20	White 5	000 ⇄ 255	0–100%
21	Red 6	000 ⇄ 255	0–100%
22	Green 6	000 ⇄ 255	0–100%
23	Blue 6	000 ⇄ 255	0–100%
24	White 6	000 ⇄ 255	0–100%
25	Red 7	000 ⇄ 255	0–100%
26	Green 7	000 ⇄ 255	0–100%
27	Blue 7	000 ⇄ 255	0–100%
28	White 7	000 ⇄ 255	0–100%
29	Red 8	000 ⇄ 255	0–100%
30	Green 8	000 ⇄ 255	0–100%
31	Blue 8	000 ⇄ 255	0–100%
32	White 8	000 ⇄ 255	0–100%
33	Red 9	000 ⇄ 255	0–100%
34	Green 9	000 ⇄ 255	0–100%
35	Blue 9	000 ⇄ 255	0–100%
36	White 9	000 ⇄ 255	0–100%
37	Red 10	000 ⇄ 255	0–100%
38	Green 10	000 ⇄ 255	0–100%
39	Blue 10	000 ⇄ 255	0–100%
40	White 10	000 ⇄ 255	0–100%
41	Red 11	000 ⇄ 255	0–100%
42	Green 11	000 ⇄ 255	0–100%
43	Blue 11	000 ⇄ 255	0–100%
44	White 11	000 ⇄ 255	0–100%
45	Red 12	000 ⇄ 255	0–100%
46	Green 12	000 ⇄ 255	0–100%

# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

Channel	Function	Value	Percent/Setting
47	Blue 12	000 ⇔ 255	0–100%
48	White 12	000 ⇔ 255	0–100%
49	Red 13	000 ⇔ 255	0–100%
50	Green 13	000 ⇔ 255	0–100%
51	Blue 13	000 ⇔ 255	0–100%
52	White 13	000 ⇔ 255	0–100%
53	Red 14	000 ⇔ 255	0–100%
54	Green 14	000 ⇔ 255	0–100%
55	Blue 14	000 ⇔ 255	0–100%
56	White 14	000 ⇔ 255	0–100%
57	Red 15	000 ⇔ 255	0–100%
58	Green 15	000 ⇔ 255	0–100%
59	Blue 15	000 ⇔ 255	0–100%
60	White 15	000 ⇔ 255	0–100%
61	Red 16	000 ⇔ 255	0–100%
62	Green 16	000 ⇔ 255	0–100%
63	Blue 16	000 ⇔ 255	0–100%
64	White 16	000 ⇔ 255	0–100%
65	Red 17	000 ⇔ 255	0–100%
66	Green 17	000 ⇔ 255	0–100%
67	Blue 17	000 ⇔ 255	0–100%
68	White 17	000 ⇔ 255	0–100%
69	Red 18	000 ⇔ 255	0–100%
70	Green 18	000 ⇔ 255	0–100%
71	Blue 18	000 ⇔ 255	0–100%
72	White 18	000 ⇔ 255	0–100%
73	Red 19	000 ⇔ 255	0–100%
74	Green 19	000 ⇔ 255	0–100%
75	Blue 19	000 ⇔ 255	0–100%
76	White 19	000 ⇔ 255	0–100%
77	Red 20	000 ⇔ 255	0–100%
78	Green 20	000 ⇔ 255	0–100%
79	Blue 20	000 ⇔ 255	0–100%
80	White 20	000 ⇔ 255	0–100%
81	Red 21	000 ⇔ 255	0–100%
82	Green 21	000 ⇔ 255	0–100%
83	Blue 21	000 ⇔ 255	0–100%
84	White 21	000 ⇔ 255	0–100%
85	Red 22	000 ⇔ 255	0–100%
86	Green 22	000 ⇔ 255	0–100%
87	Blue 22	000 ⇔ 255	0–100%
88	White 22	000 ⇔ 255	0–100%
89	Red 23	000 ⇔ 255	0–100%
90	Green 23	000 ⇔ 255	0–100%
91	Blue 23	000 ⇔ 255	0–100%
92	White 23	000 ⇔ 255	0–100%
93	Red 24	000 ⇔ 255	0–100%

Channel	Function	Value	Percent/Setting
94	Green 24	000 ⇔ 255	0–100%
95	Blue 24	000 ⇔ 255	0–100%
96	White 24	000 ⇔ 255	0–100%
97	Red 25	000 ⇔ 255	0–100%
98	Green 25	000 ⇔ 255	0–100%
99	Blue 25	000 ⇔ 255	0–100%
100	White 25	000 ⇔ 255	0–100%
101	Red 26	000 ⇔ 255	0–100%
102	Green 26	000 ⇔ 255	0–100%
103	Blue 26	000 ⇔ 255	0–100%
104	White 26	000 ⇔ 255	0–100%
105	Red 27	000 ⇔ 255	0–100%
106	Green 27	000 ⇔ 255	0–100%
107	Blue 27	000 ⇔ 255	0–100%
108	White 27	000 ⇔ 255	0–100%
109	Red 28	000 ⇔ 255	0–100%
110	Green 28	000 ⇔ 255	0–100%
111	Blue 28	000 ⇔ 255	0–100%
112	White 28	000 ⇔ 255	0–100%

## DMX CHART



### Maverick Storm 3 BeamWash- V1.230424

#### Basic (84 channels)

Channel	Function	Value	Percent/Setting
1	Red 1	000 ⇔ 255	0-100%
2	Green 1	000 ⇔ 255	0-100%
3	Blue 1	000 ⇔ 255	0-100%
4	Red 2	000 ⇔ 255	0-100%
5	Green 2	000 ⇔ 255	0-100%
6	Blue 2	000 ⇔ 255	0-100%
7	Red 3	000 ⇔ 255	0-100%
8	Green 3	000 ⇔ 255	0-100%
9	Blue 3	000 ⇔ 255	0-100%
10	Red 4	000 ⇔ 255	0-100%
11	Green 4	000 ⇔ 255	0-100%
12	Blue 4	000 ⇔ 255	0-100%
13	Red 5	000 ⇔ 255	0-100%
14	Green 5	000 ⇔ 255	0-100%
15	Blue 5	000 ⇔ 255	0-100%
16	Red 6	000 ⇔ 255	0-100%
17	Green 6	000 ⇔ 255	0-100%
18	Blue 6	000 ⇔ 255	0-100%
19	Red 7	000 ⇔ 255	0-100%
20	Green 7	000 ⇔ 255	0-100%
21	Blue 7	000 ⇔ 255	0-100%
22	Red 8	000 ⇔ 255	0-100%
23	Green 8	000 ⇔ 255	0-100%
24	Blue 8	000 ⇔ 255	0-100%
25	Red 9	000 ⇔ 255	0-100%
26	Green 9	000 ⇔ 255	0-100%
27	Blue 9	000 ⇔ 255	0-100%
28	Red 10	000 ⇔ 255	0-100%
29	Green 10	000 ⇔ 255	0-100%
30	Blue 10	000 ⇔ 255	0-100%
31	Red 11	000 ⇔ 255	0-100%
32	Green 11	000 ⇔ 255	0-100%
33	Blue 11	000 ⇔ 255	0-100%
34	Red 12	000 ⇔ 255	0-100%
35	Green 12	000 ⇔ 255	0-100%
36	Blue 12	000 ⇔ 255	0-100%
37	Red 13	000 ⇔ 255	0-100%
38	Green 13	000 ⇔ 255	0-100%
39	Blue 13	000 ⇔ 255	0-100%
40	Red 14	000 ⇔ 255	0-100%
41	Green 14	000 ⇔ 255	0-100%
42	Blue 14	000 ⇔ 255	0-100%
43	Red 15	000 ⇔ 255	0-100%
44	Green 15	000 ⇔ 255	0-100%
45	Blue 15	000 ⇔ 255	0-100%
46	Red 16	000 ⇔ 255	0-100%

Channel	Function	Value	Percent/Setting
47	Green 16	000 ⇄ 255	0–100%
48	Blue 16	000 ⇄ 255	0–100%
49	Red 17	000 ⇄ 255	0–100%
50	Green 17	000 ⇄ 255	0–100%
51	Blue 17	000 ⇄ 255	0–100%
52	Red 18	000 ⇄ 255	0–100%
53	Green 18	000 ⇄ 255	0–100%
54	Blue 18	000 ⇄ 255	0–100%
55	Red 19	000 ⇄ 255	0–100%
56	Green 19	000 ⇄ 255	0–100%
57	Blue 19	000 ⇄ 255	0–100%
58	Red 20	000 ⇄ 255	0–100%
59	Green 20	000 ⇄ 255	0–100%
60	Blue 20	000 ⇄ 255	0–100%
61	Red 21	000 ⇄ 255	0–100%
62	Green 21	000 ⇄ 255	0–100%
63	Blue 21	000 ⇄ 255	0–100%
64	Red 22	000 ⇄ 255	0–100%
65	Green 22	000 ⇄ 255	0–100%
66	Blue 22	000 ⇄ 255	0–100%
67	Red 23	000 ⇄ 255	0–100%
68	Green 23	000 ⇄ 255	0–100%
69	Blue 23	000 ⇄ 255	0–100%
70	Red 24	000 ⇄ 255	0–100%
71	Green 24	000 ⇄ 255	0–100%
72	Blue 24	000 ⇄ 255	0–100%
73	Red 25	000 ⇄ 255	0–100%
74	Green 25	000 ⇄ 255	0–100%
75	Blue 25	000 ⇄ 255	0–100%
76	Red 26	000 ⇄ 255	0–100%
77	Green 26	000 ⇄ 255	0–100%
78	Blue 26	000 ⇄ 255	0–100%
79	Red 27	000 ⇄ 255	0–100%
80	Green 27	000 ⇄ 255	0–100%
81	Blue 27	000 ⇄ 255	0–100%
82	Red 28	000 ⇄ 255	0–100%
83	Green 28	000 ⇄ 255	0–100%
84	Blue 28	000 ⇄ 255	0–100%



# DMX CHART



## Maverick Storm 3 BeamWash- V1.230424

### Color Chart

DMX Value	Function	Red Value	Green Value	Blue Value	White Value
000	No function	N/A	N/A	N/A	N/A
001 ⇔ 002	2700K	R: 255	G: 175	B: 0	W: 50
003 ⇔ 004	3200K	R: 243	G: 211	B: 0	W: 55
005 ⇔ 006	4000K	R: 177	G: 177	B: 0	W: 100
007 ⇔ 008	4200K	R: 251	G: 255	B: 8	W: 145
009 ⇔ 010	5600K	R: 109	G: 146	B: 0	W: 210
011 ⇔ 012	6500K	R: 106	G: 157	B: 12	W: 211
013 ⇔ 014	7500K	R: 66	G: 127	B: 11	W: 255
015	Blue	R: 0	G: 0	B: 255	W: 0
016 ⇔ 051	Blue to cyan	R: 0	G: +	B: 255	W: 0
052	Cyan	R: 0	G: 255	B: 255	W: 0
053 ⇔ 088	Cyan to green	R: 0	G: 255	B: -	W: 0
089	Green	R: 0	G: 255	B: 0	W: 0
090 ⇔ 125	Green to yellow	R: +	G: 255	B: 0	W: 0
126	Yellow	R: 255	G: 255	B: 0	W: 0
127 ⇔ 162	Yellow to red	R: 255	G: -	B: 0	W: 0
163	Red	R: 255	G: 0	B: 0	W: 0
164 ⇔ 200	Red to magenta	R: 255	G: 0	B: +	W: 0
201	Magenta	R: 255	G: 0	B: 255	W: 0
202 ⇔ 238	Magenta to blue	R: -	G: 0	B: 255	W: 0
239	Blue	R: 0	G: 0	B: 255	W: 0
240 ⇔ 247	Color fade, fast to slow	N/A	N/A	N/A	N/A
248 ⇔ 255	Color snap, fast to slow	N/A	N/A	N/A	N/A

### Strobe Chart

DMX Value	Function	DMX Value	Function
000 ⇔ 019	Off	145 ⇔ 149	On
020 ⇔ 024	On	150 ⇔ 164	Random 0–100% strobe, fast to slow
025 ⇔ 064	Strobe, fast to slow	165 ⇔ 169	On
065 ⇔ 069	On	170 ⇔ 184	Pulse strobe 1, fast to slow
070 ⇔ 084	100–0% strobe, fast to slow	185 ⇔ 189	On
085 ⇔ 089	On	190 ⇔ 204	Random pulse strobe, fast to slow
090 ⇔ 104	0–100% strobe, fast to slow	205 ⇔ 209	On
105 ⇔ 109	On	210 ⇔ 224	100–0–100% strobe, fast to slow
110 ⇔ 124	Random strobe, fast to slow	225 ⇔ 229	On
125 ⇔ 129	On	230 ⇔ 244	Pulse strobe 2, fast to slow
130 ⇔ 144	Random 100–0% strobe, fast to slow	245 ⇔ 255	On

### Control Chart

DMX Value	Function	DMX Value	Function
000 ⇔ 009	No function	115 ⇔ 119	Reserved for future use
010 ⇔ 014	Blackout on pan/tilt	120 ⇔ 124	Fan mode ECO
015 ⇔ 019	Reserved for future use	125 ⇔ 129	Fan mode full
020 ⇔ 024	RGBW color mixing	130 ⇔ 134	Fan mode auto
025 ⇔ 029	CMY color mixing	135 ⇔ 139	Dimmer mode fast
030 ⇔ 034	Combine main and ring	140 ⇔ 144	Dimmer mode smooth
035 ⇔ 039	Disable combine main and ring	145 ⇔ 149	Dimmer curve linear
040 ⇔ 044	Defrost fan on	150 ⇔ 154	Dimmer curve square
045 ⇔ 049	Defrost fan off	155 ⇔ 159	Dimmer curve inverse square
050 ⇔ 054	Reset pan	160 ⇔ 164	Dimmer curve S-curve
055 ⇔ 059	Reset tilt	165 ⇔ 169	WHITE mode
060 ⇔ 064	Zoom reset	170 ⇔ 174	FULL mode
065 ⇔ 066	Zoom reverse on	175 ⇔ 179	Single-color calibration off
067 ⇔ 069	Zoom reverse off	180 ⇔ 184	Single-color calibration on
070 ⇔ 074	Reset all	185 ⇔ 186	PWM 600 Hz
075 ⇔ 079	Reserved for future use	187 ⇔ 188	PWM 1200 Hz
080 ⇔ 084	Reverse pan/tilt	189 ⇔ 190	PWM 2000 Hz
085 ⇔ 089	Reverse pan	191 ⇔ 192	PWM 4000 Hz
090 ⇔ 094	Reverse tilt	193 ⇔ 194	PWM 6000 Hz
095 ⇔ 099	Disable reverse pan	195 ⇔ 196	PWM 15000 Hz
100 ⇔ 104	Disable reverse tilt	197 ⇔ 239	No function
105 ⇔ 109	Disable reverse pan/tilt	240 ⇔ 247	Calibration on
110 ⇔ 112	Preset color HTP on	248 ⇔ 255	Calibration off
113 ⇔ 114	Preset color HTP off		