

PHOTOMETRIC TEST REPORT



FIXTURE DATA

Manufacturer: Clay Paky s.r.l.
Fixture model: AROLLA AQUA WASH HC
Date: 2025-09-08

TABLE OF CONTENTS:

PHOTOMETRIC DATA WITH PC LENS:	3
➔ <i>FAN MODE: AUTO - ZOOM: MIN</i>	3
➔ <i>FAN MODE: AUTO - ZOOM: MAX</i>	4
➔ <i>FAN MODE: CONSTANT - ZOOM: MIN</i>	5
➔ <i>FAN MODE: CONSTANT - ZOOM: MAX</i>	6
➔ <i>FAN MODE: SILENT - ZOOM: MIN</i>	7
➔ <i>FAN MODE: SILENT - ZOOM: MAX</i>	8
➔ <i>FAN MODE: THEATRE - ZOOM: MIN</i>	9
➔ <i>FAN MODE: THEATRE - ZOOM: MAX</i>	10
➔ <i>TM-30: WHITE</i>	11
➔ <i>TLCI-2012: WHITE</i>	12
➔ <i>TM-30: CTO 100%</i>	13
➔ <i>TLCI-2012: CTO 100%</i>	14
PHOTOMETRIC DATA WITH FRESNEL LENS:	15
➔ <i>FAN MODE: AUTO - ZOOM: MIN</i>	15
➔ <i>FAN MODE: AUTO - ZOOM: MAX</i>	16
➔ <i>FAN MODE: CONSTANT - ZOOM: MIN</i>	17
➔ <i>FAN MODE: CONSTANT - ZOOM: MAX</i>	18
➔ <i>FAN MODE: SILENT - ZOOM: MIN</i>	19
➔ <i>FAN MODE: SILENT - ZOOM: MAX</i>	20
➔ <i>FAN MODE: THEATRE - ZOOM: MIN</i>	21
➔ <i>FAN MODE: THEATRE - ZOOM: MAX</i>	22
➔ <i>TM-30: WHITE</i>	23
➔ <i>TLCI-2012: WHITE</i>	24
➔ <i>TM-30: CTO 100%</i>	25
➔ <i>TLCI-2012: CTO 100%</i>	26


PHOTOMETRIC DATA WITH PC LENS:

FAN MODE: AUTO - ZOOM: MIN

Minimum Zoom - Auto Fan mode (9.1° 10% - 6.1° 50%)

Total Output: 22709 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	73180 (6799)	18295 (1700)	8131 (755)	4574 (425)
Cyan	15840 (1472)	3960 (368)	1760 (164)	990 (92)
Magenta	4387 (408)	1097 (102)	487 (45)	274 (25)
Yellow	43966 (4085)	10992 (1021)	4885 (454)	2748 (255)
CTO	25399 (2360)	6350 (590)	2822 (262)	1587 (147)

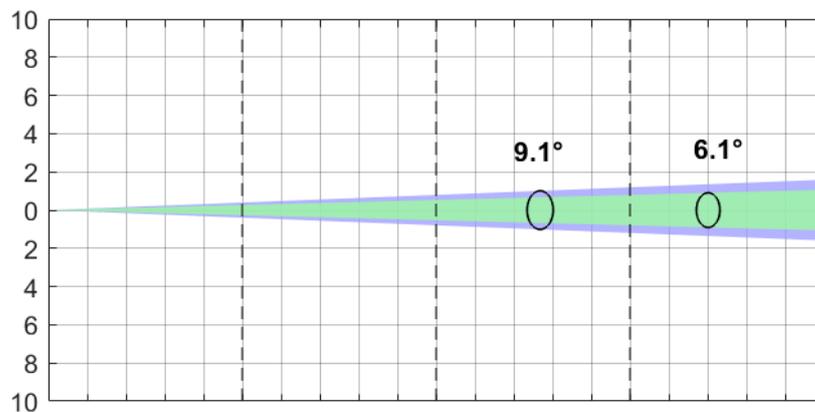

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	0.80 (2' 7")	1.60 (5' 3")	2.40 (7' 10")	3.20 (10' 6")
Diameter 50% m (ft in)		0	0.53 (1' 9")	1.06 (3' 6")	1.59 (5' 3")	2.12 (6' 11")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: AUTO - ZOOM: MAX

Maximum Zoom - Auto Fan mode (49° 10% - 39.5° 50%)

Total Output: 30138 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	2578 (240)	645 (60)	286 (27)	161 (15)
Cyan	498 (46)	125 (12)	55 (5)	31 (3)
Magenta	165 (15)	41 (4)	18 (2)	10 (1)
Yellow	1617 (150)	404 (38)	180 (17)	101 (9)
CTO	894 (83)	224 (21)	99 (9)	56 (5)

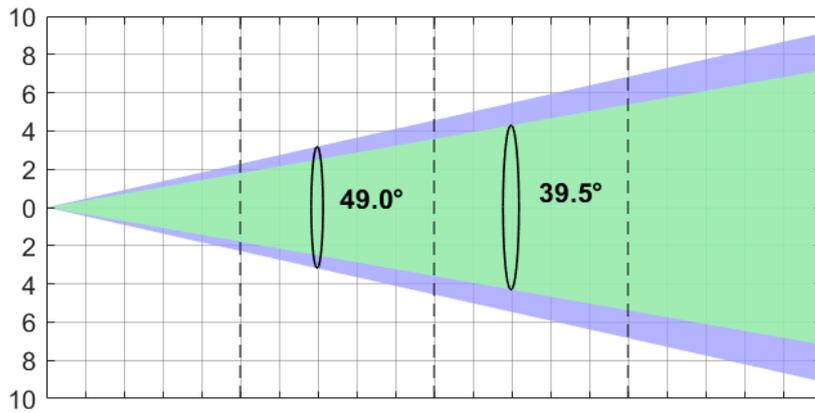

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	4.56 (14' 12")	9.12 (29' 11")	13.68 (44' 11")	18.24 (59' 10")
Diameter 50%	m (ft in)	0	3.59 (11' 9")	7.18 (23' 7")	10.77 (35' 4")	14.36 (47' 1")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: CONSTANT - ZOOM: MIN

Minimum Zoom - Constant Fan mode (9.1° 10% - 6.1° 50%)

Total Output: 22505 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	71409 (6634)	17852 (1659)	7934 (737)	4463 (415)
Cyan	15001 (1394)	3750 (348)	1667 (155)	938 (87)
Magenta	3959 (368)	990 (92)	440 (41)	247 (23)
Yellow	42036 (3905)	10509 (976)	4671 (434)	2627 (244)
CTO	25437 (2363)	6359 (591)	2826 (263)	1590 (148)

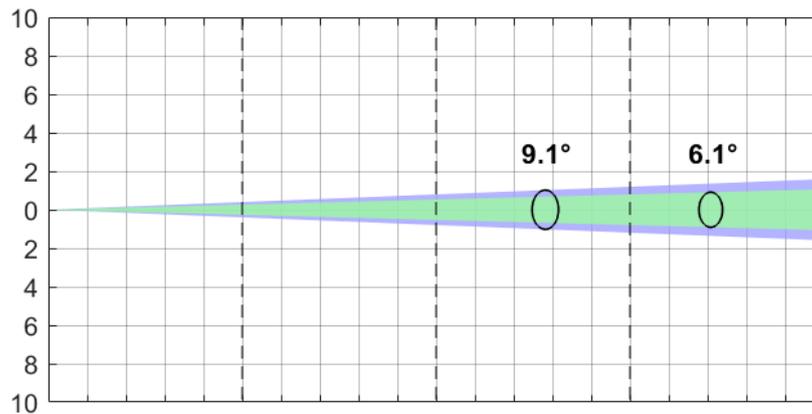

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.80 (2' 7")	1.60 (5' 3")	2.40 (7' 10")	3.20 (10' 6")
Diameter 50%	m (ft in)	0	0.53 (1' 9")	1.06 (3' 6")	1.59 (5' 3")	2.12 (6' 11")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: CONSTANT - ZOOM: MAX

Maximum Zoom - Constant Fan mode (49° 10% - 39.5° 50%)

Total Output: 31318 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	2677 (249)	669 (62)	297 (28)	167 (16)
Cyan	490 (46)	123 (11)	54 (5)	31 (3)
Magenta	167 (16)	42 (4)	19 (2)	10 (1)
Yellow	1620 (151)	405 (38)	180 (17)	101 (9)
CTO	898 (83)	225 (21)	100 (9)	56 (5)

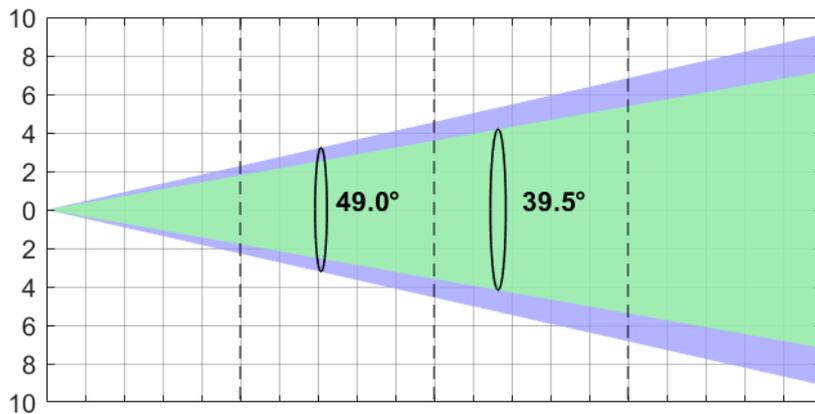

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	4.56 (14' 12")	9.12 (29' 11")	13.68 (44' 11")	18.24 (59' 10")
Diameter 50% m (ft in)		0	3.59 (11' 9")	7.18 (23' 7")	10.77 (35' 4")	14.36 (47' 1")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: SILENT - ZOOM: MIN

Minimum Zoom - Silent Fan mode (9.1° 10% - 6.1° 50%)

Total Output: 10808 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	35000 (3252)	8750 (813)	3889 (361)	2188 (203)
Cyan	9298 (864)	2325 (216)	1033 (96)	581 (54)
Magenta	2553 (237)	638 (59)	284 (26)	160 (15)
Yellow	25034 (2326)	6259 (581)	2782 (258)	1565 (145)
CTO	15118 (1404)	3780 (351)	1680 (156)	945 (88)

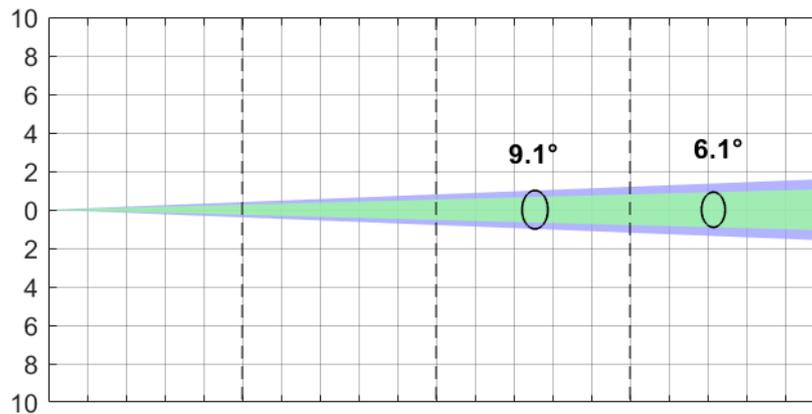

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.80 (2' 7")	1.60 (5' 3")	2.40 (7' 10")	3.20 (10' 6")
Diameter 50%	m (ft in)	0	0.53 (1' 9")	1.06 (3' 6")	1.59 (5' 3")	2.12 (6' 11")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: SILENT - ZOOM: MAX

Maximum Zoom - Silent Fan mode (49° 10% - 39.5° 50%)

Total Output: 15933 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	1368 (127)	342 (32)	152 (14)	86 (8)
Cyan	331 (31)	83 (8)	37 (3)	21 (2)
Magenta	99 (9)	25 (2)	11 (1)	6 (1)
Yellow	932 (87)	233 (22)	104 (10)	58 (5)
CTO	524 (49)	131 (12)	58 (5)	33 (3)

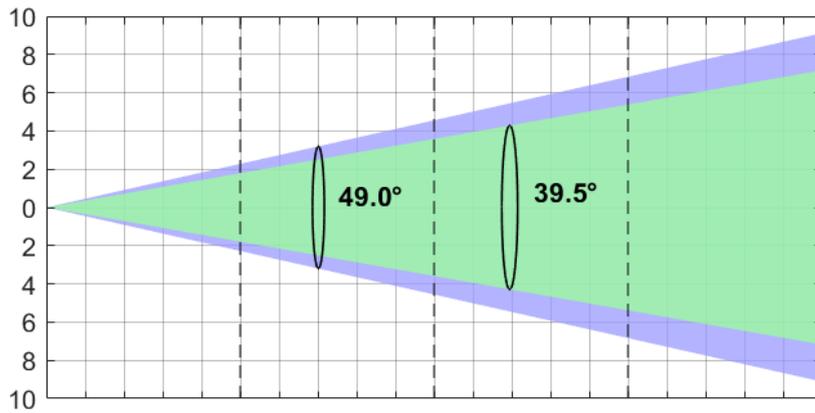

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	4.56 (14' 12")	9.12 (29' 11")	13.68 (44' 11")	18.24 (59' 10")
Diameter 50%	m (ft in)	0	3.59 (11' 9")	7.18 (23' 7")	10.77 (35' 4")	14.36 (47' 1")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: THEATRE - ZOOM: MIN

Minimum Zoom - Theatre Fan mode (9.1° 10% - 6.1° 50%)

Total Output: 13758 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	44815 (4163)	11204 (1041)	4979 (463)	2801 (260)
Cyan	9053 (841)	2263 (210)	1006 (93)	566 (53)
Magenta	2706 (251)	677 (63)	301 (28)	169 (16)
Yellow	25632 (2381)	6408 (595)	2848 (265)	1602 (149)
CTO	15838 (1471)	3960 (368)	1760 (163)	990 (92)

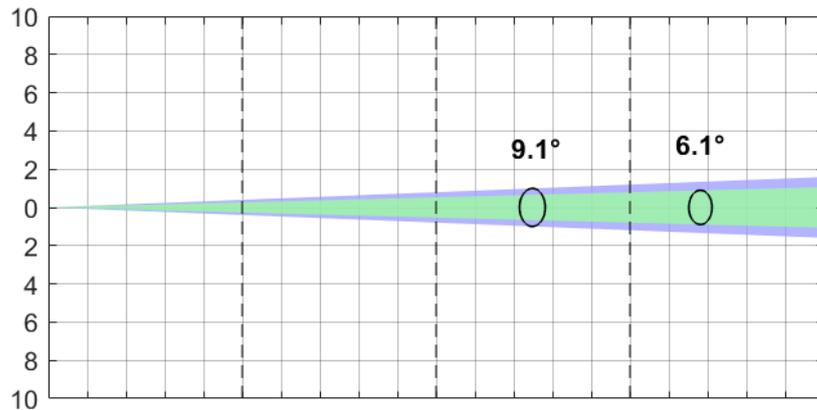

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.80 (2' 7")	1.60 (5' 3")	2.40 (7' 10")	3.20 (10' 6")
Diameter 50%	m (ft in)	0	0.53 (1' 9")	1.06 (3' 6")	1.59 (5' 3")	2.12 (6' 11")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: THEATRE - ZOOM: MAX

Maximum Zoom - Theatre Fan mode (49° 10% - 39.5° 50%)

Total Output: 16018 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	1369 (127)	342 (32)	152 (14)	86 (8)
Cyan	292 (27)	73 (7)	32 (3)	18 (2)
Magenta	98 (9)	25 (2)	11 (1)	6 (1)
Yellow	927 (86)	232 (22)	103 (10)	58 (5)
CTO	529 (49)	132 (12)	59 (5)	33 (3)

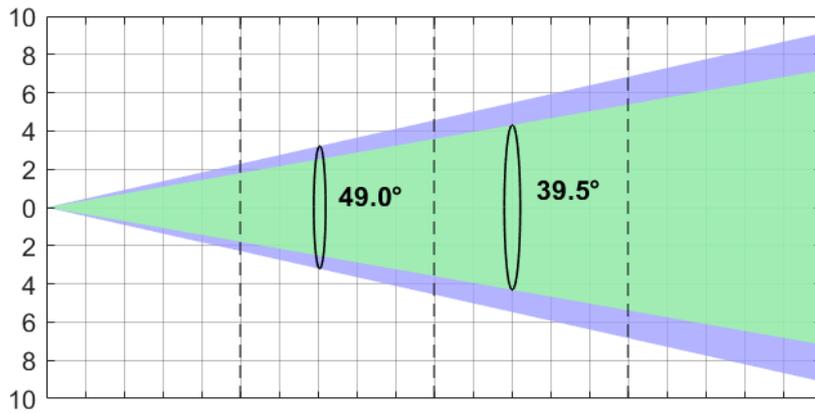

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	4.56 (14' 12")	9.12 (29' 11")	13.68 (44' 11")	18.24 (59' 10")
Diameter 50%	m (ft in)	0	3.59 (11' 9")	7.18 (23' 7")	10.77 (35' 4")	14.36 (47' 1")

*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

TM-30: WHITE







IES TM-30-18 Color Rendition Report

Source: AROLLA WASH AQUA HC

Manufacturer: CLAY PAKY

Date: 14.05.2025

Model: AROLLA WASH AQUA HC

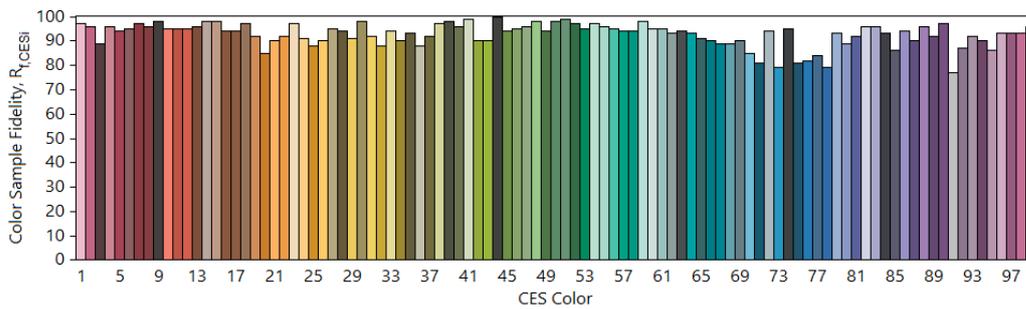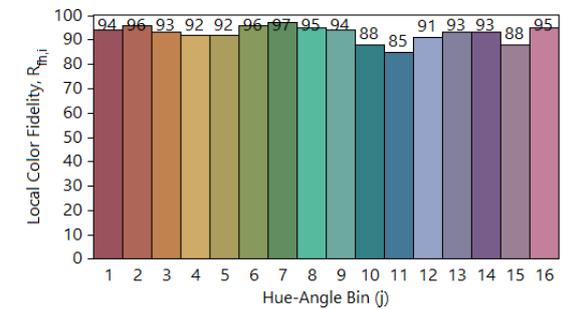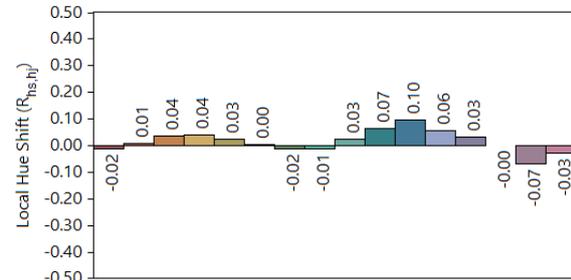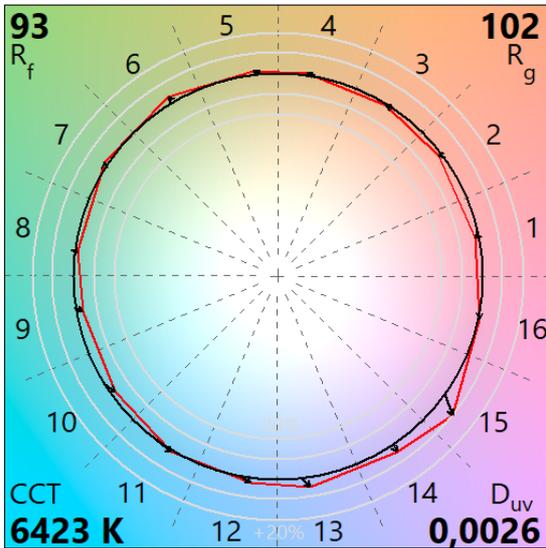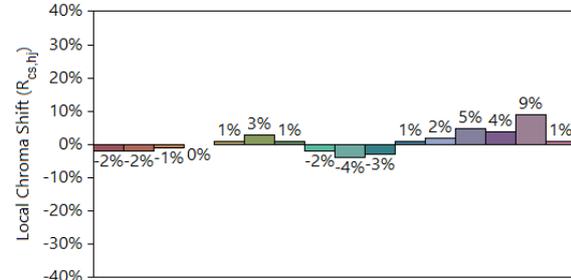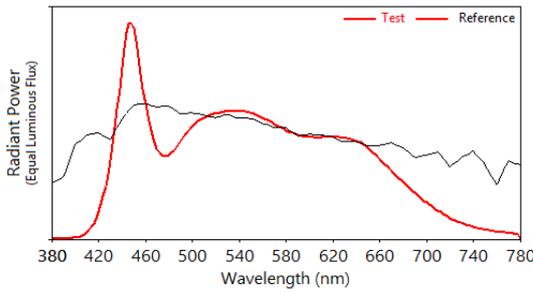

Notes: WHITE

x 0,3142
y 0,3293
u' 0,1988
v' 0,4687

CIE 13.3-1995
(CRI)
 R_a 94
 R_g 86

Colors are for visual orientation purposes only.


TLCI-2012: WHITE

Direct spectrum input : CCT = D6423 (-0.1)

TLCI-2012 : 98 (D6423)



Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	-
Y	0	0	0
Y/G	0	0	0
G	0	0	0
G/C	0	0	+
C	0	0	0
C/B	0	0	0
B	0	-	-
B/M	0	0	0
M	0	0	+
M/R	0	0	+

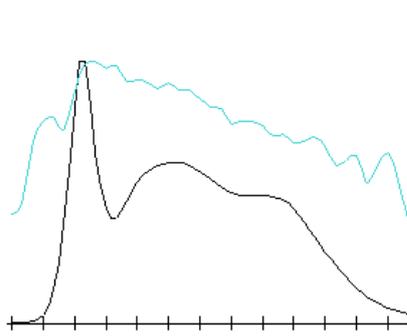

TM-30: CTO 100%







IES TM-30-18 Color Rendition Report

Source: AROLLA WASH AQUA HC

Manufacturer: CLAY PAKY

Date: 14.05.2025

Model: AROLLA WASH AQUA HC

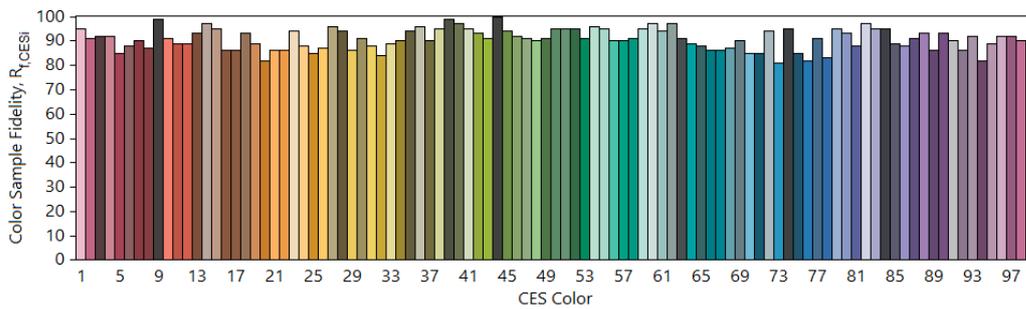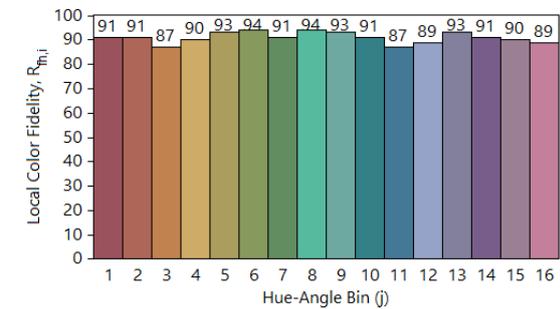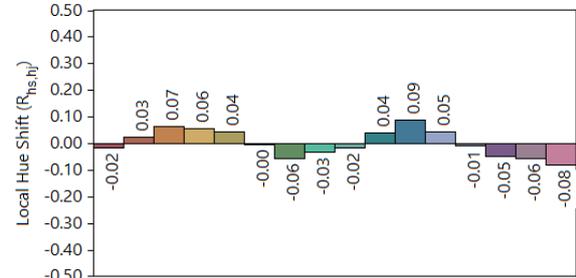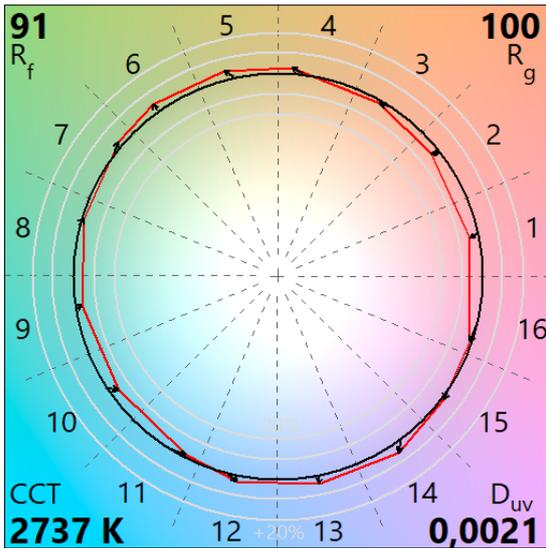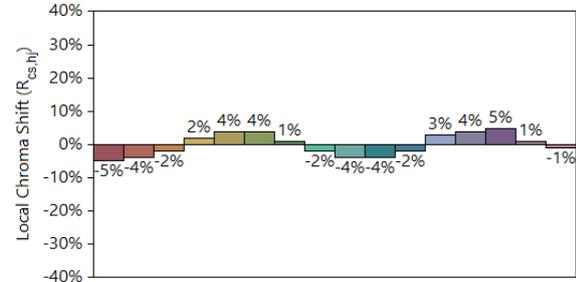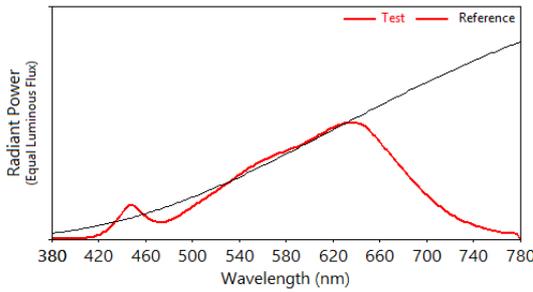

Notes: CTO 100%

x 0,4604
y 0,4164
u' 0,2603
v' 0,5296

CIE 13.3-1995
(CRI)
Ra 90
Rg 63

Colors are for visual orientation purposes only.


TLCI-2012: CTO 100%

Direct spectrum input : CCT = P2737 (+0.4)

TLCI-2012 : 91 (P2737)



Sector	Lightness	Chroma	Hue
R	+	0	0
R/Y	0	0	--
Y	0	0	-
Y/G	0	0	0
G	0	0	0
G/C	0	0	+
C	0	0	+
C/B	+	0	-
B	0	-	-
B/M	+	-	+
M	+	0	+++
M/R	+	0	++

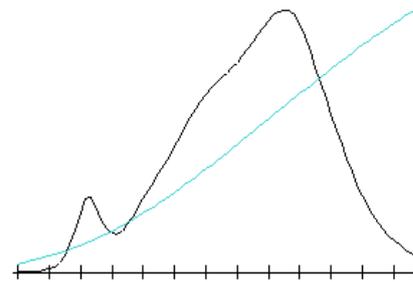


PHOTOMETRIC DATA WITH FRESNEL LENS:

FAN MODE: AUTO - ZOOM: MIN

Minimum Zoom - Auto Fan mode (11.6° 10% - 6.4° 50%)

Total Output: 18701 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	43873 (4076)	10968 (1019)	4875 (453)	2742 (255)
Cyan	8126 (755)	2032 (189)	903 (84)	508 (47)
Magenta	2749 (255)	687 (64)	305 (28)	172 (16)
Yellow	27077 (2516)	6769 (629)	3009 (280)	1692 (157)
CTO	13925 (1294)	3481 (323)	1547 (144)	870 (81)

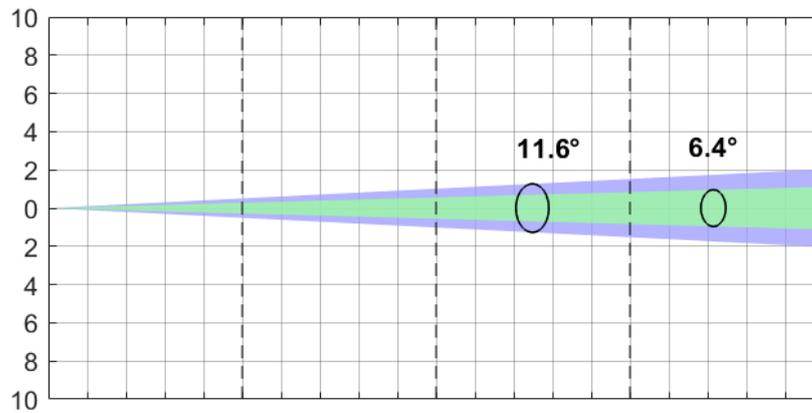

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	1.02 (3' 4")	2.04 (6' 8")	3.06 (10' 0")	4.08 (13' 5")
Diameter 50% m (ft in)		0	0.56 (1' 10")	1.12 (3' 8")	1.68 (5' 6")	2.24 (7' 4")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: AUTO - ZOOM: MAX

Maximum Zoom - Auto Fan mode (58.1° 10% - 46° 50%)

Total Output: 26642 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	1572 (146)	393 (37)	175 (16)	98 (9)
Cyan	298 (28)	75 (7)	33 (3)	19 (2)
Magenta	110 (10)	28 (3)	12 (1)	7 (1)
Yellow	1017 (94)	254 (24)	113 (10)	64 (6)
CTO	537 (50)	134 (12)	60 (6)	34 (3)

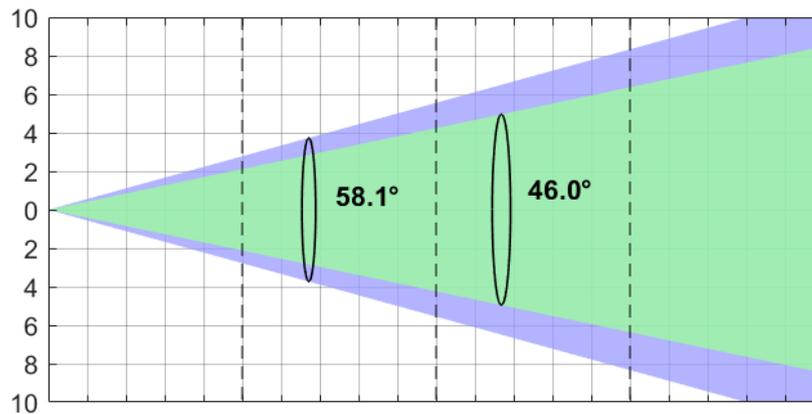

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	5.55 (18' 3")	11.10 (36' 5")	16.65 (54' 8")	22.20 (72' 10")
Diameter 50%	m (ft in)	0	4.24 (13' 11")	8.48 (27' 10")	12.72 (41' 9")	16.96 (55' 8")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: CONSTANT - ZOOM: MIN

Minimum Zoom - Constant Fan mode (11.6° 10% - 6.4° 50%)

Total Output: 17940 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	41414 (3847)	10354 (962)	4602 (427)	2588 (240)
Cyan	7565 (703)	1891 (176)	841 (78)	473 (44)
Magenta	2690 (250)	673 (62)	299 (28)	168 (16)
Yellow	25310 (2351)	6328 (588)	2812 (261)	1582 (147)
CTO	14336 (1332)	3584 (333)	1593 (148)	896 (83)

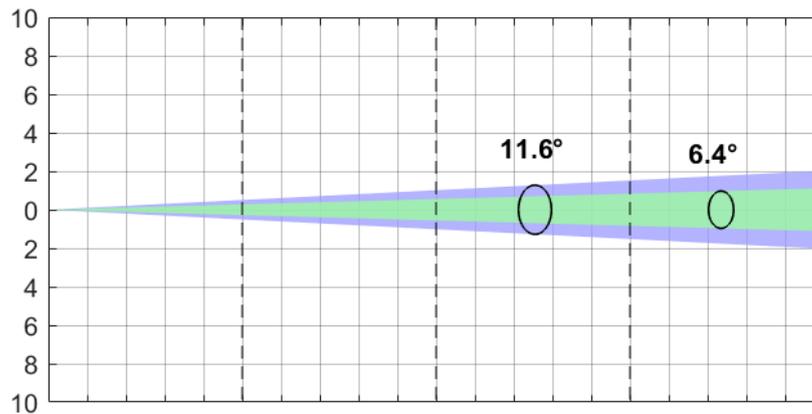

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	1.02 (3' 4")	2.04 (6' 8")	3.06 (10' 0")	4.08 (13' 5")
Diameter 50% m (ft in)		0	0.56 (1' 10")	1.12 (3' 8")	1.68 (5' 6")	2.24 (7' 4")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: CONSTANT - ZOOM: MAX

Maximum Zoom - Constant Fan mode (58.1° 10% - 46° 50%)

Total Output: 27368 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	1611 (150)	403 (37)	179 (17)	101 (9)
Cyan	303 (28)	76 (7)	34 (3)	19 (2)
Magenta	107 (10)	27 (2)	12 (1)	7 (1)
Yellow	1009 (94)	252 (23)	112 (10)	63 (6)
CTO	536 (50)	134 (12)	60 (6)	34 (3)

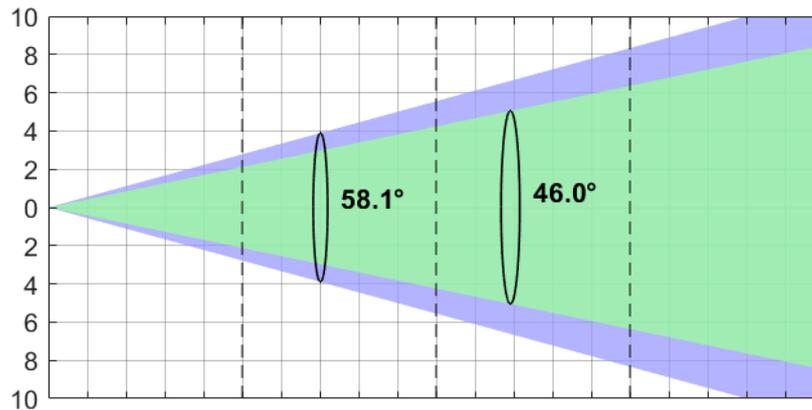

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	5.55 (18' 3")	11.10 (36' 5")	16.65 (54' 8")	22.20 (72' 10")
Diameter 50%	m (ft in)	0	4.24 (13' 11")	8.48 (27' 10")	12.72 (41' 9")	16.96 (55' 8")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: SILENT - ZOOM: MIN

Minimum Zoom - Silent Fan mode (11.6° 10% - 6.4° 50%)

Total Output: 9420 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	22711 (2110)	5678 (527)	2523 (234)	1419 (132)
Cyan	4804 (446)	1201 (112)	534 (50)	300 (28)
Magenta	1651 (153)	413 (38)	183 (17)	103 (10)
Yellow	15727 (1461)	3932 (365)	1747 (162)	983 (91)
CTO	8219 (764)	2055 (191)	913 (85)	514 (48)

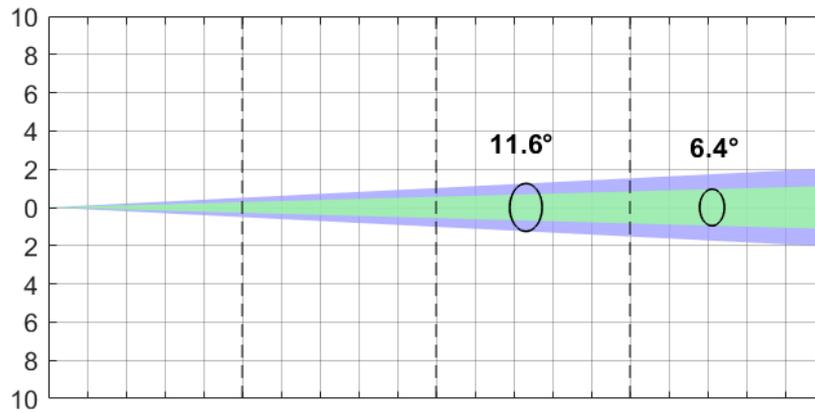

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	1.02 (3' 4")	2.04 (6' 8")	3.06 (10' 0")	4.08 (13' 5")
Diameter 50%	m (ft in)	0	0.56 (1' 10")	1.12 (3' 8")	1.68 (5' 6")	2.24 (7' 4")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: SILENT - ZOOM: MAX

Maximum Zoom - Silent Fan mode (58.1° 10% - 46° 50%)

Total Output: 13937 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	824 (77)	206 (19)	92 (9)	52 (5)
Cyan	173 (16)	43 (4)	19 (2)	11 (1)
Magenta	60 (6)	15 (1)	7 (1)	4 (0)
Yellow	581 (54)	145 (13)	65 (6)	36 (3)
CTO	295 (27)	74 (7)	33 (3)	18 (2)

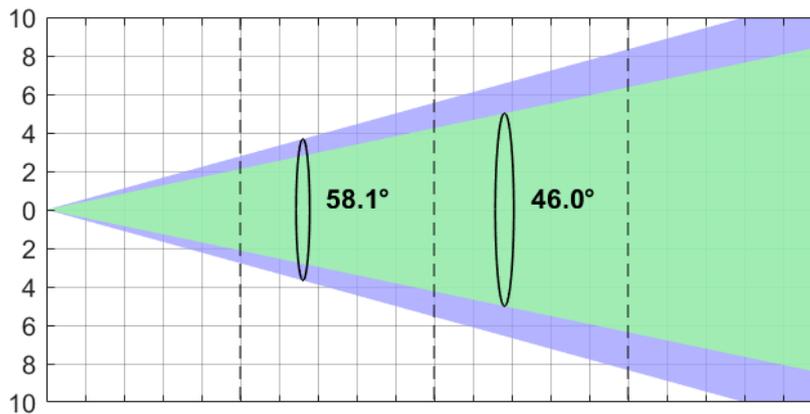

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	5.55 (18' 3")	11.10 (36' 5")	16.65 (54' 8")	22.20 (72' 10")
Diameter 50% m (ft in)		0	4.24 (13' 11")	8.48 (27' 10")	12.72 (41' 9")	16.96 (55' 8")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: THEATRE - ZOOM: MIN

Minimum Zoom - Theatre Fan mode (11.6° 10% - 6.4° 50%)

Total Output: 9494 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	22568 (2097)	5642 (524)	2508 (233)	1411 (131)
Cyan	4787 (445)	1197 (111)	532 (49)	299 (28)
Magenta	1609 (149)	402 (37)	179 (17)	101 (9)
Yellow	16056 (1492)	4014 (373)	1784 (166)	1004 (93)
CTO	8600 (799)	2150 (200)	956 (89)	538 (50)

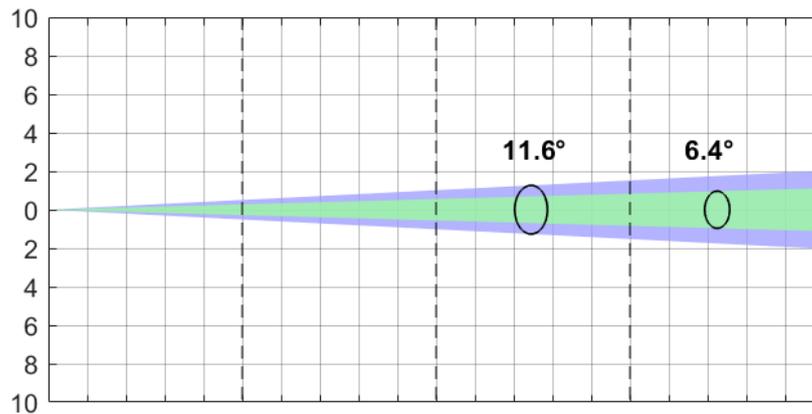

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10% m (ft in)		0	1.02 (3' 4")	2.04 (6' 8")	3.06 (10' 0")	4.08 (13' 5")
Diameter 50% m (ft in)		0	0.56 (1' 10")	1.12 (3' 8")	1.68 (5' 6")	2.24 (7' 4")


*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

FAN MODE: THEATRE - ZOOM: MAX

Maximum Zoom - Theatre Fan mode (58.1° 10% - 46° 50%)

Total Output: 12474 lumens

	Lux (fc)	Lux (fc)	Lux (fc)	Lux (fc)
White	803 (75)	201 (19)	89 (8)	50 (5)
Cyan	167 (16)	42 (4)	19 (2)	10 (1)
Magenta	58 (5)	15 (1)	6 (1)	4 (0)
Yellow	567 (53)	142 (13)	63 (6)	35 (3)
CTO	293 (27)	73 (7)	33 (3)	18 (2)

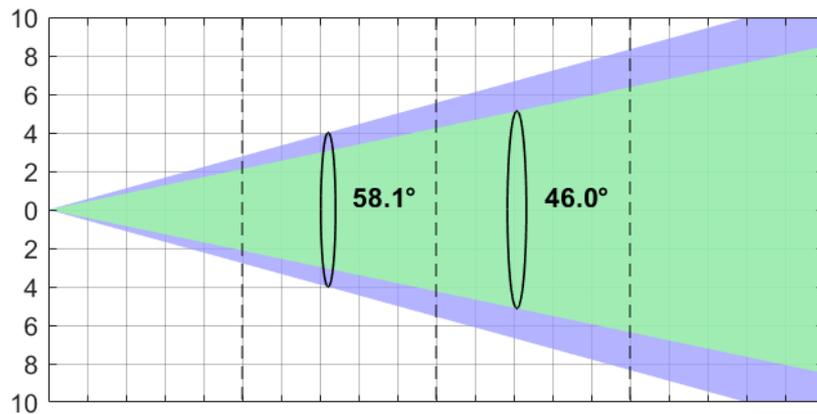







Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	5.55 (18' 3")	11.10 (36' 5")	16.65 (54' 8")	22.20 (72' 10")
Diameter 50%	m (ft in)	0	4.24 (13' 11")	8.48 (27' 10")	12.72 (41' 9")	16.96 (55' 8")

*Lumen values detected with integrating sphere. Measurements taken 15 minutes after the fixture was turned on.

TM-30: WHITE

IES TM-30-18 Color Rendition Report

Source: AROLLA AQUA HC with FRESNEL Manufacturer: CLAY PAKY
 Date: 28.08.2025 Model: AROLLA AQUA HC with FRESNEL

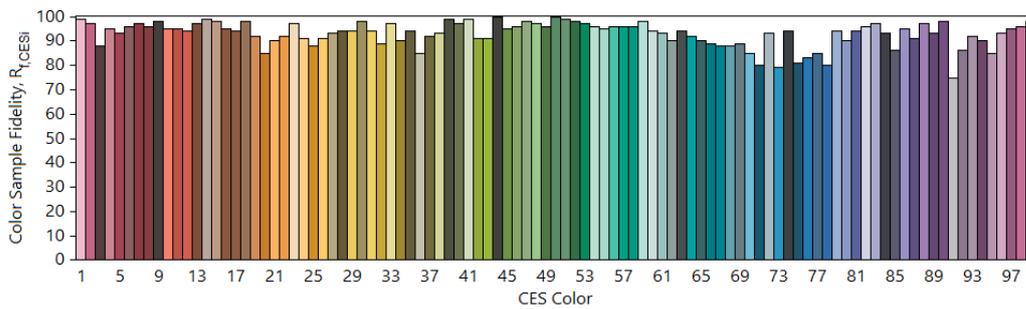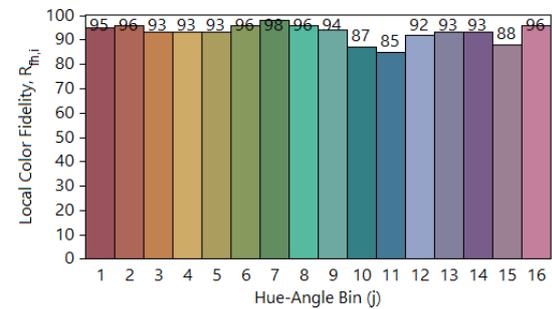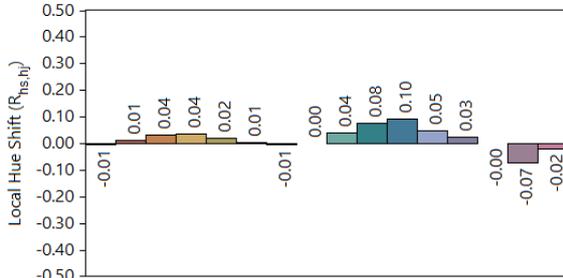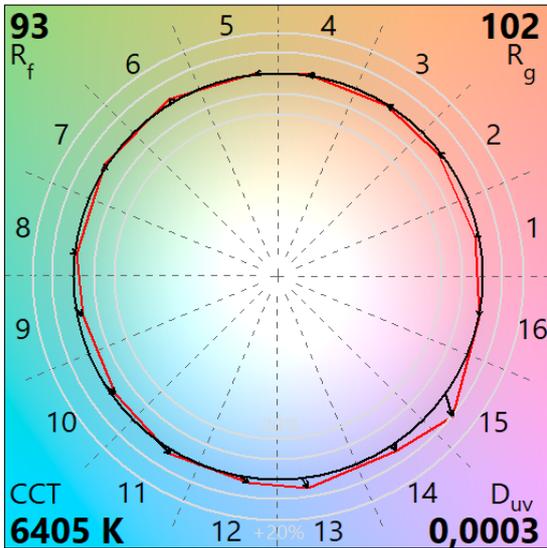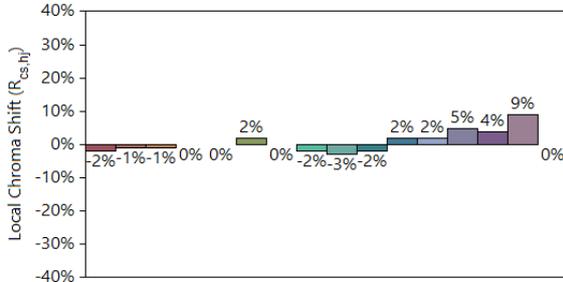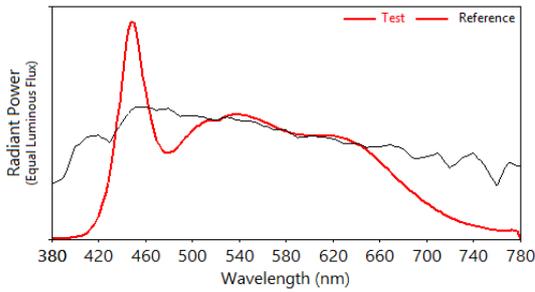

Notes: White

x 0,3150
 y 0,3256
 u' 0,2007
 v' 0,4668

CIE 13.3-1995
 (CRI)
 R_a 95
 R_g 90

Colors are for visual orientation purposes only.


TLCI-2012: WHITE

Direct spectrum input : CCT = D6405 (-0.5)

TLCI-2012 : 98 (D6405)



Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	-
Y	0	0	0
Y/G	0	0	0
G	0	0	0
G/C	0	0	+
C	0	0	0
C/B	0	0	-
B	0	-	-
B/M	0	0	0
M	0	0	+
M/R	0	0	+

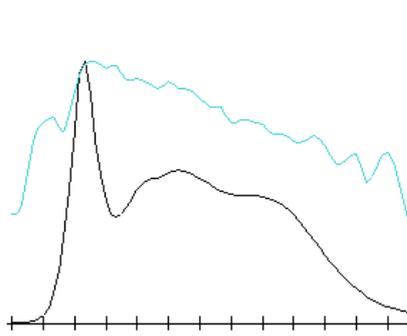

TM-30: CTO 100%







IES TM-30-18 Color Rendition Report

Source: AROLLA WASH AQUA HC

Manufacturer: CLAY PAKY

Date: 14.05.2025

Model: AROLLA WASH AQUA HC

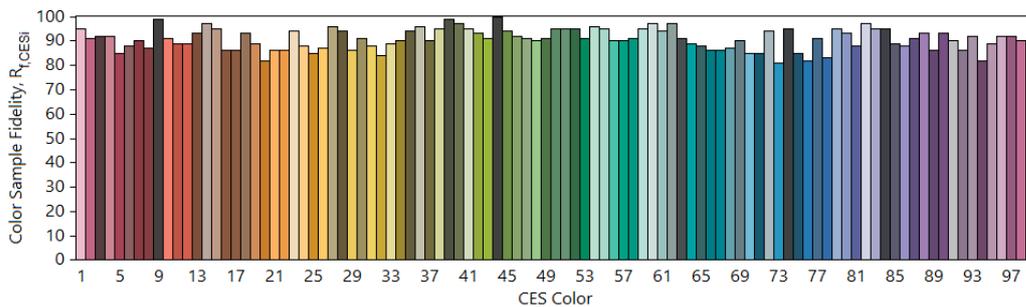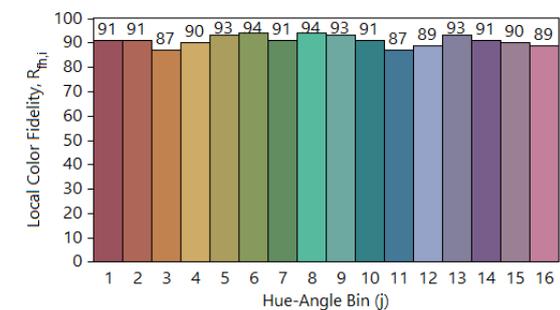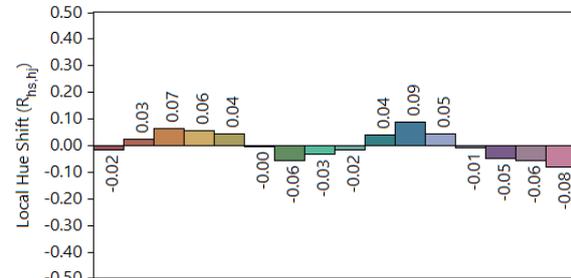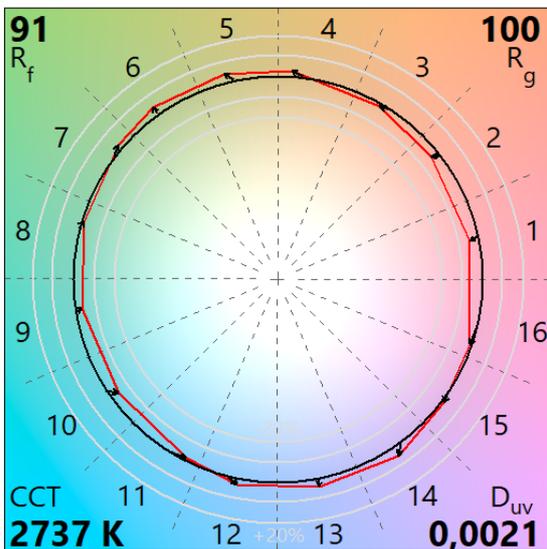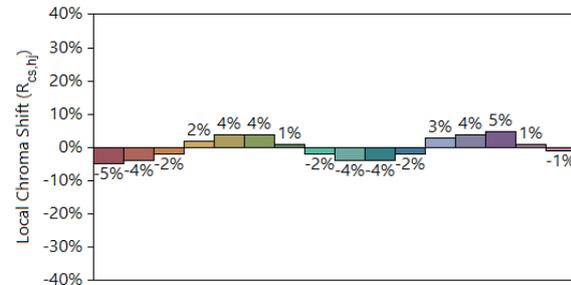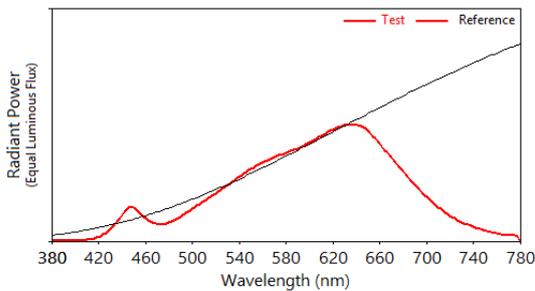

Notes: CTO 100%

x 0,4604
y 0,4164
u' 0,2603
v' 0,5296

CIE 13.3-1995
(CRI)
R_a 90
R_g 63

Colors are for visual orientation purposes only.

TLCI-2012: CTO 100%

Direct spectrum input : CCT = P2737 (+0.4)

TLCI-2012 : 91 (P2737)



Sector	Lightness	Chroma	Hue
R	+	0	0
R/Y	0	0	--
Y	0	0	-
Y/G	0	0	0
G	0	0	0
G/C	0	0	+
C	0	0	+
C/B	+	0	-
B	0	-	-
B/M	+	-	+
M	+	0	+++
M/R	+	0	++

