

AXCOR WASH 300

I DIAGRAMMI FOTOMETRICI

D FOTOMETRICHE DIAGRAMME

GB PHOTOMETRIC DIAGRAMS

E DIAGRAMAS FOTOMÉTRICOS

F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.


Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom (5.5° 10% - 4.0° 50%)


Total Output: 5500 lumens

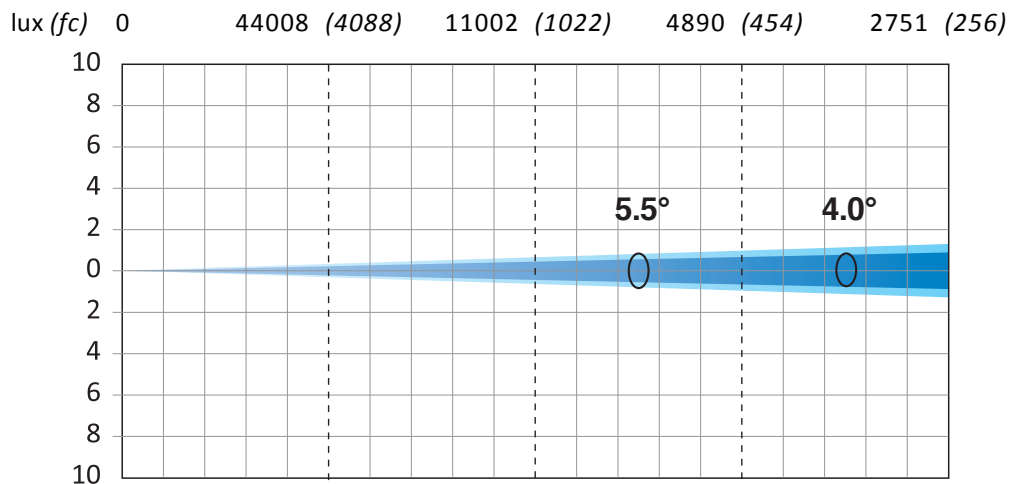

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.48 (1' 7")	0.96 (3' 2")	1.44 (4' 9")	1.92 (6' 4")
Diameter 50%	m (ft in)	0	0.35 (1' 2")	0.70 (2' 3")	1.05 (3' 5")	1.40 (4' 7")

Maximum Zoom (42.0° 10% - 25.0° 50%)

Total Output: 5900 lumens

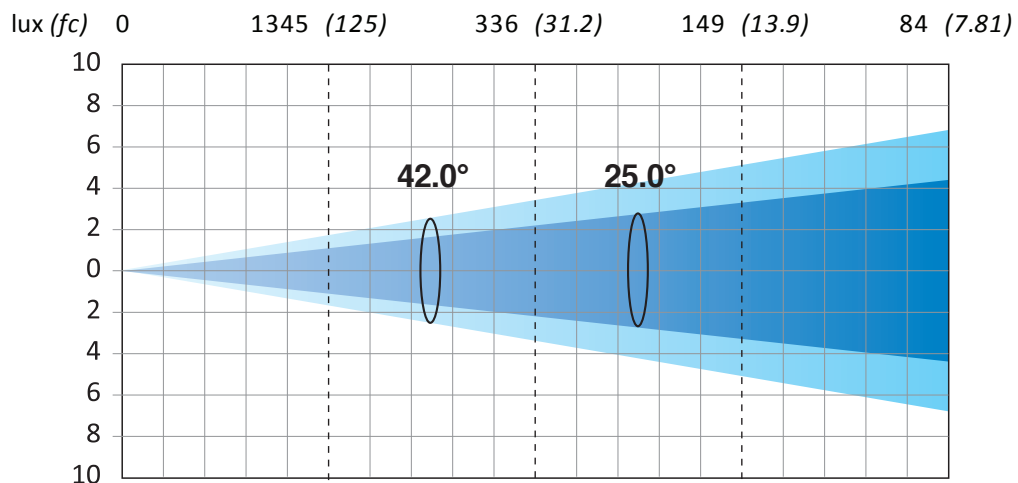

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	3.84 (12' 7")	7.68 (25' 2")	11.52 (37' 9")	15.35 (50' 5")
Diameter 50%	m (ft in)	0	2.22 (7' 3")	4.43 (14' 7")	6.65 (21' 10")	8.87 (29' 1")

AXCOR WASH 300

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMAS FOTOMÉTRICOS

