

## Overview

Smart modules add additional functionality and connectivity to select CueServer 3 models by plugging them into an available module slot.

Use the **SM-RS232** module to interface to devices that require RS-232 serial communications. These may include video projectors, window covering motors, automation systems, media servers and more.

Each **SM-RS232** module adds a single communication link using the RS-232 serial standard.

The **SM-RS232** is provided with a 3-position 5.08mm pluggable terminal block for easy field wiring. The terminals include Tx (transmit data), Rx (receive data), and COM (common).

Additionally, an LED indicator on the module provides at-a-glance operational status.

## Features


- Provides industry standard RS-232 port
- Can be configured in software for many common baud rates from 300bps to 250,000bps
- Serial ports can be configured in software to communicate in various protocols including CueScript, CueStation Hub, JavaScript plugins, or customer-defined messages
- Up to 8 SM-RS232 modules can be added to the CS-3900 CueServer 3 Pro
- Built-in status indicator LED

## Ordering

**SM-RS232**


**RS-232 Serial Smart Module**

*Includes 3-position pluggable terminal block*

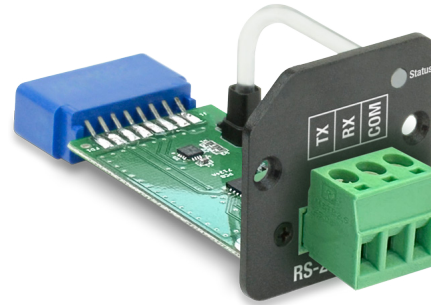

SM-RS232  
RS-232 Serial Smart Module

## Typical Customer Wiring

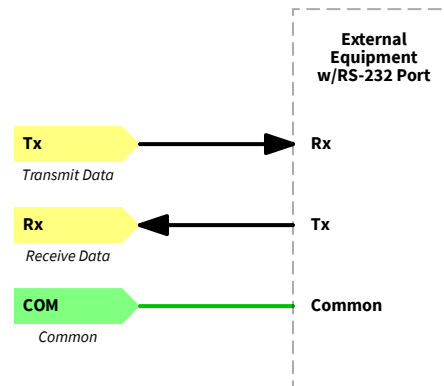

**Note:** Be sure to connect the **Tx** pin of the SM-RS232 to the **Rx** pin of the external equipment, and vice-versa.

Specifications subject to change without notice. Interactive Technologies is not responsible for errors or omissions. All trademarks are the property of their respective owners. Copyright © 2022-23, Interactive Technologies, Inc. All rights reserved worldwide. D0532A 3/16/2023

**Interactive Technologies, Inc.**

5295 Lake Pointe Center Drive  
Cumming, GA 30041 USA  
1-678-455-9019  
interactive-online.com

**Catalog #:**

**Project:**

**Prepared by:**

**Date:**