

### Overview

Smart modules add additional functionality and connectivity to select CueServer 3 models by plugging them into an available module slot.

Use the **SM-MIDI** module to interface to MIDI compatible devices. These may include show automation systems, audio playback devices, instruments, laser projectors, etc.

Each **SM-MIDI** module comes with a pigtail wire that plugs into the module to provide two 5-pin female DIN connectors, one for MIDI Input and one for MIDI Output.

The **SM-MIDI** module allows CueServer to receive and send a variety of MIDI messages to/from other devices such as Note On/Off, Program Change, System Exclusive, MIDI Timecode and more.

Additionally, an LED indicator on the module provides at-a-glance operational status.



SM-MIDI  
MIDI Smart Module  
w/5-pin DIN Pigtail Cable

### Features

- Provides industry standard 5-pin DIN MIDI interface
- Includes both MIDI Input and MIDI Output from a single module
- Supports a wide variety of MIDI messages, such as Note On/Off, Program Change, System Exclusive, MIDI Timecode, and more
- Opto-Isolated
- Built-in status indicator LED


### Ordering

**SM-MIDI**      **MIDI Smart Module**  
*Includes 18" 5-pin DIN MIDI Pigtail Cable*

### Specifications

Module Power Requirements	
All operating modes	0.2 W

### Typical Customer Wiring

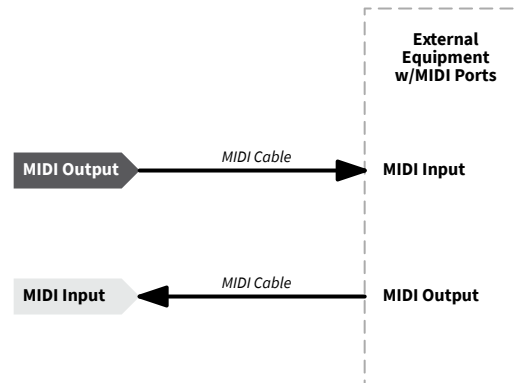

Specifications subject to change without notice. Interactive Technologies is not responsible for errors or omissions. All trademarks are the property of their respective owners. Copyright © 2022-23, Interactive Technologies, Inc. All rights reserved worldwide. D0537A 11/17/2023

#### Interactive Technologies, Inc.

5295 Lake Pointe Center Drive  
Cumming, GA 30041 USA  
1-678-455-9019  
interactive-online.com

#### Catalog #:

#### Prepared by:

#### Project:

#### Date: