



Datasheet

Titan PowerBox




Essential accessory for Titan Tubes. Use it to charge or install up to 10 Titan Tube or Helios Tube for longer operation. Also allows wired data transfer from DMX, Artnet and sACN sources. Comes with PowerCon AC cable and 8 short DC charging cables. Longer Power/Data Combination cables sold separately.

SPECIFICATIONS

	Titan PowerBox
Order Code	FP1-PWB
AC Input	100-240 VAC, 50/60 Hertz, 4.4 A / 115 VAC, 3 A / 230 VAC
AC Connector	PowerCON TRUE1 IN/OUT
DC Output	10 x 2 A / 24 VDC
DC Connector	10 x DC Barrel (5.5 mm / 2.1 mm)
Data Input	XLR-DMX, ART-Net (1 Universe), sACN (1 Universe)
Data Output	DMX via 10 x DC sockets - DMX via 5-pin XLR
Data Sockets	5-pin XLR IN/OUT, RJ45 input
Housing Material	Metal
IP Rating	IP20
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F
Weight	3.8 kg / 8.37 lbs
Dimensions (L x W x D)	321 mm x 125 mm x 90.7 mm / 12.63" x 4.92" x 3.57"
Mounting Options	3/8" - 16 UNC thread / 1/2" hole

DRAWINGS

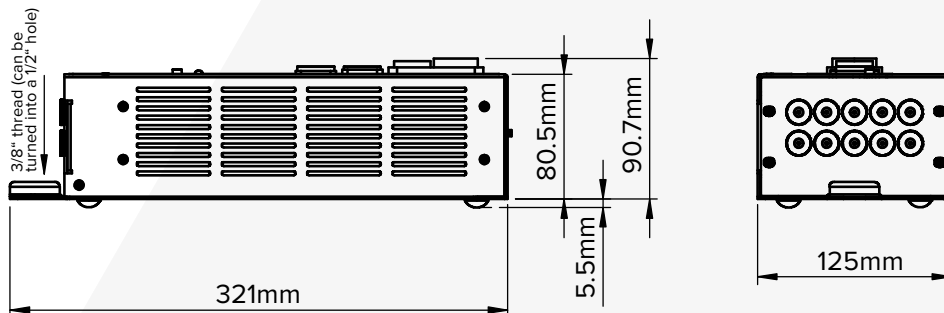

USE CASE

PowerBox in the set



ACCESSORIES

Titan Power/Data Combination Cable 5/10/15 m

FP1-PWB-CAB-5/10/15




Included in the Kit

1x Titan PowerBox (FP1-PWB)

1x PowerCON TRUE1 cable (TRUE1)

8x Set of 8 DC Charging Cables (FP1-CHRCSE-SCS)

CHARGING & CONNECTING

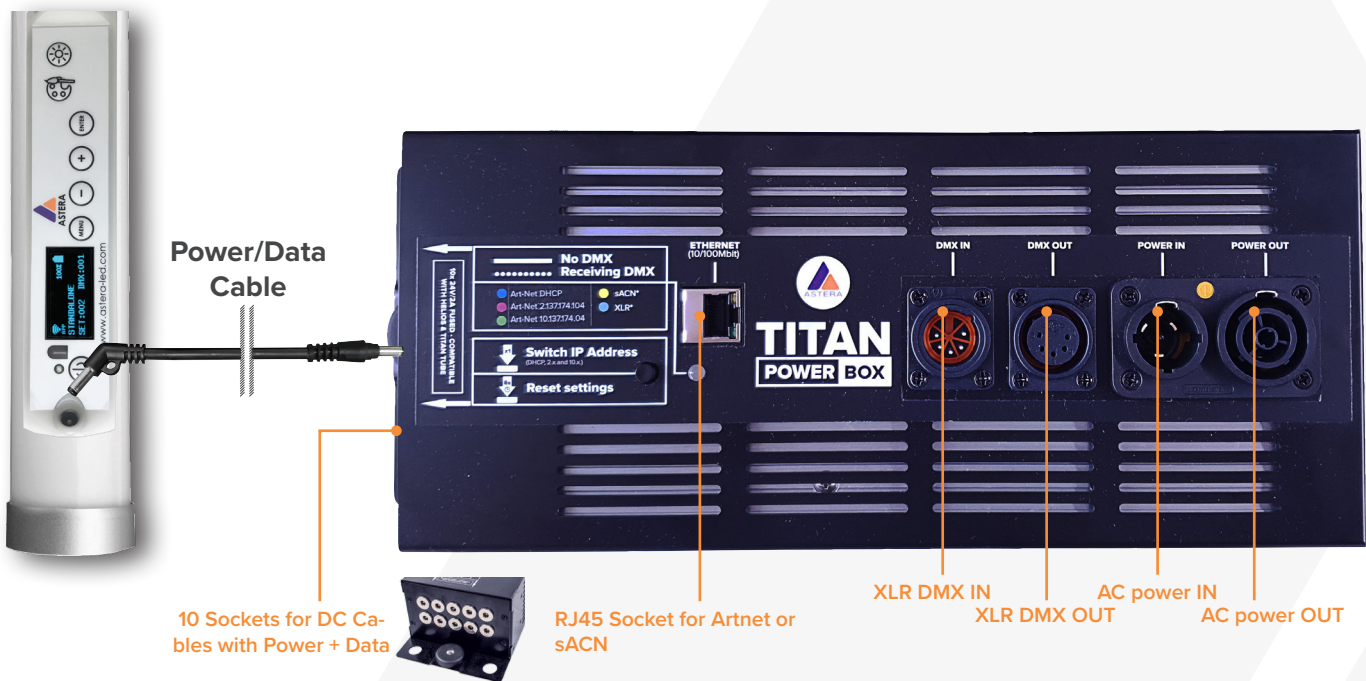

CONNECTING MULTIPLE DMX UNIVERSES TO 1 POWERBOX

