





# HSP Essential Omni

**Quick Guide** | Kurzanleitung | Guide rapide | Guida rapida | Guía de inicio rápido | Guia rápido | Beknopte handleiding | Krótka instrukcja obsługi | Snabbguide | Kort vejledning | Pikaohje | Γρήγορος οδηγός | Kısa Kılavuz | Краткая инструкция | 快速指南 | 快速使用指南 | クイックガイド | 요약 설명서

## In the box

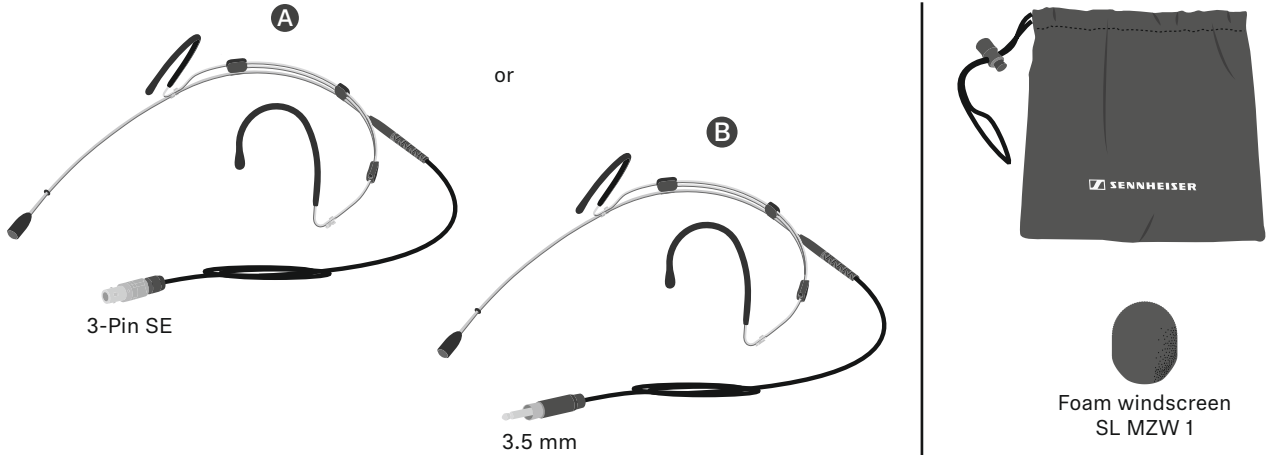


## Frequency response

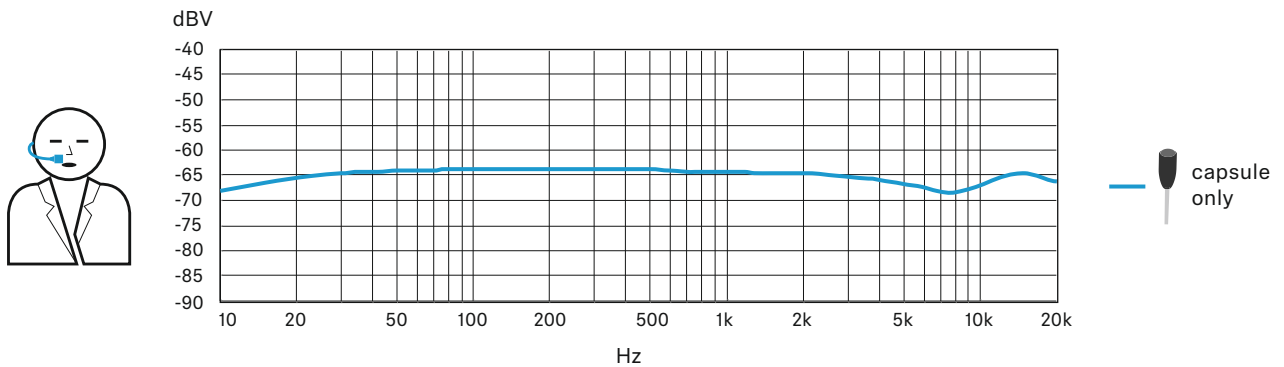

## Technical Data

Pick-up pattern	omni-directional
Frequency response	20 - 20.000 Hz
Sensitivity in free field, no load (1 kHz)	2.5 mV/Pa $\pm$ 3.5 dB
Nominal impedance	1 k $\Omega$
Min. terminating impedance	4.7 k $\Omega$
Equivalent noise level:	
A-weighted	30 dB
CCIR-weighted	42 dB
Max. sound pressure level	148 dB
Connector	3.5 mm or 3-Pin
Cable length	1.3 m
Diameter of microphone	4.8 mm
Weight (incl. plug, cable)	25 g

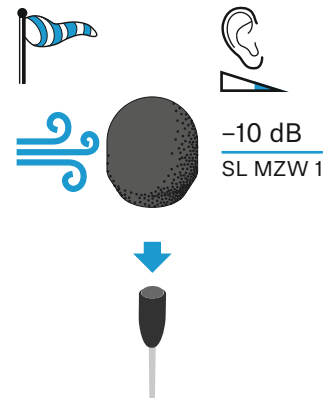


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany, [www.sennheiser.com](http://www.sennheiser.com)  
Printed in Germany, Publ. 10/21, 578670/A02


**SENNHEISER**

Setup / Using




1

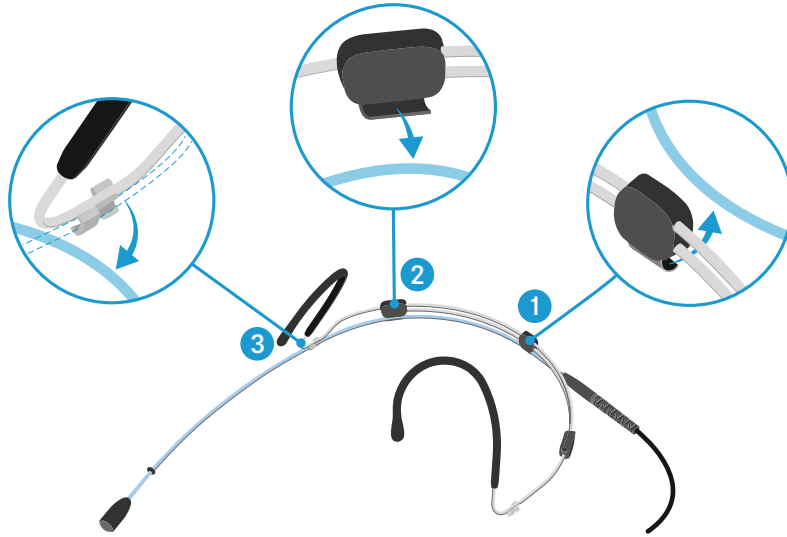


2 (A)

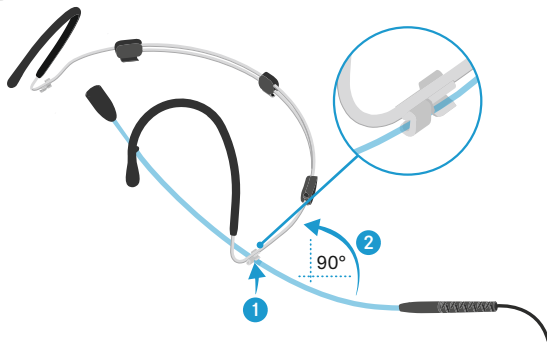

(B)

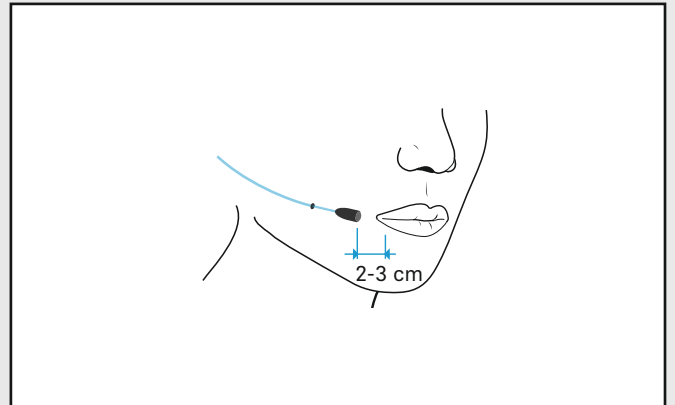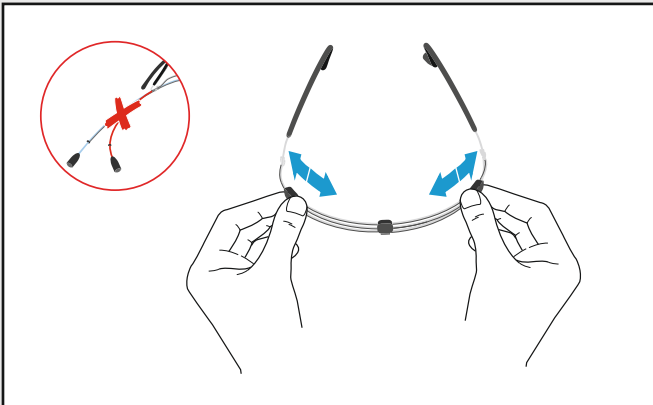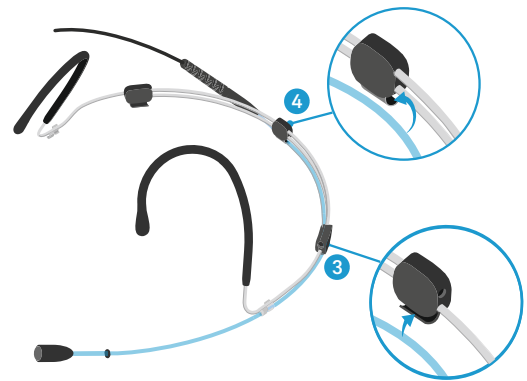

A

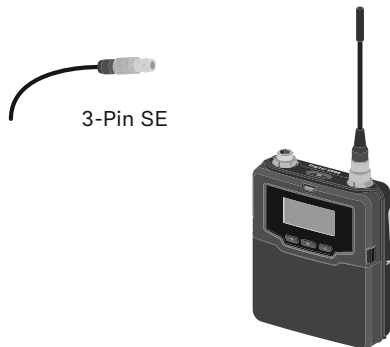

3-Pin SE

B



3.5 mm