



SENNHEISER

# Headmic 4

Model: Headmic 4  
Headmic black  
Headmic beige  
Headmic silver



Quick Guide  
 Kurzanleitung  
 Guide de démarrage rapide  
 Guida rapida  
 Instrucciones resumidas  
 Instruções resumidas  
 Beknopte gebruiksaanwijzing  
 Krótka instrukcja obsługi  
 Snabbguide  
 Kort vejledning  
 Pikaohje  
 Σύντομες οδηγίες  
 Kısa Kılavuz  
 Краткая инструкция  
 快速指南  
 快速使用指南  
 クイックガイド  
 요약 안내서

Sennheiser electronic GmbH & Co. KG


Am Labor 1, 30900 Wedemark, Germany  
www.sennheiser.com

Printed in Germany, Publ. 09/23, 592826 /A01


## In the box

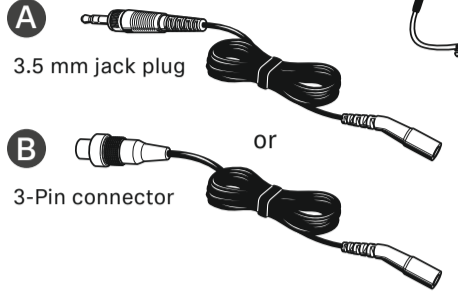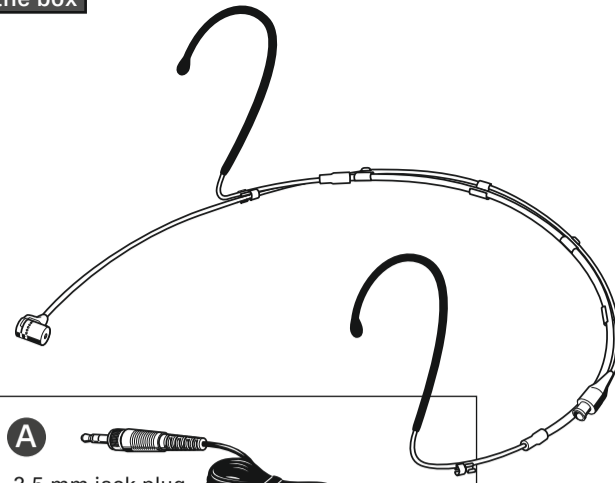

## Setup

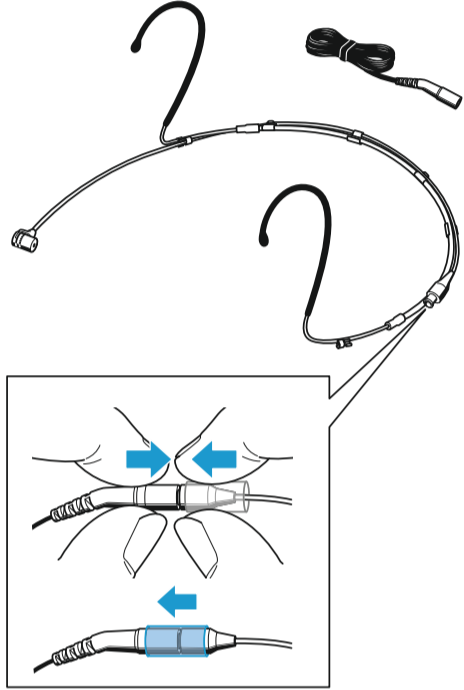


### 3.5 mm jack plug

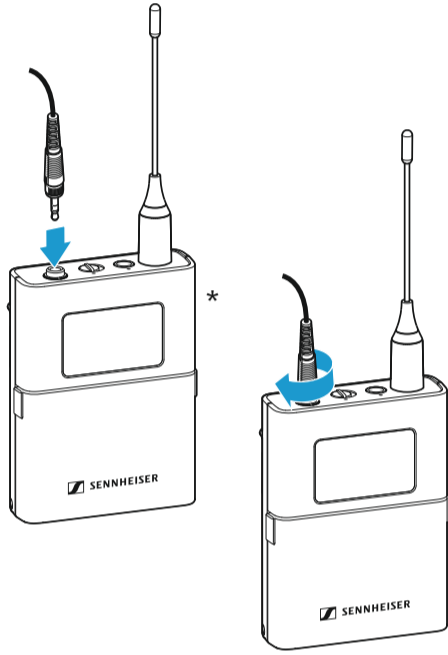


\*not included

### 3-Pin connector




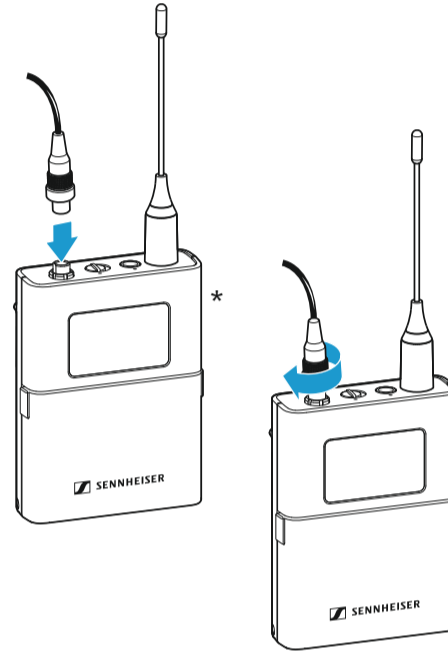


\*not included




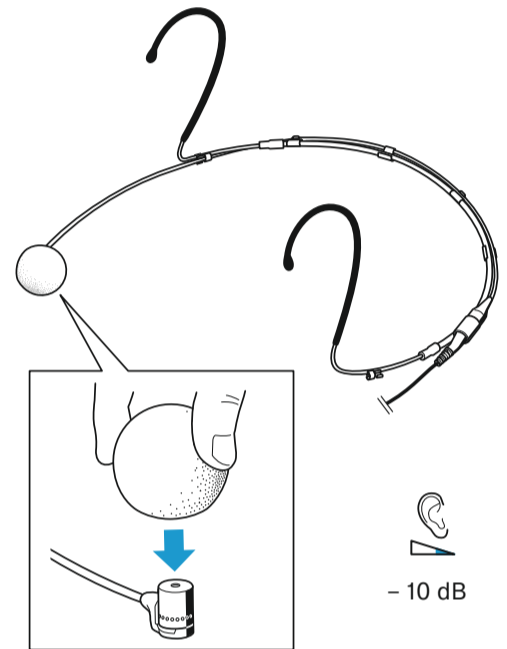


- 10 dB


## Wearing

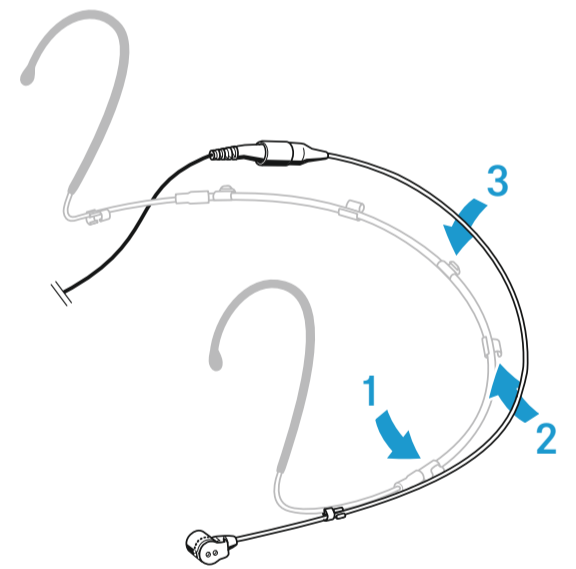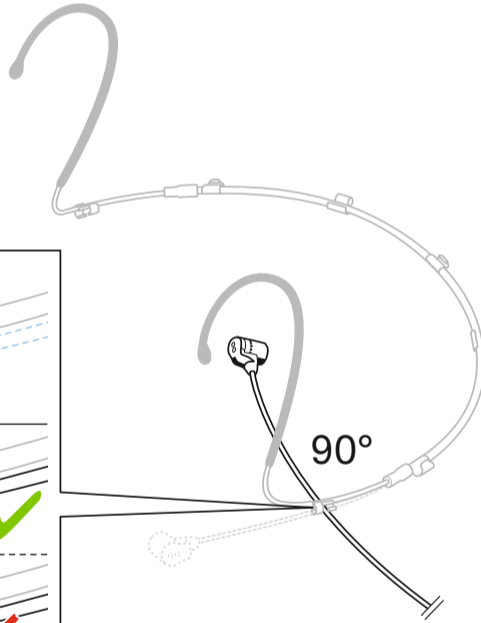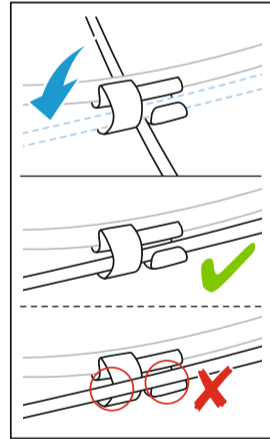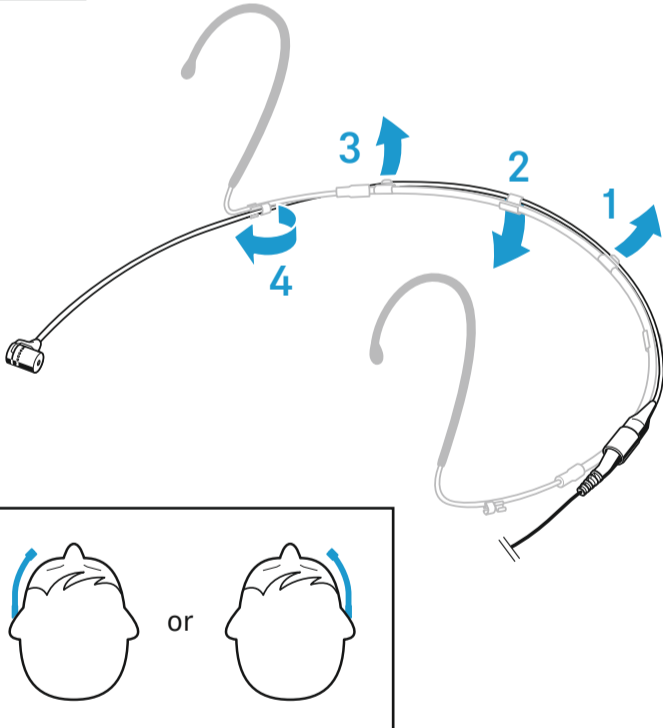

## Adjusting

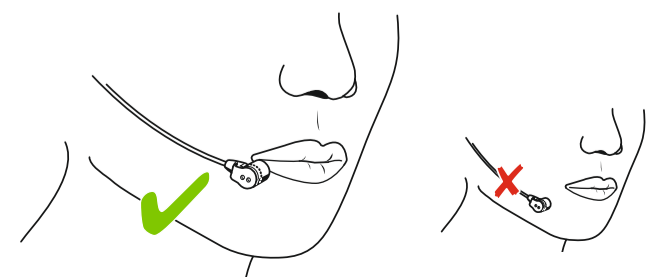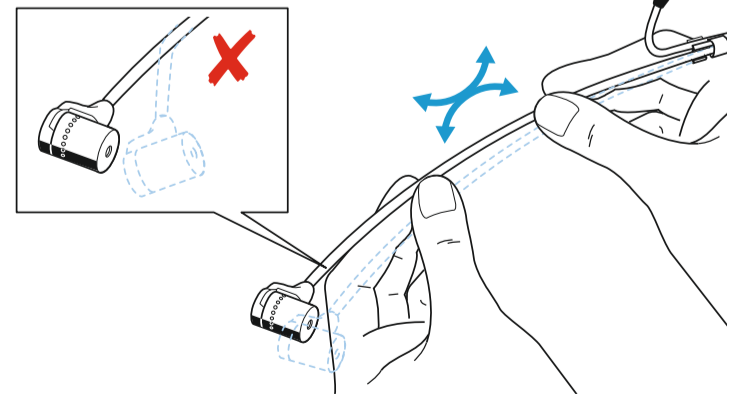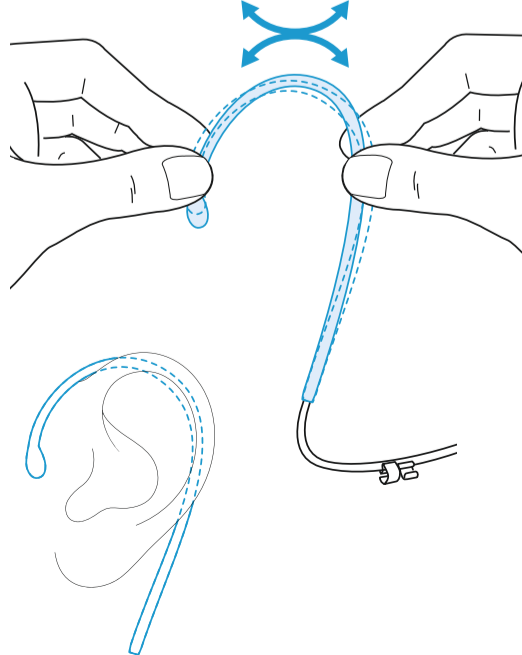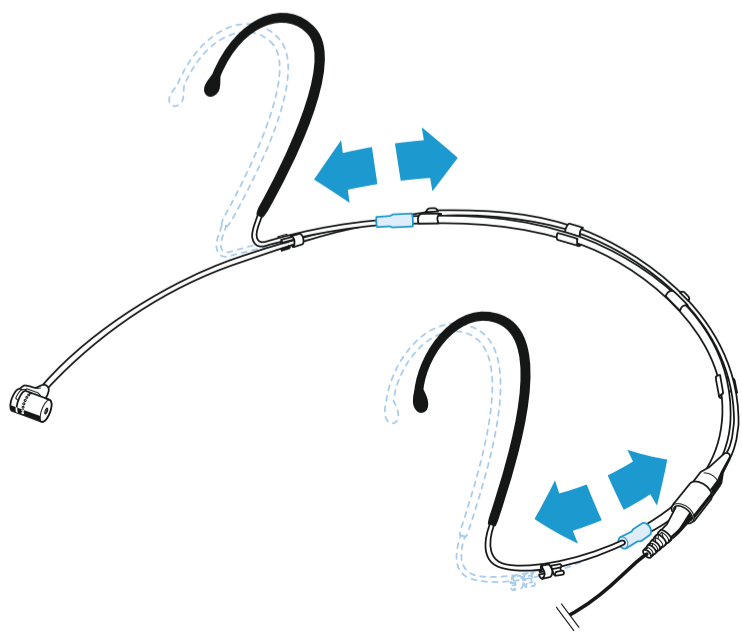


**Accessory**

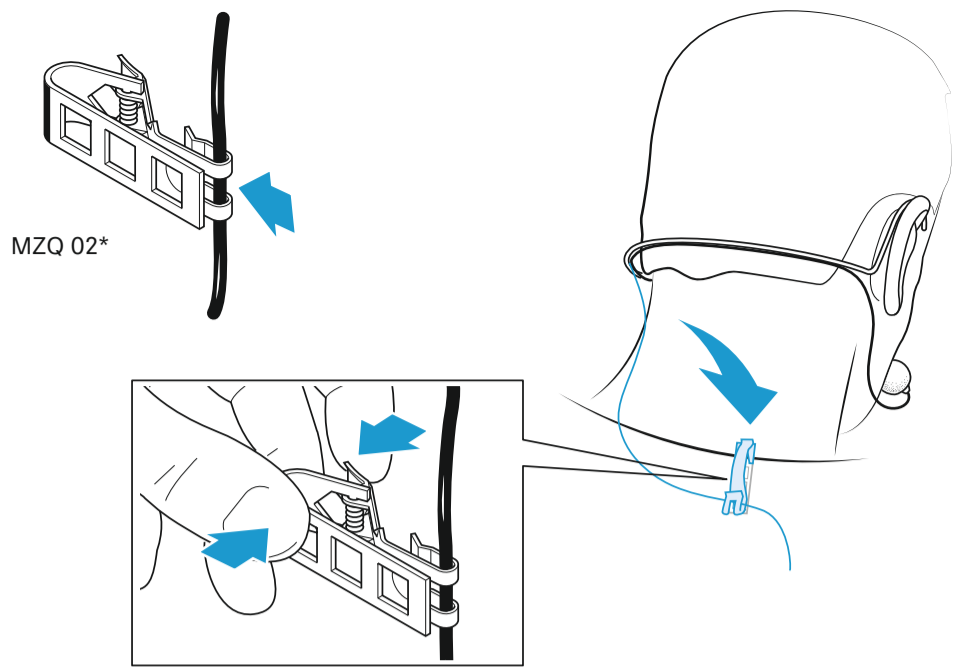



MZQ 02\*

\*not included

**Storing and transporting**

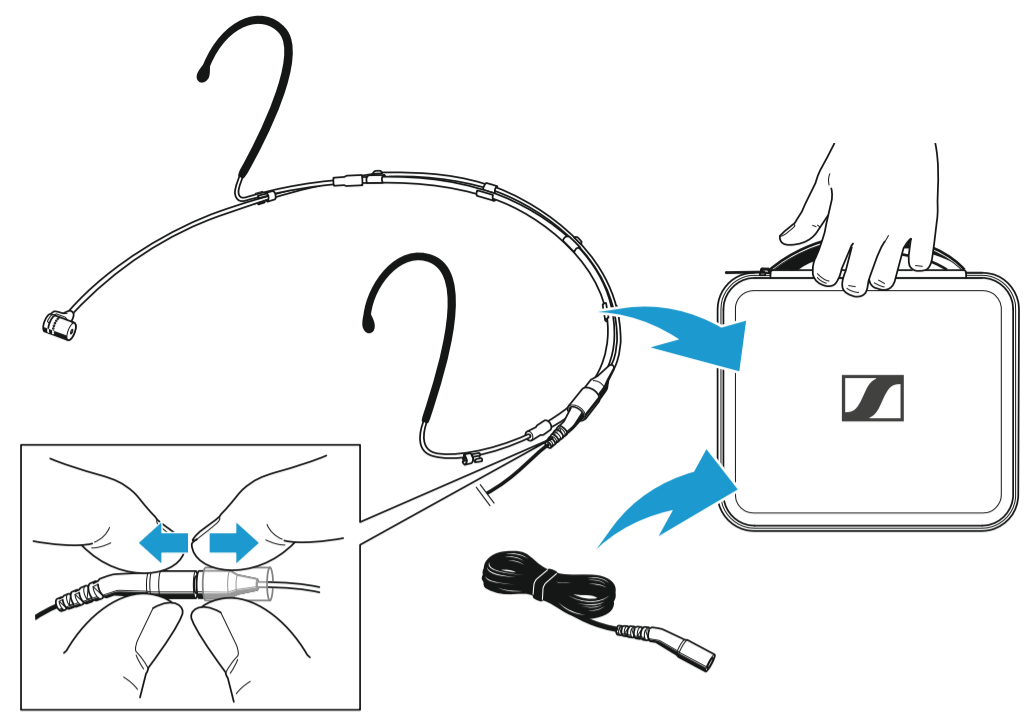


**Cleaning**

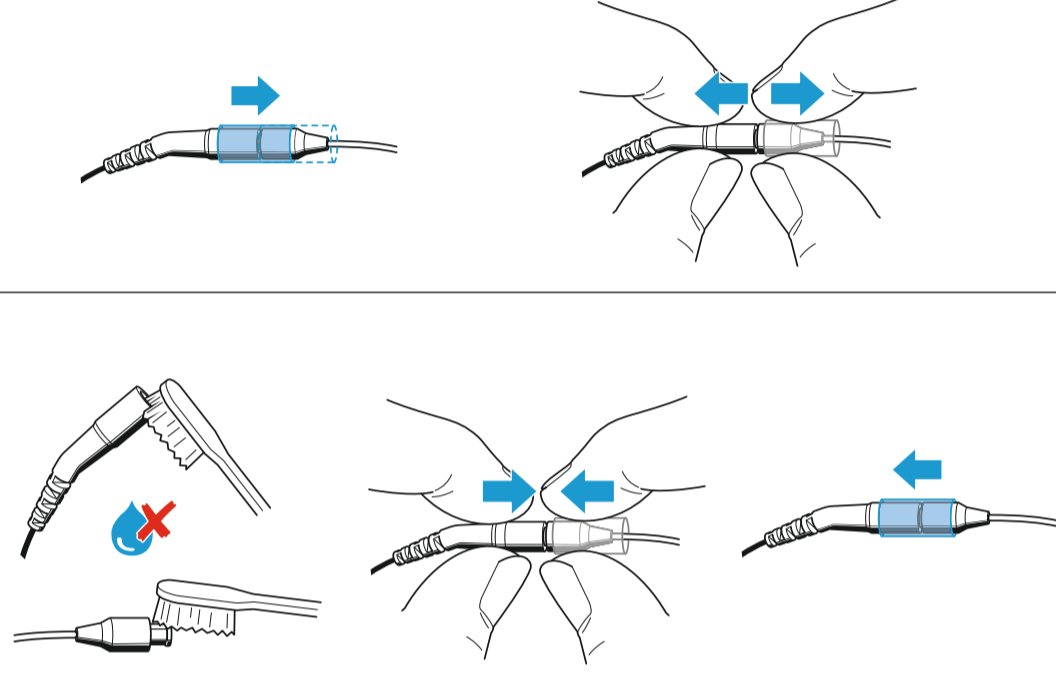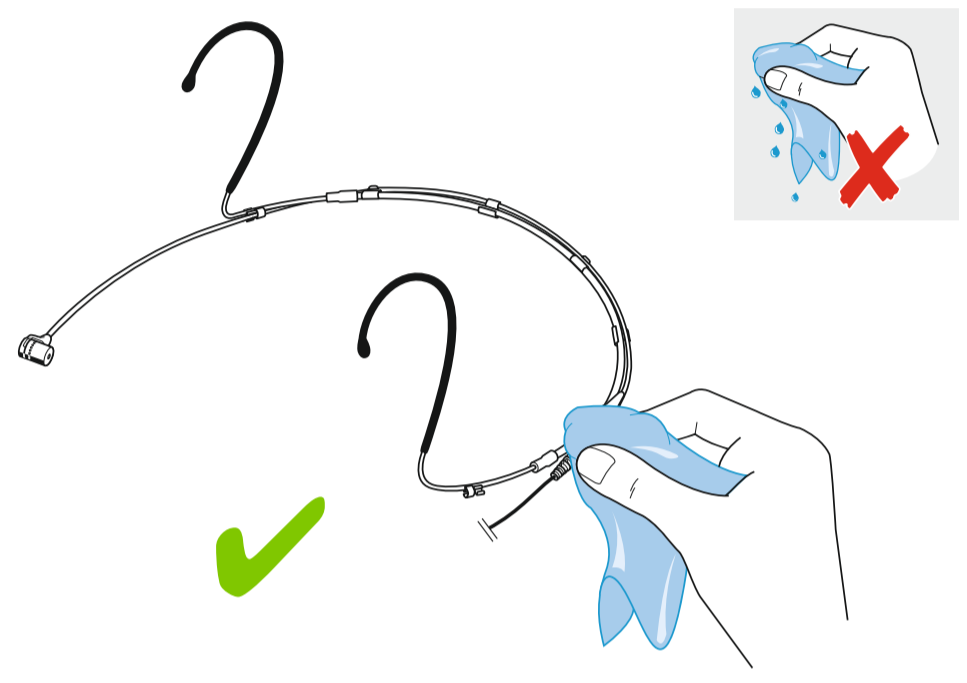

**Specifications**

Frequency response	20 - 20,000 Hz $\pm 2.5$ dB
Pick-up pattern	cardioid
Nominal impedance	1.2 k $\Omega$
Min. terminating impedance	4.7 k $\Omega$
Sensitivity	8 mV/Pa $\pm 2.5$ dB
Diameter of mic capsule	4.7 mm
Max. sound pressure level	143 dB
Equivalent noise level	30 dB(A)
Supply current	approx. 240 $\mu$ A
Power supply	4.5 - 15 V
Operating temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C
Storage temperature	-20 $^{\circ}$ C to +70 $^{\circ}$ C
Relative humidity	max. 90 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

**Polar pattern**

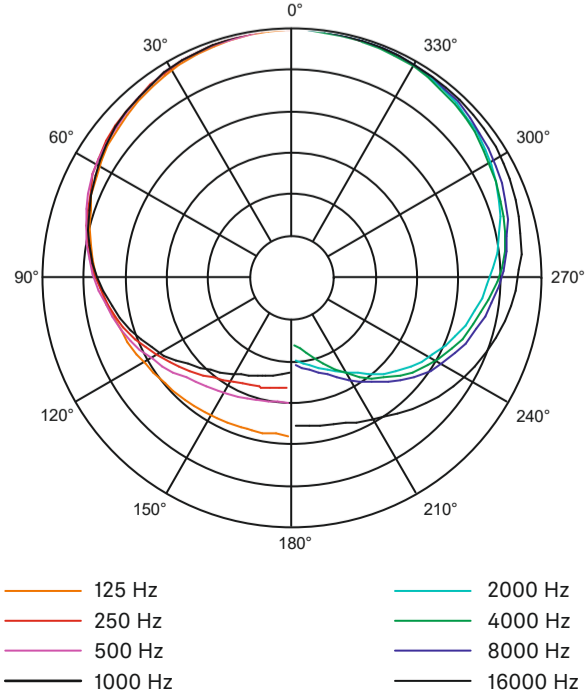

**Frequency response**

