


ILUMILINE SL

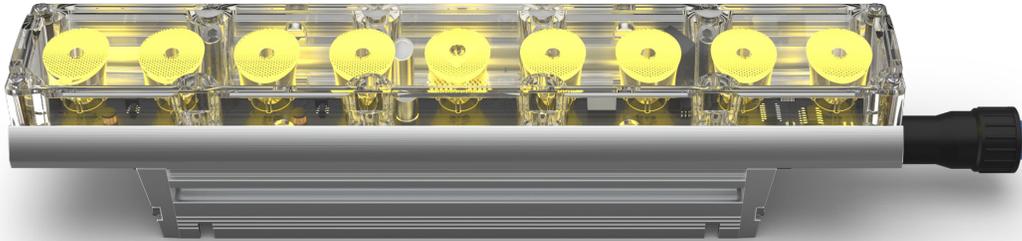

PRELIMINARY SPECIFICATIONS

OPTICAL

- Light Source: 9 LEDs (quad-color RGLB)
3.5 W, (200 mA)
- Light Source Lifespan: 50,000 hours based on LED manufacturer's specifications.
- Installed Optics: 12°
- Optional Optics: 20° Filter (medium),
40° Filter (wide), 55° Filter (very wide), 60 °x 10°
Asymmetric Filter
- Beam Angle: 14.5°
- Beam Angle (medium filter): 24.1°
- Beam Angle (wide filter): 36°
- Beam Angle (very wide filter): 38.1°
- Beam Angle (w/60x10° asymmetric filter):
39.9° x 19.4°
- Field Angle: 30°
- Field Angle (medium filter): 52.3°
- Field Angle (wide filter): 116.2°
- Field Angle (very wide filter): 128.1°
- Field Angle (w/60x10° asymmetric filter):
79.6° x 47.6°
- Cutoff angle: 49.6°
- Cutoff angle (medium filter): 91.9°
- Cutoff angle (wide filter): 158.6°
- Cutoff angle (very wide filter): 169.7°
- Cutoff angle (w/60x10° asymmetric filter):
114.2° x 158.8°

- Lumens: 808
- Lumens (medium filter): 706
- Lumens (wide filter): 643
- Lumens (very wide filter): 635
- Lumens (w/60x10° asymmetric filter): 676
- Base Illuminance: 251 lux @ 5 m
- Base Illuminance (medium filter) : 82 lux @ 5 m
- Base Illuminance (wide filter): 31 lux @ 5 m
- Base Illuminance (very wide filter): 25 lux @ 5 m
- Base Illuminance (w/60x10° asymmetric filter):
58 lux @ 5 m
- Efficacy @ Full: 34 lm/W
- Color Temperature Presets: Built-in

CONSTRUCTION/PHYSICAL

- Dimensions: 12 x 3.03 x 3.43 in
(305 x 77 x 87 mm)
- Weight: 2.65 lb (1.2 kg)
- Fixture Color: Brushed aluminum
- Housing Material: Extruded aluminum
- Lens Cover: ABS plastic
- Mounting Options: Bracket, XXX Hole Diameters

CONTROL SPECIFICATIONS

- Control Protocol: USITT DMX-512a, RDM
- Operating Modes: Selectable personalities,

via LOGIC Driver

- o Solid (1-Channel)
- o Arc 1 (3-Channel)
- o Arc 1+D (4-Channel)
- o Arc 2 (4-Channel)
- o Arc 2+D (5-Channel)
- o Arc Full (8-Channel)
- o Special 2 (9-Channel)
- Standalone Control: Yes
- Fixture setup: RDM Only
- Recommended control cable specification: CAT/AWG or specific Belden
- Data Connection: Data Connection: 3.7 ft (1.13 m) Proprietary Waterproof cable

ELECTRICAL SYSTEM SPECIFICATIONS

- Input Voltage: 100 to 277 VAC, 50/60 Hz (auto-ranging)
- Power and Current:
 - o 23 W, .200 A @ 120 V, PF: 94
 - o 22 W, .118 A @ 230 V, PF: 78
 - o 21 W, .113 A @ 277 V, PF: 71
- Power Supply: Electronic internal
- Dimmer: Electronic
- Power Linking: 52 units @ 120 V, 88 units @ 230 V, 92 units @ 277 V
- Power Connection: 3.7 ft (1.13 m) Hardwire to Proprietary Waterproof cable
- Recommended Power Cable: Power and Data Interface (14 AWG)
- Cable Connector Max Diameter: 1.18 in (30 mm)

THERMAL SPECIFICATIONS

- Cooling: Convection
- Startup Temperature Range: -4 °F to 113 °F (-20 °C to 45 °C)
- Operating Temperature Range: -40 °F to 113 °F (-40°C to 45 °C)
- Maximum Surface Temperature: 167 °F (75 °C)
- Minimum Distance to Illuminated Surface: 3.28 ft (1 m)
- Minimum Distance to Flammable Surface: .98 ft (.3 m)
- BTU at various voltages:
 - o 78 BTUs/hr @ 120 V, 60 Hz
 - o 72 BTUs/hr @ 208 V, 60 Hz
 - o 75 BTUs/hr @ 230 V, 50 Hz
 - o 72 BTUs/hr @ 277 V, 50 Hz

REGULATORY & VOLUNTARY QUALIFICATION

- Certification Listings: UL, MET, CE, RoHS, FCC
- Environment: Dry/Damp/Wet location, All indoor and limited outdoor permanent installations.
 - o Please refer to the User Manual for more detailed information on installation.
- Warranty: 36-month manufacturer's limited warranty (for covered regions only)
- Installation Orientation: Any, Vertical only, Horizontal only

ACCESSORIES

- Required: RDM Device, Power and Data Interface
- Optional: 20° Filter (medium), 40° Filter (wide), 55° Filter (very wide), 60 °x 10° Asymmetric Filter Filter, Power and Data extension cable