



» NEUMANN.BERLIN


- » KK 104 U
- » KK 105 U



PUBL. 11/23 · 597259/A01

Quick Guide
 Kurzanleitung
 Guide rapide
 Guida rapida
 Guía de inicio rápido
 Pikaohje
 Γρήγορος οδηγός
 Kısa Kılavuz
 Краткая инструкция

Guia rápido
 Beknopte handleiding
 Krótka instrukcja obsługi
 Snabbguide
 Kort vejledning
 快速指南
 クイックガイド
 퀵 가이드

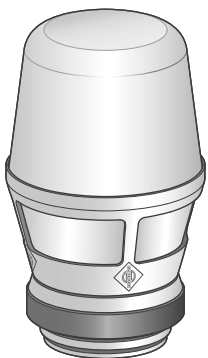

Instruction manual | Bedienungsanleitung | Notice d'emploi |
 Istruzioni per l'uso | Instrucciones de manejo | Manual de instruções |
 Gebruiksaanwijzing | Instrukcja obsługi | Bruksanvisning |
 Betjeningsvejledning | Käyttöohje | Οδηγίες λειτουργίας | Kullanım kılavuzu |
 Инструкция по эксплуатации | 使用说明书 | 取扱説明書 | 사용 설명서 |



www.neumann.com | KK 104 U | KK 105 U



Specifications	KK 104 U	KK 105 U
Directional pattern	Cardioid	Supercardioid
Frequency range	40 Hz - 20 kHz	40 Hz - 20 kHz
Sensitivity at 1 kHz into 50 kΩ ¹⁾	4.8 mV/Pa \cong -46.3 dBV \pm 1 dB	4 mV/Pa \cong -48 dBV \pm 1 dB
Signal-to-noise ratio, CCIR ²⁾ (rel. 94 dB SPL)	62 dB	62 dB
Signal-to-noise ratio, A-weighted ²⁾ (rel. 94 dB SPL)	74 dB	73 dB
Equivalent noise level, CCIR ²⁾	32 dB	32 dB
Equivalent noise level, A-weighted ²⁾	20 dB-A	21 dB-A
Maximum SPL for THD \leq 0.5% ³⁾	150 dB	152 dB
Weight	approx. 177 g	approx. 183 g
Dimensions (diameter / length)	\varnothing 48 mm / 80 mm	\varnothing 48 mm / 80 mm
Operating temperature range	0 °C - +70 °C (32 °F - 158 °F)	0 °C - +70 °C (32 °F - 158 °F)
Storage temperature range	-20 °C - +70 °C (-4 °F - 158 °F)	-20 °C - +70 °C (-4 °F - 158 °F)
Humidity range	max. 90 % at +20 °C	max. 90 % at +20 °C

¹⁾ all values for supply voltage 5V and load impedance \geq 50 kΩ ²⁾ according to IEC 60268-1; CCIR-weighting according to CCIR 468-3, quasi peak; A-weighting according to IEC 61672-1, RMS ³⁾ measured as equivalent el. input signal

KK 104 U

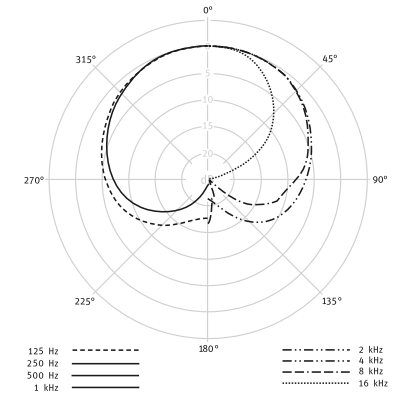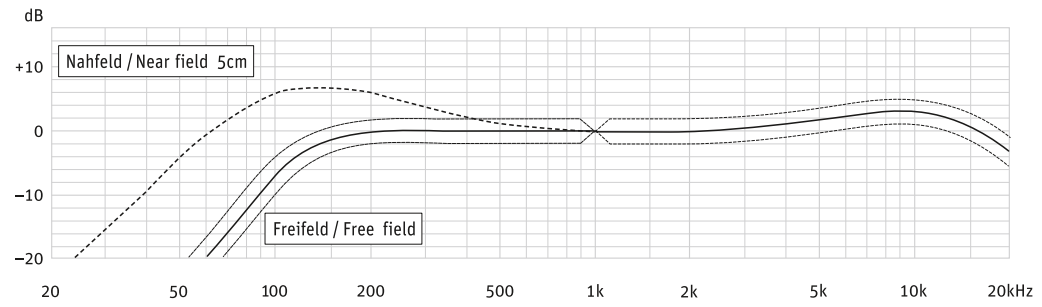

KK 105 U

