



▶▶ NEUMANN.BERLIN

- ▶ KK 104 S
- ▶ KK 105 S
- ▶ KK 204
- ▶ KK 205



PUBL. 06/18 - 578652/A01



Quick Guide  
Kurzanleitung  
Guide rapide  
Guía rápida  
Guía de inicio rápido  
Pikaohje  
Γρήγορος οδηγός  
Kısa Kılavuz  
Краткая инструкция

Guia rápido  
Beknopte handleiding  
Krótka instrukcja obsługi  
Snabbguide  
Kort vejledning  
快速指南  
クイックガイド  
퀵 가이드

KK 104 S



KK 105 S

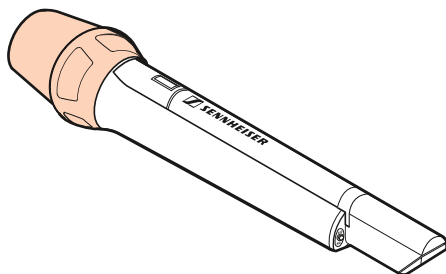



\*Sennheiser SKM 5200/5000



KK 204



KK 205

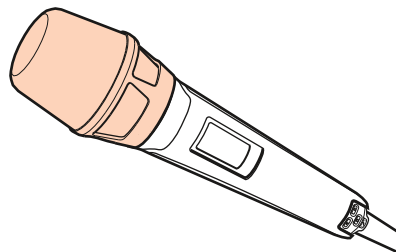

\*Sennheiser SKM 6000/SKM 9000

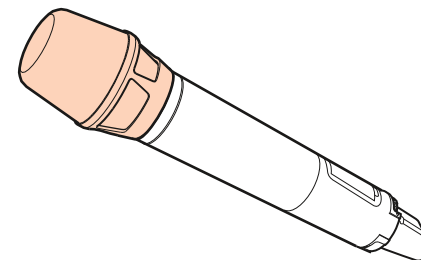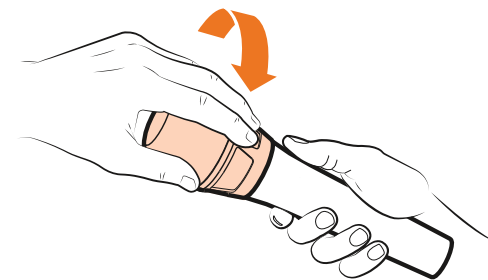

\*Sennheiser SKM 2000  
SKM 300 G4/SKM 500 G4  
SKM 300 G3/SKM 500 G3



Instruction manual | Bedienungsanleitung | Notice d'emploi | Istruzioni per l'uso | Instrucciones de manejo |  
Manual de instruções | Gebruiksaanwijzing | Instrukcja obsługi | Bruksanvisning | Betjeningsvejledning |  
Käyttöohje | Οδηγίες λειτουργίας | Kullanım kılavuzu | Инструкция по эксплуатации | 使用说明书 |  
取扱説明書 | 사용 설명서 |



[www.neumann.com](http://www.neumann.com) | KK 104 S | KK 105 S | KK 204 | KK 205

Specifications	KK 104 S	KK 105 S	KK 204/205
Directional pattern	Cardioid	Supercardioid	Cardioid/Supercardioid
Frequency range	80 Hz - 20 kHz	80 Hz - 20 kHz	40 Hz - 20 kHz
Sensitivity at 1 kHz into 1 kΩ	1.7 mV/Pa $\approx$ -55.4 dBV $\pm$ 1 dB	1.3 mV/Pa $\approx$ -58 dBV $\pm$ 1 dB	2.8 mV/Pa $\approx$ -51 dBV $\pm$ 1 dB
Signal-to-noise ratio, CCIR <sup>3)</sup> (rel. 94 dB SPL)	52 dB	50 dB	59 dB
Signal-to-noise ratio, A-weighted <sup>1)</sup> (rel. 94 dB SPL)	63 dB	61 dB	70 dB
Equivalent noise level, CCIR <sup>3)</sup>	42 dB	44 dB	35 dB
Equivalent noise level, A-weighted <sup>1)</sup>	31 dB-A	33 dB-A	24 dB-A
Maximum SPL for THD $\leq$ 0.5% <sup>2)</sup>	148 dB	150 dB	150 dB
Weight (incl. transmitter + power supply unit)	approx. 325 g	approx. 325 g	approx. 500 g
Dimensions (diameter / length)	$\varnothing$ 48 mm / 257 mm (incl. transmitter)	$\varnothing$ 48 mm / 257 mm (incl. transmitter)	$\varnothing$ 55 mm / 272 mm (incl. SKM 2000)
Operating temperature range	0 °C - +70 °C (32 °F - 158 °F)	0 °C - +70 °C (32 °F - 158 °F)	0 °C - +70 °C (32 °F - 158 °F)
Storage temperature range	-20 °C - +70 °C (-4 °F - 158 °F)	-20 °C - +70 °C (-4 °F - 158 °F)	-20 °C - +70 °C (-4 °F - 158 °F)
Humidity range	max. 90 % at +20 °C	max. 90 % at +20 °C	max. 90 % at +20 °C



<sup>1)</sup> according to IEC 60268-1; CCIR-weighting according to CCIR 468-3, quasi peak; A-weighting according to IEC 61672-1, RMS

<sup>2)</sup> measured as equivalent el. input signal



**KK 104 S**

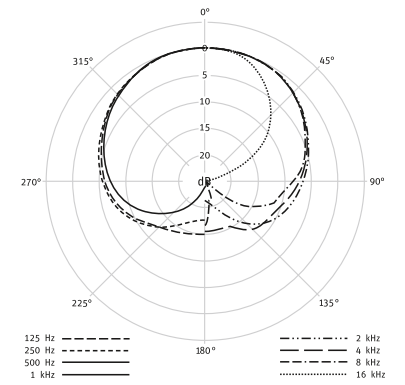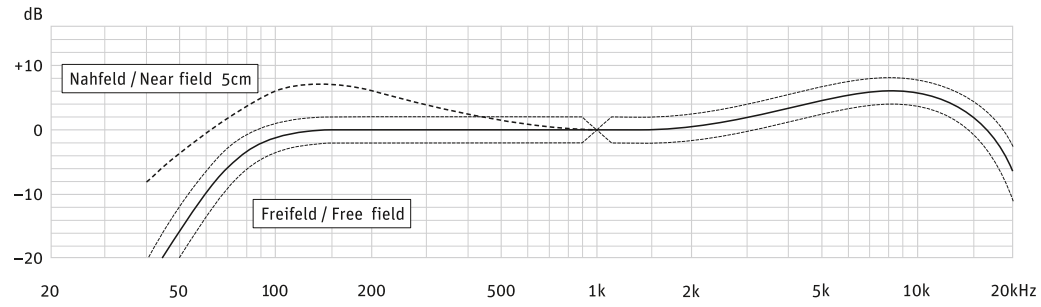

**KK 105 S**

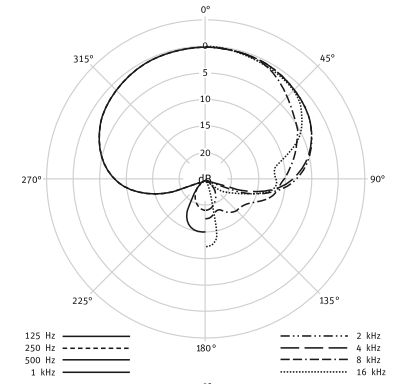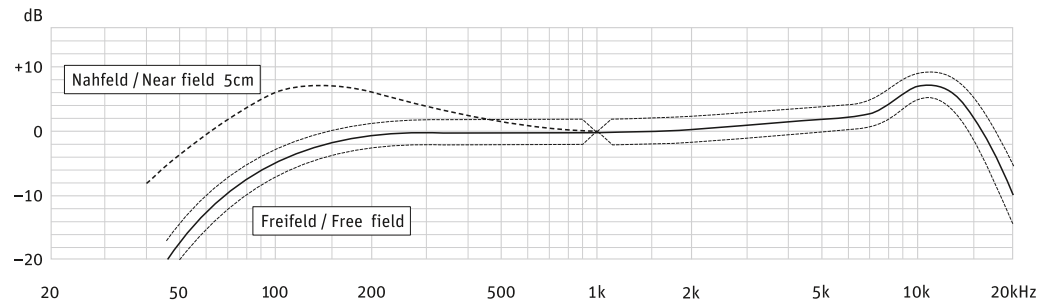

**KK 204**

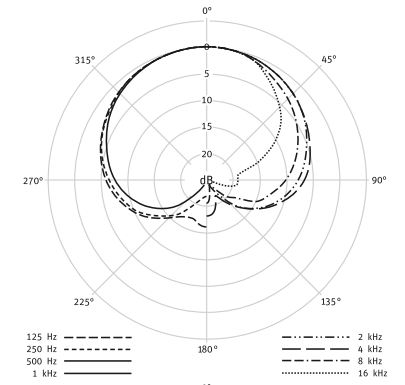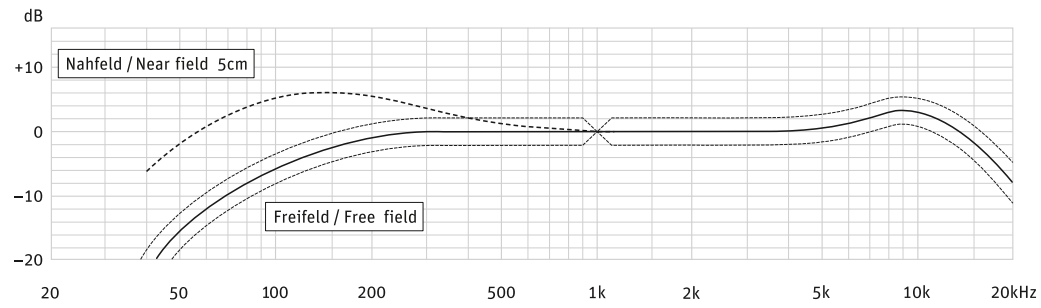

**KK 205**

