# **KL FRESNEL 8 FC**





FEATURES

**RGBMA LED Engine** 

Dynamic White + Full Spectrum Color Control

18,000 Total Fixture Lumen Output

10° to 50° Wide Motorized Zoom

Stand-Alone control with 2 Encoders and LED Display

Smooth 16-bit Selectable Dimming Modes and Curves

LED Refresh Rate Adjustment

Flicker Free Operation for TV and FILM

RDM (Remote Device Management)

8-leaf Barn Doors, Gel Frame and Junior Pin (1 1/8" -

28mm) included

PROFESSIONAL

The **KL Fresnel 8 FC™** is a full-color-spectrum LED fixture that provides high output, precise color temperature control, full spectrum color rendering and even wash coverage. Optimized for the tunable white light requirements of Film and Television, it is an ideal key and fill light source for many situations requiring outstanding performance and color quality, while offering a wide array of rich saturated colors and subtle pastels. The KL Fresnel 8 FC incorporates a highly efficient 5-in-1 (RGBMA) LED engine that produces up to 18,000 field lumens with a motorized Zoom range of 10° to 50°. Outstanding color rendering guality, precise CCT presets and remotely adjustable LED refresh frequency makes this unit the perfect choice for todays fast paced production environments. Rugged and portable, the fixture can be mounted on a stand or suspended using any standard clamp or the included Junior pin adapter. It is fully self-contained without the need for an external power supply and offers locking power pass through for easy linking of multiple units. The KL Fresnel 8 FC can be operated through industry standard DMX protocols and has full RDM support. In addition, it offers manual access using the included encoders and display, providing instant control of Zoom, Intensity, Color temperature, Green shift and other important settings. The display and encoders are conveniently positioned at the bottom side of the fixture to ensure unobstructed access while mounted on a stand.



Specifications subject to change without notice ©Elation Professional 07/21/21 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040

# specifications | ELATION KL FRESNEL 8 FC | www.elationlighting.com

# PRODUCT SPECIFICATIONS

#### SOURCE

6500K RGBMA LED Engine 50,000 Hour Average LED Life\*

\*May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

## PHOTOMETRIC DATA

18,000 Total Lumen Output CRI 94.5 TLCI 94 Zoom Range 10° - 50° Beam Angle 10.4° - 50.8° Field Angle 20.6° - 66.1°

#### EFFECTS

Motorized Zoom Electronic Dimmer and Strobe Variable 16-bit Dimming Modes and Curves

### COLOR

RGBMA Color Array CMY Emulation Variable CCT 2,400K - 8,500K Green/Magenta Shift Virtual Gel Swatch Book

### CONTROL / CONNECTIONS

6 DMX Channel Modes (1 to 18 channels) Manual and DMX Controlled Dimmer, Color and Zoom Dual Rotary Dials 4 Button Control Panel, LED Display RDM (Remote Device Management) 3/5pin DMX and IP65 Locking Power In/ Out Connection

### SIZE / WEIGHT

Length: 15.1" (382.5mm) Width: 12.9" (326.5mm) Vertical Height: 17.9" (455mm) Weight: 23.15 lbs. (10.5kg)

#### **ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz 514W Max Power Consumption 5°F to 113°F (-15°C to 45°C)


#### **INCLUDED ITEMS**

Gel Frame and Rotating 8-leaf Barn Doors Junior Pin (1 1/8″ - 28mm) IP65 Locking Power Cable


# APPROVALS / RATINGS

(pending) CE | cETLus | IP20 Specifications and documentation subject to change without notice.

ORDERING INFORMATION	
KLF832	KL Fresnel 8 FC (US SKU)
1236100183	KL Fresnel 8 FC (EU SKU)

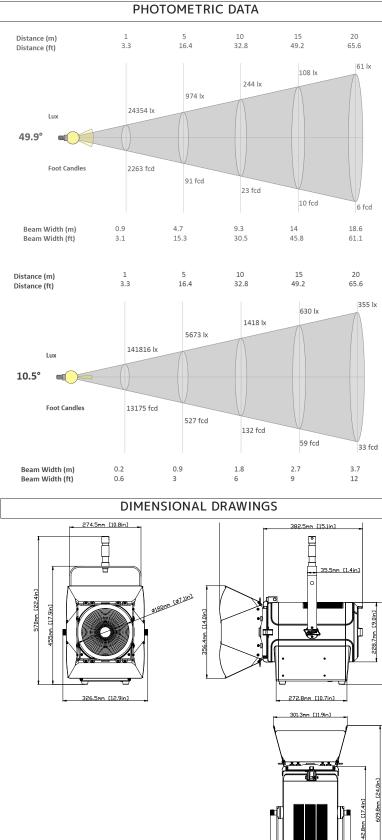





\*DRAWINGS NOT TO SCALE

315.5mm [12.4in]

24 Rmm [28 5in



Specifications subject to change without notice ©Elation Professional 07/21/21

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu