

WIRELESS DMX MODULE

(M/N 900-3601)


Compatible with LumenRadio CRMX Systems
Wireless Solutions (G2, G3, G4, G4S 2.4GHz Mode)

STEP 1

Find the port on the light fixture marked with the Litepanels® COMMS logo. Open the protective cover if necessary.



Insert the MODULE completely into the PORT, ensuring that the keyway on the MODULE aligns with the key on the PORT.

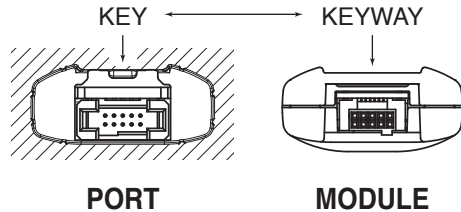

STEP 2

On the light fixture's onscreen menu, select SETTINGS → IN/OUT SELECT → WIRELESS DMX IN

STEP 3

To connect to wireless transmitter, select SETTINGS → DMX SETTINGS → WIRELESS DMX → LINK RADIO

STEP 4

Activate RF Link on the wireless transmitter (not included).

STEP 5

To set the desired DMX address, go to SETTINGS → DMX SETTINGS → DMX ADDRESS

STEP 6

Position the omni-directional antenna on the Wireless DMX Module for max signal strength.

For additional product information visit litepanels.com

