



# PRISMA DRIVER 8IP

## SPECIFICATIONS / TECHNICAL DATA



## KEY FEATURES

Features include a rugged IP65 housing, easy keyhole slots for wall and surface mounting, multiple DMX control modes, an onboard 4 button touch control panel, 8x 4pin locking output sockets, DMX 5pin locking XLR in/out and locking power in/out. The Prisma Driver 8IP also comes with 8x 4pin Connection Kits included in the box.

## PRODUCT DESCRIPTION

**PRISMA DRIVER 8IP™** is an easy to use 48VDC, IP65 protected, driver system which provides individual DMX-512 control including variable delayed time dimming modes for up to (8) PRISMA MINI UV LED series fixtures including the PRISMA MINI PAR 20™, PRISMA MINI PAR 45™ and the PRISMA MINI BAR 20™, and comes with 8x 4pin Connection Kits

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Rugged IP65 Housing

Easy Keyhole Slots for Wall/Surface Mounting

### CONTROL

Multiple DMX Channel Modes

Onboard 4 Button Touch Control Panel

DMX-512 and RDM Protocol Support

### CONNECTIONS

8x 4pin locking output sockets (8 PRISMA MINI fixtures max)

“Includes 8x 4pin Connection Kits”

Locking 5pin XLR Connector In/Out

IP65 Locking Power Connector In/Out

With Wired Digital Communication Network

MAGMATIC



# PRISMA DRIVER 8IP

## SPECIFICATIONS / TECHNICAL DATA

### SIZE / WEIGHT

Length: 9.0 in. (227.8mm)  
Width: 10.4 in. (264mm)  
Height: 4.2 in. (105.9mm)  
Weight: 8.05 lbs. (3.65 kg)

### ELECTRICAL

AC90-240V, 50-60Hz  
48VDC 8.3A  
167W Max Power Consumption

### THERMAL

Maximum Temperature (Ambient): 113° F (45° C)  
Minimum Temperature (Ambient): 14° F (-10° C)


### APPROVALS / RATINGS

CE | cETLus \*Pending | IP65 (Temporary outdoor use only)

### OPTIONAL ACCESSORIES

STR501, STR514, STR527  
PIXEL BC2, PIXEL BC3, PIXEL BC5  
SIP064, SIP113, SIP126  
SIP1MPC10, SIP1MPC15, SIP1MPC25  
\*additional lengths available

Specifications and documentation subject to change without notice.

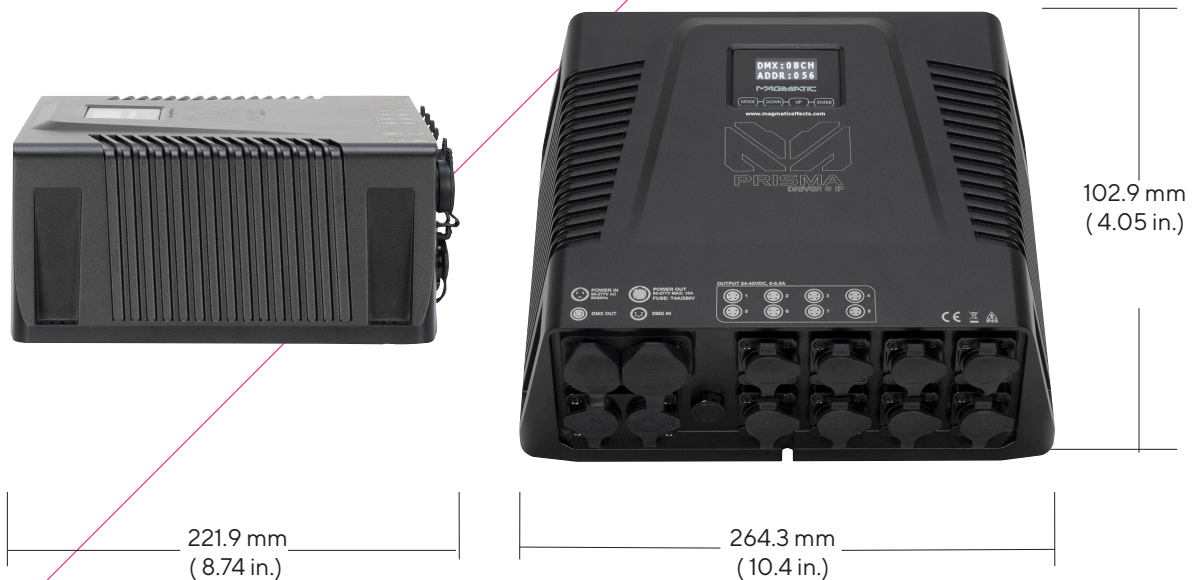

MAGMATIC