

# ELP CL IP

## Acoustic Test Report



©2017 HARMAN Professional Denmark ApS. Information subject to change without notice. HARMAN Professional and all affiliated companies disCL IPaim liability for any injury, damage, direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document.

Martin®, HARMAN® and all other trademarks in this document pertaining to services or products by HARMAN Professional or its affiliates and subsidiaries are registered as the property of HARMAN Professional Denmark ApS.

HARMAN Professional Denmark ApS - Olof Palmes Allé 18 - 8200 Aarhus N - Denmark - [www.martin.com](http://www.martin.com)

## Title

ELP CL IP Acoustic Test Report

## Test conditions

Test carried out according to ISO 3744:2010(E)

## Device tested

Make: HARMAN Professional Denmark ApS

Model: ELP CL IP

Serial no: 15300326822

Software version: V: 1.0.04

## Results

An image of the test setup can be found on Page 4. Test results are listed in Table 1 on Page 6. Figures of measurement results are shown in Appendix A on Page 8.

HARMAN Professional Denmark ApS, R&D QA are responsible for the test results given in this report.

## Environment

Temperature: 23.4°C Ta

Humidity: 48.4 %RH

AC mains power: 230 V, 50 Hz

Background noise level: 7.89dBA

Warm-up time: 30 minutes at full intensity.

Fixture placement: Fixture was placed at least one meter from walls and ceiling, as described in the Standard ISO 3744:2010(E)

## Remarks

Test results apply only to the tested specimen.

Rev: (last five)	Made by:	Description:	Approved by:	Date approved:
A	Dana Yang	ELP CL IP Sound Measurement	Mark Buss	2020-10-09

## Setup

The product was placed indoors in a semi-anechoic room in the external Lab of Harman Technology in Shenzhen, China (See Figure 1). The ceiling and walls were all acoustically absorbent and the floor was reflective. The main dimensions of the room were 4.0m \* 3.6m \* 2.6m (length \* width \* height).

HARMAN Professional Denmark ApS




**Figure 1: Test setup**

The product was allowed a minimum 10 minutes of warm-up time before measurements were performed.

## Measurement method

Measurements were carried out using a setup with 1 microphone. The microphone was in turn moved to the measurement positions described below.

Measurement setup at hemispherical measurement model, as Fixture 2

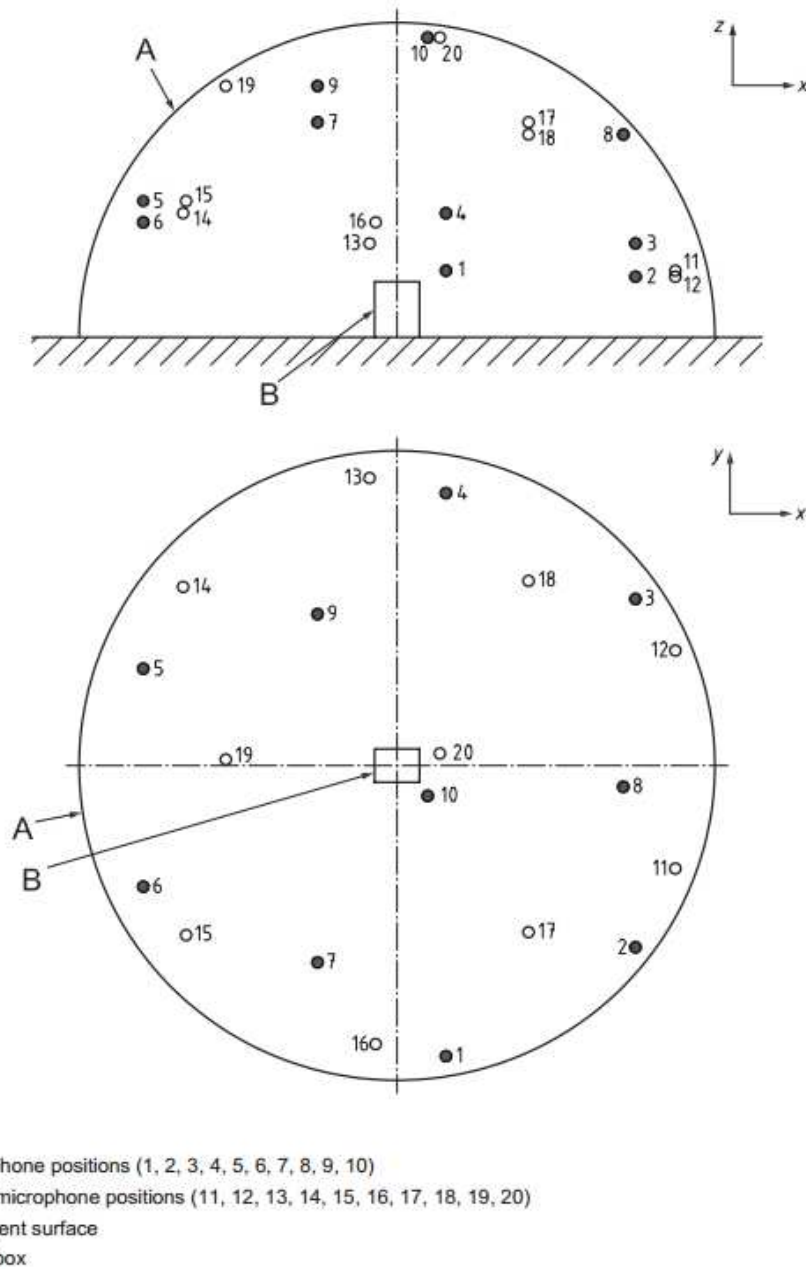

**Figure 2: Microphone Positions**

Note:

1.  $R=1.5\text{m}$ .
2.  $S=2 \pi R^2$ , Measurement surface area:  $14.14 \text{ m}^2$ .
3. 10 key microphones were taken measurement, as the range of A-weighted sound pressure levels measured at position 1 to 10 does not exceed 10 dB, additional 11 to 20 can be not considered.
4. The dimensions of the reference box: 65 cm x 26 cm x 25 cm.

## Instrumentation

Please refer to Page 8 for a full instrumentation list.

## Results

The ELP CL IP was measured in 2 different scenarios:

1. Be set at 100% white output, the cooling mode is set to Regulated, on High Quality mode.
2. Be set at 100% white output, the cooling mode is set to Low, on High Quality mode

Test positions and sound pressure levels are shown in Table 1.

Sound Pressure Levels		
Distance from fixture	Regulated [ dB(A) ]	Low [ dB(A) ]
LpA at 0m	30.56	25.13
LpA at 1m	22.56	17.13
LpA at 4m	10.56	5.13
LpA at 7m	5.66	0.23

The duration of the acoustical measurement for each position is 30s.

After calculated the time-averaged sound pressure levels of all positions and background noise, the difference between the two values is more than 15dB, therefore no correction for background noise shall be applied.

**Table 1: Sound Pressure Levels**

Sound Pressure Levels have been converted from Sound Power Levels using the formula:  $LpA = (LwA - \text{reduction}_{\text{distance}})$

Reductions used: 8dB(A)@1m, 20dB(A)@4m, 24.9dB(A)@7m

## Noise level details

Appendix A displays measurement detail of noise level in Regulated Fan Mode scenario.


## Instrumentation

Equipment	Maker	Type
No.:SZE029-2	Brüel & Kjær	Pulse analysis system
No.:SZE029-7	Brüel & Kjær	Microphone Type4955
No.:SZE029-3		Semi-anechoic room
No.:SZE039-5		Digital Barometer
No.:SZE020-14		Data logger for atmosphere & environment


**Table 2: Instruments Used**

# Appendix A: Measurement of Noise Level in Regulated Fan Mode


## Position 1

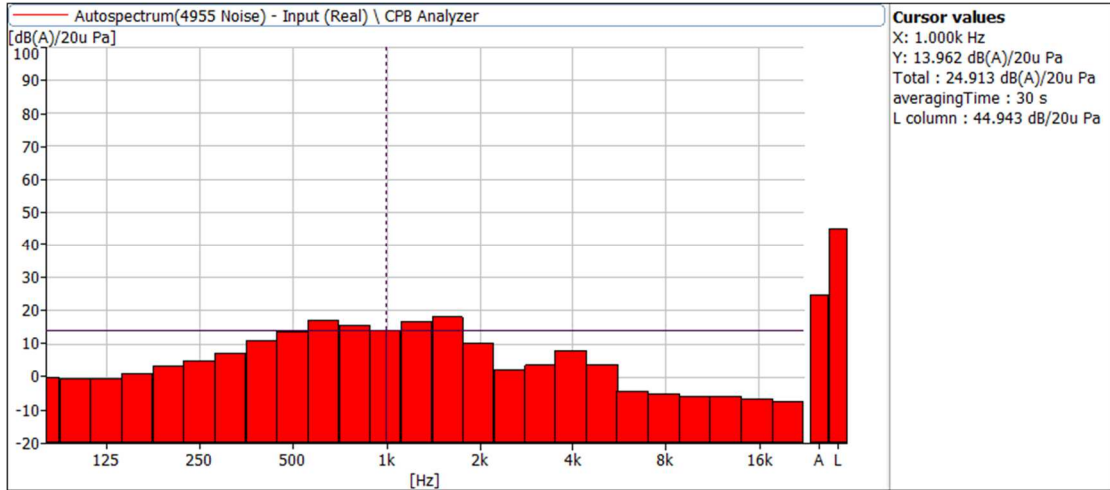

## Position 2

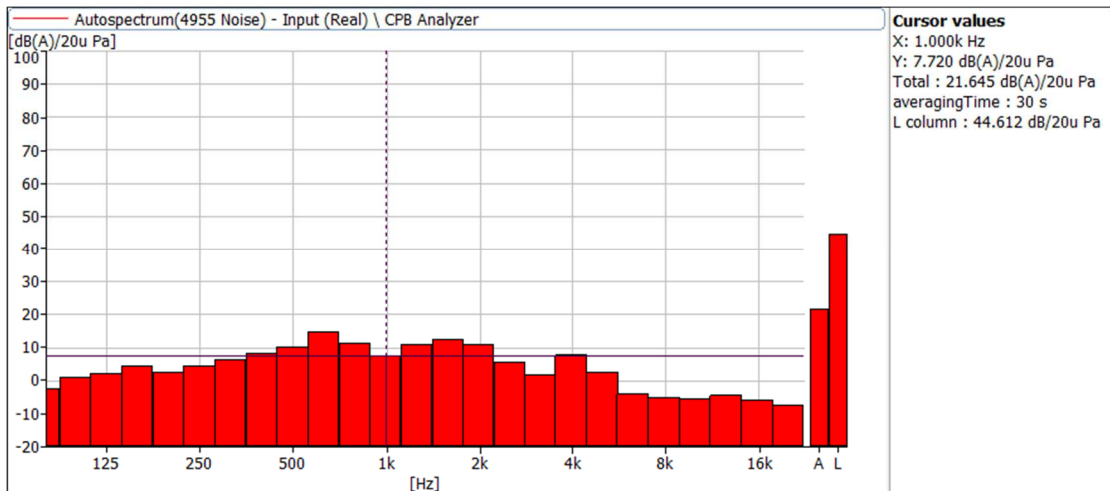


## Position 3

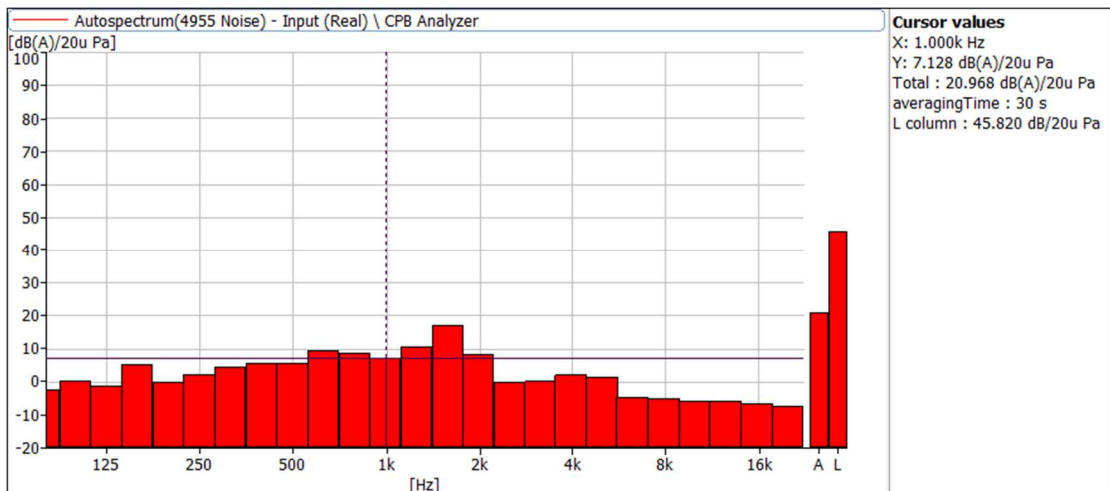





### Position 4

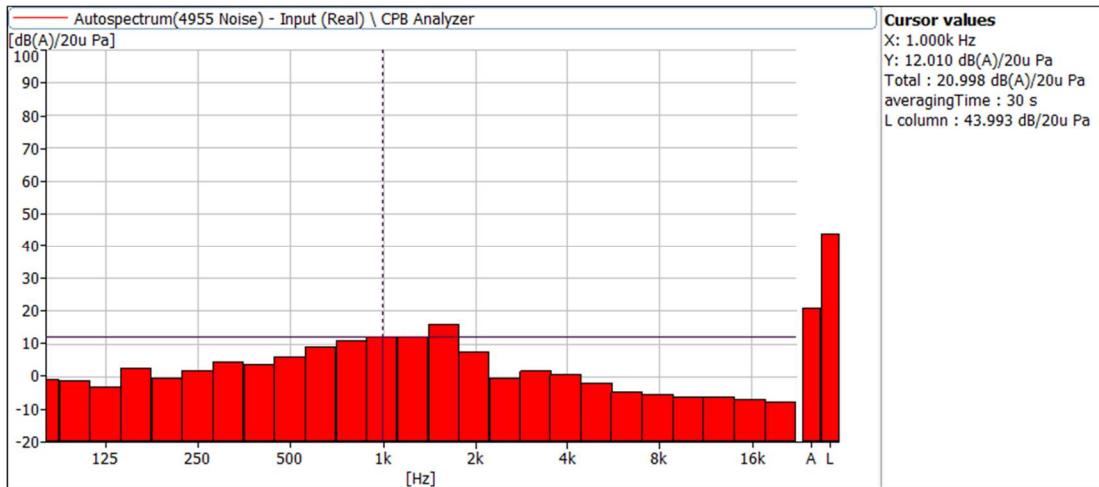


### Position 5

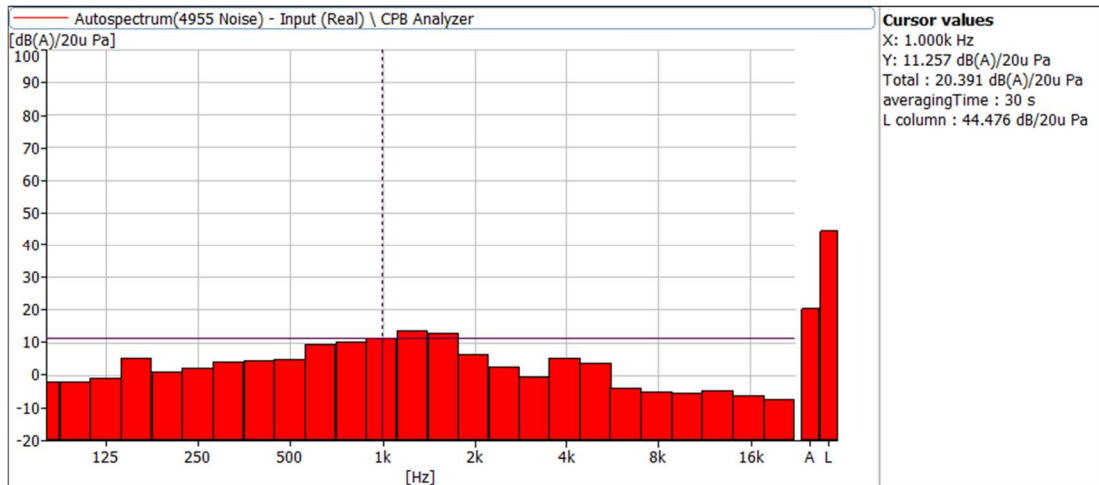


### Position 6

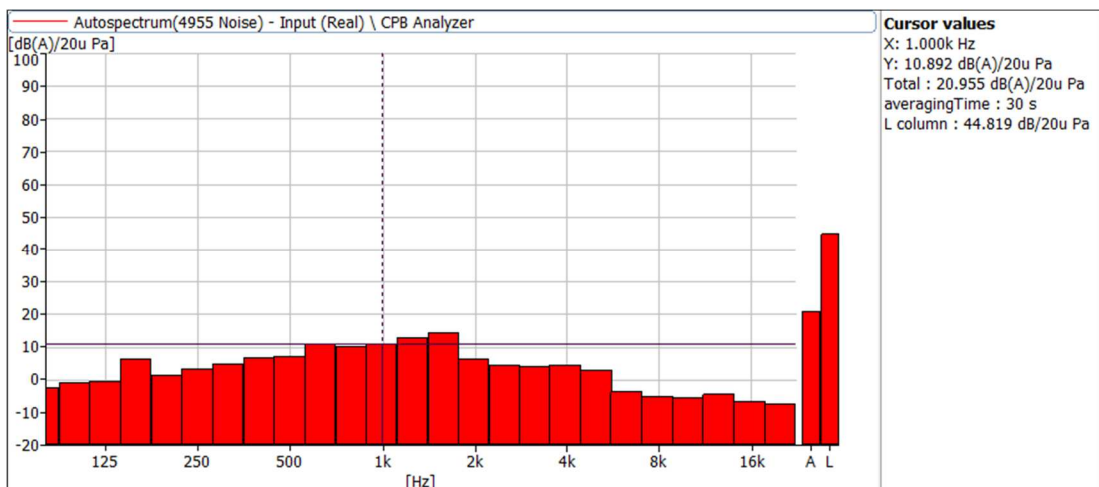


### Position 7

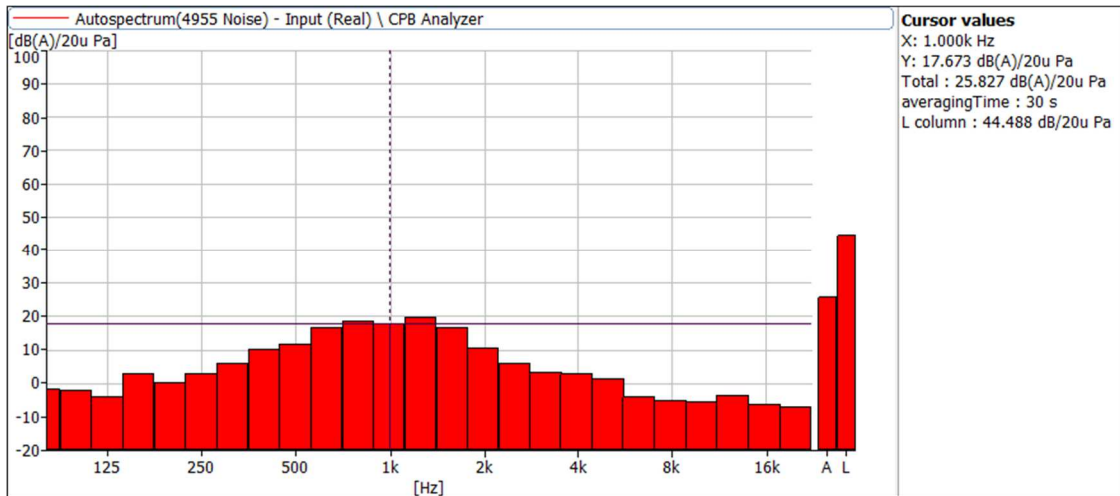

### Position 8

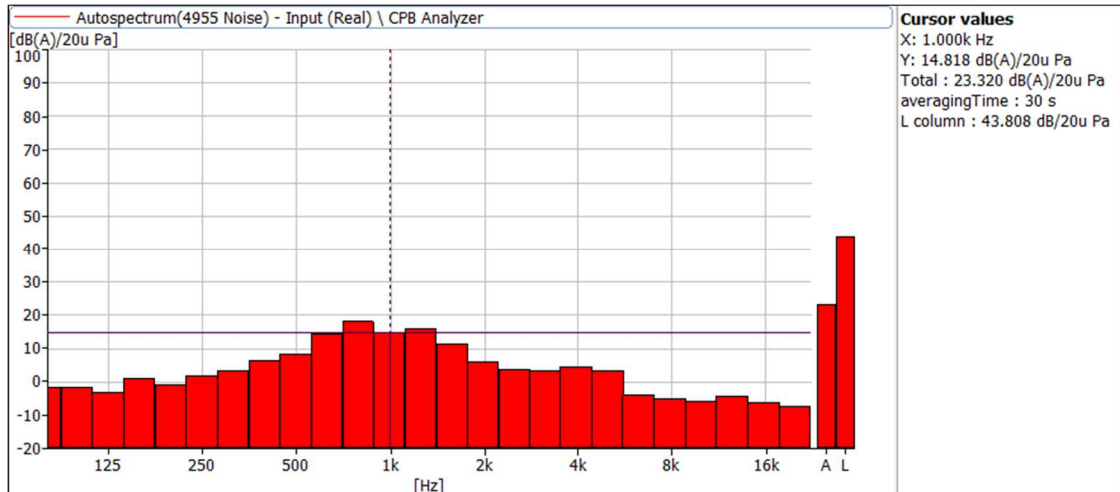

### Position 9

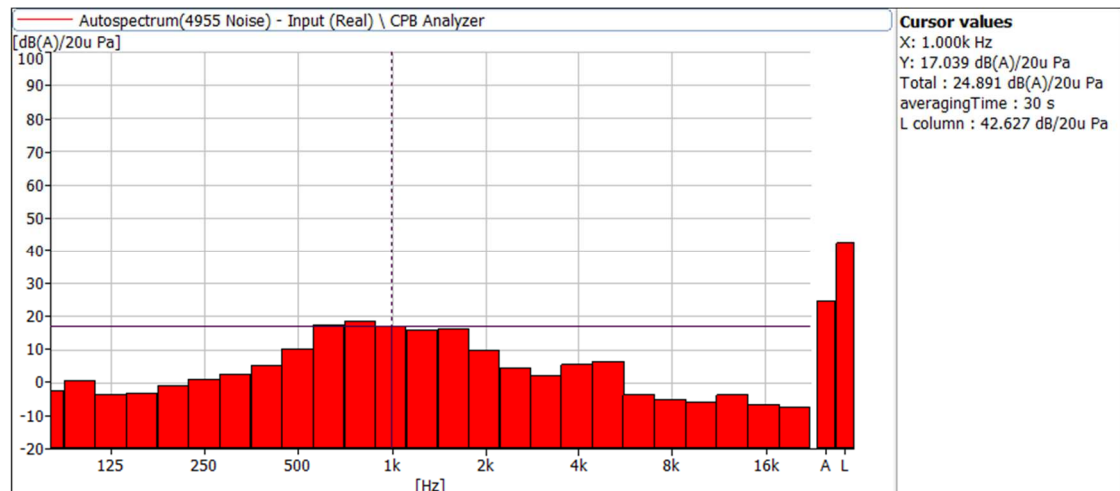

## Position 10

