



Type(s)

Project

Date

Notes

## GENERAL INFORMATION

The Unison Heritage Consolette Station is designed to provide mobility and flexibility, allowing local control from a podium, table, or other temporary position. Consolette stations interface to Unison Heritage Receptacle Stations, allowing you to move the device from one room to another, with different settings and functionality at each connection point.

### APPLICATIONS

- Houses of worship
- Hotels
- Convention centers
- Meeting rooms
- Schools
- Restaurants

### FEATURES

- LinkConnect – using Echelon's LonTalk® protocol with LinkPower, the two wire topology-free system gives you the freedom to put stations where you need them
- ColorCondition – RGB LED's allow for customized control indication on a per button basis, unlocking the conditional logic capabilities of a Paradigm control system
- Forever Legend System – complimentary colored standard or custom legend options using an indelible, laser-marking method
- LockOut – configurable control lockout from the push of a button
- Any Unison Heritage Station Faceplate (one gang or larger) can be mounted in a Portable Consolette enclosure

### REGULATORY AND COMPLIANCE

- cULus Listed
- CE Compliant

## ORDERING INFORMATION

### Consolette Stations

MODEL	DESCRIPTION
UH30407-_1P	4 fader, 7 button
UH30412-_1P	4 fader, 12 button
UH40707-_1P	7 fader, 7 button
UH40712-_1P	7 fader, 12 button
UH51007-_1P	10 fader, 7 button
UH51012-_1P	10 fader, 12 button
UH61307-_1P	13 fader, 7 button
UH61312-_1P	13 fader, 12 button
UH71607-_1P	16 fader, 7 button
UH71612-_1P	16 fader, 12 button

Enter station color code in \_ space provided:

1 = Cream (RAL 9001)

4 = Black (RAL 9004)

### Required Control System

MODEL	DESCRIPTION
P-ACP Mk2	Paradigm Architectural Control Processor Mk2

Note: A Paradigm Station Power Module (P-SPM-E Mk2) or Supply (P-SPS-D Mk2) is required.



SPECIFICATIONS

FUNCTIONAL

- Button functions include: preset selection, record mode activation, station lockout, raise, lower, macro activation, zone on/off control, event override and wall open/close or toggle
- Fader functions include master, zone, fade rate, or preset
- Custom button and fader functionality programmable via LightDesigner configuration software
- Programmable electronic lockout levels
- Allows for programming of individual lockout levels

MECHANICAL

- Standard configurations with 2, 5, 7 or 10 buttons, or 7 or 12 buttons and 4, 7, 10, 13 or 16 faders
- Custom configurations available, contact ETC
- Cantilevered switch arrays with removable caps
- Faceplates Constructed of injection molded, ABS plastic in two standard colors, matched to RAL standard colors
- Color matched extruded center section with injection molded ABS plastic endcaps
- 15 ft attached cable with rugged connector
- Custom colors available with sample
- Indelibly marked legends in a contrasting color
- Integral RGB LED response indicator for each button and fader

ELECTRICAL

- Connect to Unison receptacle stations using the LinkConnect control network over included ultra-flexible, 6 conductor cable

THERMAL

- Ambient room temperature: 0°C to 40°C (32°F to 104°F)
- Ambient humidity: 30%–90% non-condensing

PHYSICAL

Heritage Console Station Dimensions\*

GANG	HEIGHT		WIDTH (X)		DEPTH	
	in	mm	in	mm	in	mm
UH3XXXX-_1P	3.16	80	11.53	293	6.14	156
UH4XXXX-_1P	3.16	80	13.34	339	6.14	156
UH5XXXX-_1P	3.16	80	15.15	385	6.14	156
UH6XXXX-_1P	3.16	80	16.97	431	6.14	156
UH7XXXX-_1P	3.16	80	18.78	477	6.14	156


Heritage Console Station Weights\*

MODEL	WEIGHT		SHIPPING WEIGHT	
	lb	kg	lb	kg
UH3XXXX-_1P	3.4	1.5	4.9	2.2
UH4XXXX-_1P	3.9	1.8	5.4	2.5
UH5XXXX-_1P	4.4	2.0	5.9	2.7
UH6XXXX-_1P	4.9	2.2	6.4	2.9
UH7XXXX-_1P	5.4	2.5	6.9	3.1

\*Weights and dimensions typical

Note: UHPORT40712 shown. Side dimensions typical for all stations. Please reference dimensions chart for specific width.

TOP VIEW

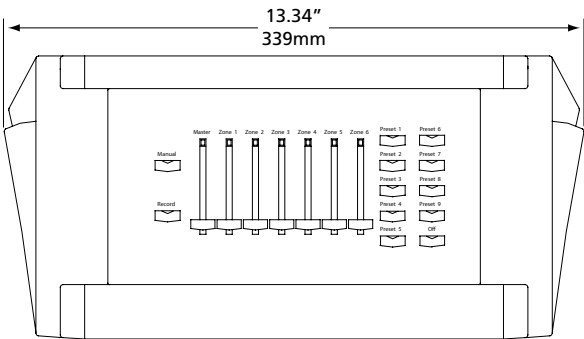

SIDE VIEW

