



cMe3

Empowering Your Space with Brilliance—
Where Innovation Meets Illumination

Features




- Articulating light cell
- Focusing handle
- Remote control dimming and tunable white
- Hardwire and plug-in power supply options
- Internal glare control filter
- External soft light diffusion
- cETL (conforms to UL 1598: CSA Std C22.2.250.0)

Construction



- Custom Heat Sink
- Powder coat black finish
- Diffusion plates from PMAA plastic
- Length: 35.4 inches (900 mm)
- Height and Depth: 10 inch x 4 inch (255 mm X 102 mm)
- Weight: 5.7 lbs. (2.6 kg)
- ADA compliant

LED Technology

- 120-277V 50/60 Hz input—42V DC output @0.9 A
- 3523 lumen output at 5000 degrees Kelvin
- 96+ CRI (98 TLCI)
- Color temperature range from 2700K to 6500K
- Adjustable for seasonal affective disorder (SAD) therapy
- RF remote- control with on/off and +/- brightness and color adjustment

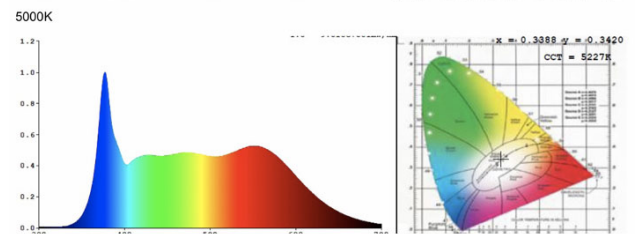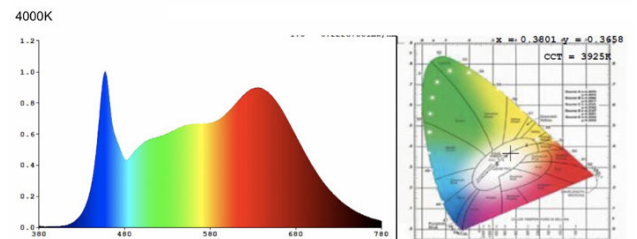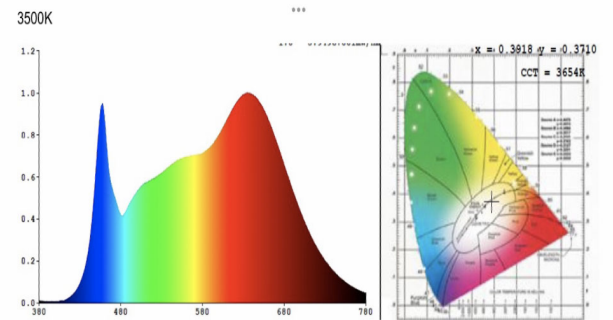

Graphical representations of 7-step quadrangle specification of SSL products

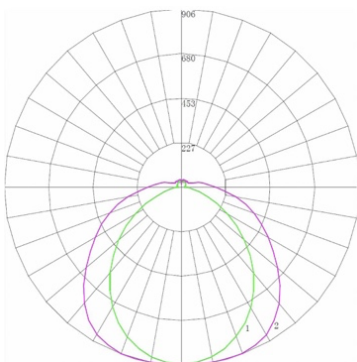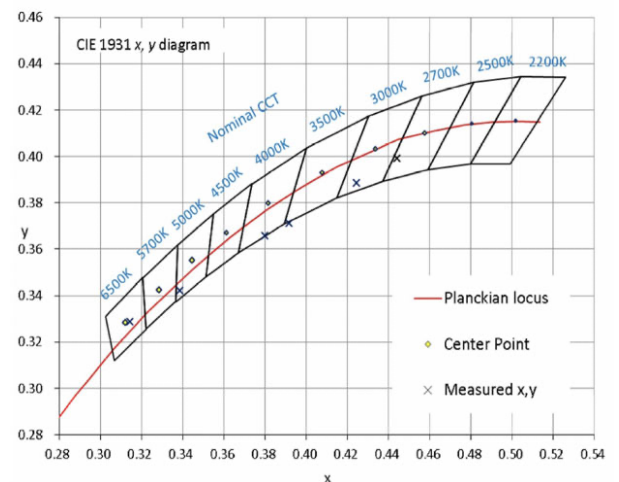

Professional lighting with dynamic control at your fingertips.

580 Mayer Street, Building #7, Bridgeville, PA 15017, USA

Brightlines.com | 1-412-206-0106

