
HOTSTIK G2 RGBALC

Next-Generation 6-in-1 LED Bar with Advanced Optics and Features

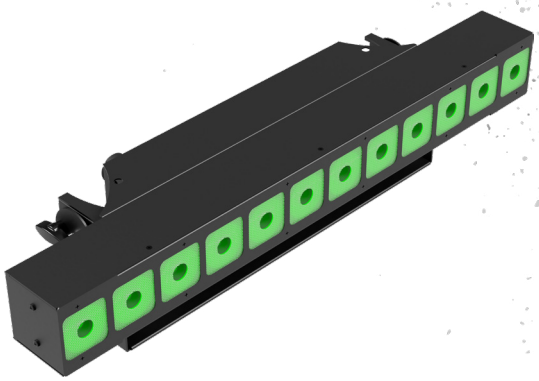

Powerful and Precise

The HotStik™ G2 RGBALC delivers professional wash effects via 12x 20W 6-in-1 RGBALC LEDs, which are all fitted in a compact, durable housing. Combining powerful output with precise optical design, its 25° lenses produce smooth, uniform color mixing and excellent beam consistency, ensuring dependable performance for any stage, event, installation, or architectural application.

Fully Loaded

This fixture offers a well-structured and easy-to-navigate OLED menu, 6/8/12-channel DMX profiles, built-in and customizable programs, a virtual color wheel, and 50 color presets including 32 Rosco® gel-matched selections. It also provides 5-pin DMX in/out, powerCON® TRUE1-compatible in/out, RDM support, 8 dimming curves, and adjustable refresh rates.

Luminous Intensity

Lux/M	2M	2.5M	3M	4M	5M
25°	10,828	6,440	4,545	2,667	1,618

Main Features

- RGBALC color mixing via 12x 20W 6-in-1 LEDs
- Built-in auto programs + virtual color wheel
- 18 standard + 32 Rosco® matched color presets
- 6/8/12-channel DMX profiles
- 8 user-selectable dimming modes
- User-selectable PWM refresh rates
- Flicker-free constant-current LED driver
- RDM (Remote Device Management)
- 25-degree beam angle
- 4-button control menu with OLED display
- Locking bracket for mounting or stable freestanding
- 5-pin male/female XLR input/output connections
- PowerCON® TRUE1-compatible power input

Optical

12x 20W RGBALC 6-in-1 LEDs, 100,000 hrs.

25° beam angle

Flicker-free LEDs

Weight & Dimensions

23.6” x 4.9” x 7.7” (600 x 124.2 x 196.5 mm)

11.3 lbs (5.14 kg)

Control

USITT DMX-512, RDM

5-pin DMX in/out

6/8/12-channel DMX modes

4-button menu with OLED display

M/S, auto, sound active

Power + Current

100-240VAC, 50-60 Hz

Consumption: 249W, 2.15A, PF: .99

PowerCON® TRUE1-compatible in/out

Warranty

2-year limited warranty