
infinipix™ BIG BLIND

Full Color + Cool/Warm White LED Blinder & Strobe

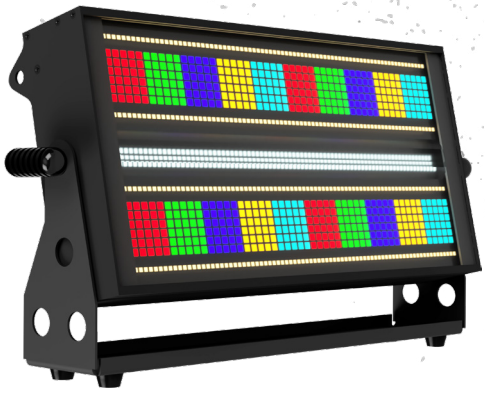

Multicolor Blinder Effects

The InfiniPix™ Big Blind is a high-output blinder and strobe fixture fitted with a variety of LED types including 600 x RGB 3-in-1 LEDs, 240 x CW (6200K) LEDs, and 320 x CW+WW (2900K/5600K) 2-in-1 LEDs for a wide range of visual effects. All LEDs are housed behind a full clear front lens, while the central cool white rows project through a secondary convex cylindrical lens for a tighter, more focused white beam.

Loaded with Features

This fixture offers 7/14/21/150-channel DMX modes for flexible control options. Each LED type offers dedicated DMX programs with a variety of fade, snap, and chase effects, plus adjustable speed and strobe. The fixture also includes 20 auto or sound-active programs via the OLED menu, along with a rugged metal housing, manually tiltable head, 5-pin DMX, and PowerCON® TRUE1-compatible in/out.

Warranty

And of course, the InfiniPix™ Big Blind is backed by Blizzard's 2-year limited warranty.

Main Features

- Colored strobe/blinder with manual tilt head
- 600 x RGB SMD LEDs, 20 pixel-mappable zones
- 240 x 1W CW SMD LEDs, 10 pixel zones
- 320 x 1W CW+WW SMD LEDs, 40 zones
- Beam angle: 68°, Field angle: 120°
- Independent CW, CW+WW, and RGB control
- Smooth 0–100% electronic dimming
- Multiple built-in speed programs for each LED type
- 150-channel pixel-mapping DMX mode
- RDM (Remote Device Management)
- 1–20Hz strobe effects
- Rugged metal housing with single-yoke design
- Clamp-mountable or freestanding use
- 5-pin DMX input/output
- PowerCON® TRUE1-compatible AC input/output

Optical

600x RGB 5050 SMD 3-in-1 LEDs

240x 1W CW (6200K) 5730 SMD LEDs

320x 1W CW+WW (2900K/5600K) 3030 SMD LEDs

Weight & Dimensions

18.6 x 4.3 x 10 in (472 x 110.1 x 254.2 mm)

15.2 lbs (6.9 kg)

Control

USITT DMX-512, RDM

5-pin DMX in/out

7/14/21/150-channel DMX modes

4-button OLED control panel menu

M/S, auto, sound active

Power + Current

100-240VAC, 50-60 Hz

Consumption: 385W, 3.41A, PF: .99

PowerCON® TRUE1-compatible in/out

Warranty + Certifications

2-year limited warranty