



Locate the three screws which attach the fixture's plastic front ring



Remove one of the screws using a T-15 Torx bit.



Find one of the mounting tabs included with the accessory you are mounting.



Attach the mounting tab to the front ring. Tighten the tab so that it is snug but still can be moved to align with the accessory's mounting holes.




Repeat mounting the remaining two tabs.



Slide the accessory over the front ring so that the slots and metal tabs each align.



Using the mounting screws provided with each tab, fasten the accessory to the mounting tabs. If necessary, adjust the tab position to align the screw holes.

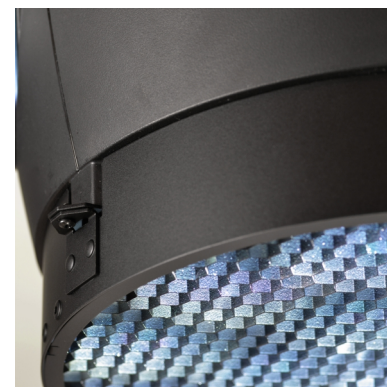

Complete the installation by attaching the accessory to the remaining two tabs.