

Ovation 2WL

FEATURES

- Effective utility light for use when DMX lighting isn't needed.
- Three selectable color temperatures (3200, 4000, 5600K) providing wide-spectrum, high-CRI lighting
- Soft, flood lighting minimizes shadows
- Use with direct line voltage and can be dimmed via off-the-shelf phase cut or triac dimmers

SPECIFICATIONS

OPTICAL

- Light Source: 960 LEDs (CW, WW)
- Color Temperature (3200k): 3217 K
- Color Temperature (4000k): 3960 K
- Color Temperature (5600k): 5584 K
- CRI (3200K): 95.3
- CRI (4000K): 95.2
- CRI (5600K): 94.0
- Beam Angle: 107.4°
- Field Angle: 158.7°
- Lumens (3200k): 10,564
- Lumens (4000k): 10,954
- Lumens (5600k): 11,328
- Illuminance 3200k: 158 lux @ 5 m
- Illuminance (4000k): 164 lux @ 5 m
- Illuminance (5600k): 169 lux @ 5 m

DYNAMIC EFFECTS

- Dimmer: External Dimmer (phase cut or triac compatible)
- On-board Color Temperature Selection


CONSTRUCTION / PHYSICAL

- Dimensions: 17.51x 11.06 x 5.47 in (445 x 281 x 139 mm)
- Weight: 10.2 lb (4.6 kg)
- Exterior Color: Black
- Housing Material: Aluminum alloy
- Accessory Holder/Gel Frame Size: 14.375 x 8.50 x 0.125 in (365.125 x 216 x 3.175 mm)

CONNECTIONS

- Power Connection: Edison (local) plug to Seetronic Powerkon IP65
- Power Input: Seetronic Powerkon IP65
- Power Output: Seetronic Powerkon IP65
- Cable Length (power): 5 ft (1.5 m)

ELECTRICAL

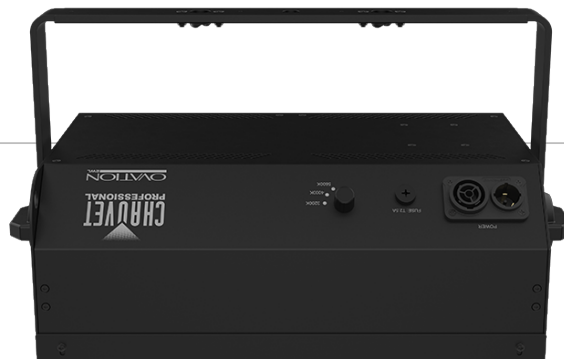

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power Linking: 13 units @ 120 V; 21 units @ 208 V; 23 units @ 230 V
- Power and Current: 103 W, 0.91 A @ 120 V, 60 Hz
- Power and Current: 99 W, 0.55 A @ 208 V, 60 Hz
- Power and Current: 98 W, 0.51 A @ 230 V, 50 Hz
- Breaker Size: T2.5 A, 350 V

CERTIFICATIONS / QUALIFICATIONS

- CE, MET, FCC, RoHs
- IP Rating: IP20, dry location
- Temperature (Ambient): -4 °F to 113 °F (-20 °C to 45 °C)

WHAT'S INCLUDED

- Ovation 2WL
- Seetronic Powerkon power cable
- Omega Bracket with mounting hardware

OPTIONAL ACCESSORIES

- Professional Clamps: CTC-50HC, CTC-50HCN