

MEGA^{LITE}

HAZE²ENGINE™



Product Description:

The Haze 2 Engine offers versatile functionality with its adjustable output direction feature, allowing you to create various haze effects tailored to different events. With multiple means of control including a convenient 2 button remote which gives you complete flexibility in how you control your unit. These features along with the unit's quiet mode make the Haze 2 Engine an extremely versatile unit.

Adjustable Direction

The Haze 2 Engine has two adjustable gates that can be used to change the direction the haze flows out of the unit creating different effects for different events.

Wireless Control

The Haze 2 Engine can also be controlled via 2 button remote control giving you more flexibility in how you control this unit.

Quiet Mode

The unit is equipped with a quiet mode engineered for theatrical and intimate venues, ensuring an immersive experience for both performers and audiences alike.

Mechanical Specifications

| | |
|----------------------|--|
| Housing: | Sheet Metal |
| Mounting System: | Rubber feet for Floor Mounting |
| Power Connection: | Panel: Seetronics SAC3MPX Panel Mount Cable: Seetronics SAC3FX to Nema 5/15 |
| Signal Connection: | 3 and 5 Pin XLR In and Out |
| Output Direction: | Forward and Upwards gates |
| Tank Size: | 42oz |
| Wireless Controller: | Wireless handheld on/off controller |
| Manual Engage: | Yes |


Electrical Specifications

| | |
|--------------------|--------------------------------|
| Power Input: | 110V 60hz |
| Fuse: | F10 250V |
| Heat Source Watts: | 900W |
| Power Consumption: | 927 Watts 8 Amps @110V |
| Fan Speed: | Controlled Via Display and DMX |
| Haze Output: | Controlled Via Display and DMX |
| Haze Volume: | 9,000 CuFT/Min |
| Heat Up Time: | 1 min 40 sec from cold start |

Control System

| | |
|-----------------|---|
| Operating Mode: | DMX, Manual Settings Via Display, Wireless Remote on/off controller, Manual Engage Button |
| Protocol: | DMX 512 |
| Channel Modes: | 2 Channel Mode Volume, Fan Speed |
| DMX-512: | Yes |

Size and Weight

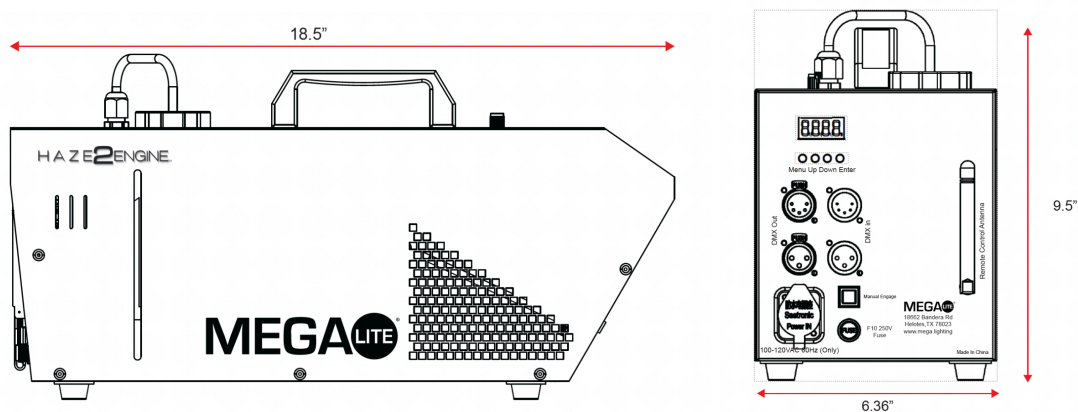

Fixture Size:
Fixture Weight:
Packaged Size:
Packaged Weight:

18.5" X 6.36" X 9.5"
12lb
21.5" X 9" X 10.75"
14lb

Included Items

2002: Haze 2 Engine
2002-REM: Haze 2 Engine Remote

Accessories:

Part Number: Haze 2 Engine Road Case

Customer Service

MEGA-Lite has a customer support line to provide set-up help and answer any questions should you encounter a problem. Please visit our website for any other related technical documents. For service-related issues, please contact our service department at service@mega.lighting

Operating Hours: Monday - Friday 9AM - 6PM CST
Phone: (210) 684-2600
Email: Sales@mega.lighting

MEGA LITE[®]

18662 Bandera Rd
Helotes, TX 78023
Phone (210)684-2600 / Fax (210)855-6279
www.mega.lighting / info@mega.lighting