

AXCOR PROFILE 600

EN PHOTOMETRIC DIAGRAMMS

ES DIAGRAMAS FOTOMÉTRICOS


IT DIAGRAMMI FOTOMETRICI

FR DIAGRAMMES PHOTOMETRIQUES

DE FOTOMETRISCHE DIAGRAMME


Minimum Zoom, Standard mode (5.3°)

Total Output: 6400 lumens

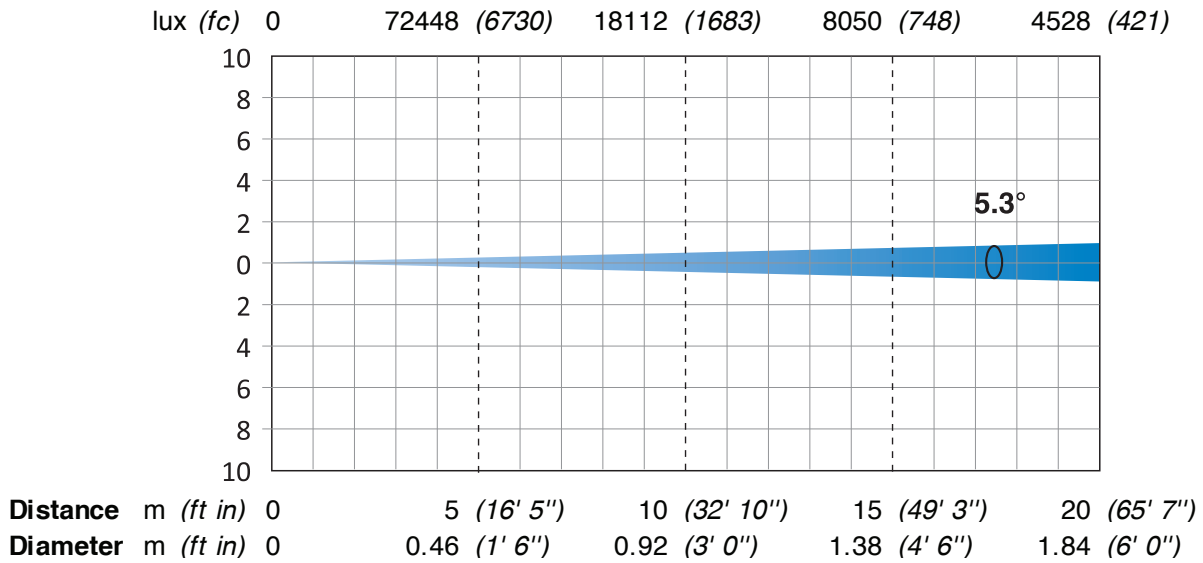

Minimum Zoom, Boost mode (5.3°)

Total Output: 7300 lumens

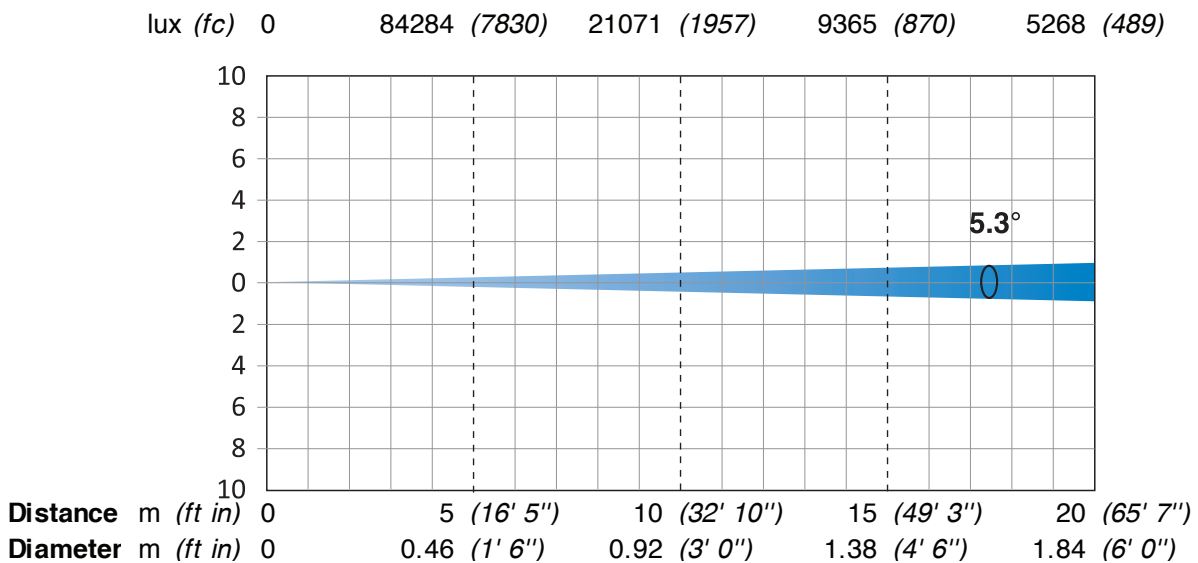

AXCOR PROFILE 600

EN PHOTOMETRIC DIAGRAMMS

ES DIAGRAMAS FOTOMÉTRICOS


IT DIAGRAMMI FOTOMETRICI

FR DIAGRAMMES PHOTOMETRIQUES

DE FOTOMETRISCHE DIAGRAMME

Maximum Zoom, Standard mode (47.2°)


Total Output: 15800 lumens

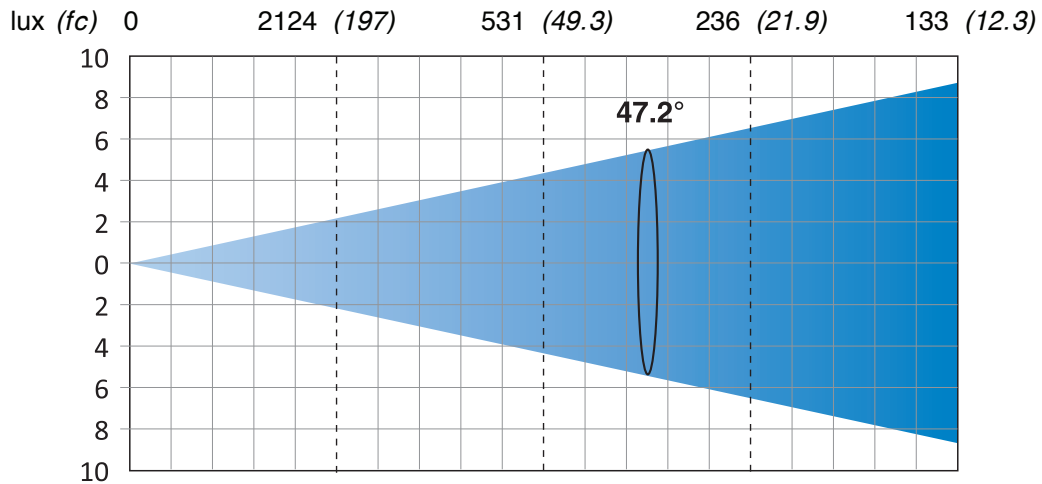

Distance m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter m (ft in)	0	4.37 (14' 4'')	8.73 (28' 8'')	13.10 (43' 0'')	17.47 (57' 4'')

Maximum Zoom, Boost mode (47.2°)

Total Output: 18100 lumens

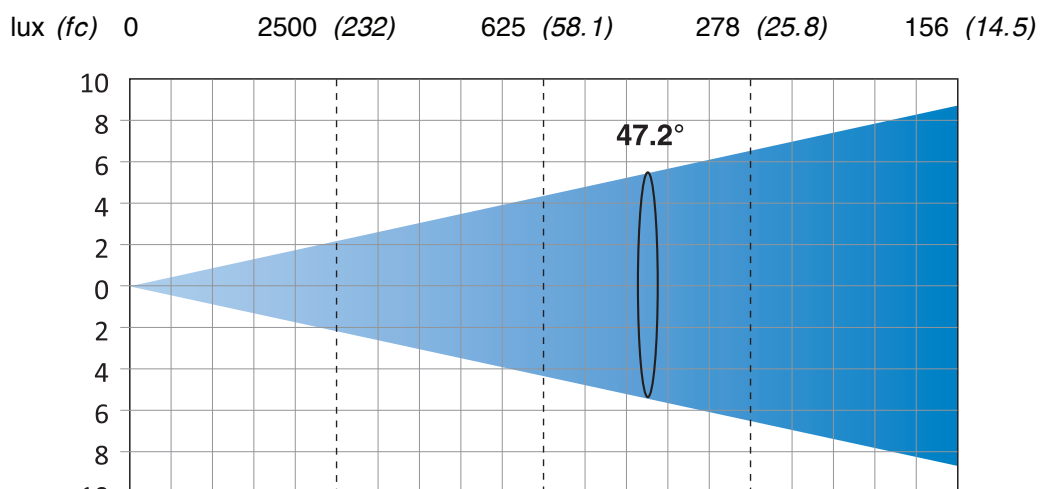

Distance m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter m (ft in)	0	4.37 (14' 4'')	8.73 (28' 8'')	13.10 (43' 0'')	17.47 (57' 4'')