


HEADSET MICROPHONE USER'S MANUAL



HSM4F

FULLY ADJUSTABLE - LIGHTWEIGHT
OMNI-DIRECTIONAL HEADSET MICROPHONE

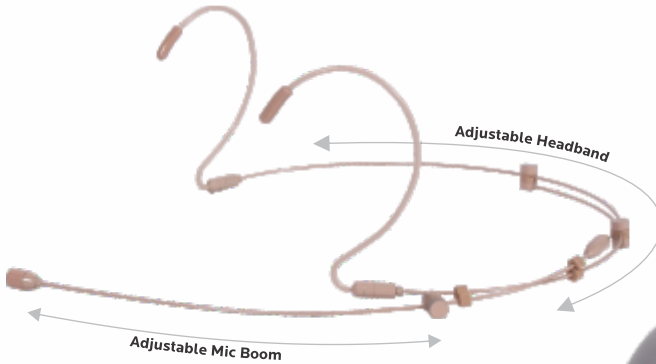

DESIGNED TO STORE FLAT



HSM4F



Thank you for your purchase of a Galaxy Audio headset microphone. This Super Lightweight Headset Microphone is highly sensitive, with a wide frequency response for crisp, clear sound. It's aesthetically pleasing, hands-free design is ideal for vocalists, coaches, teachers or anyone who uses a microphone while speaking or performing.

The microphone works great with many wireless transmitters available. Detachable cables are available to use your headset mic with transmitters made by Galaxy Audio®, AKG®, Shure®, Audio Technica®, Sennheiser®, etc.. When attaching the cable to the headset do not over-tighten the threaded connector.


The bendable microphone stem allows for easy adjustment of the microphone's position as you wear the headset.

The super lightweight and adjustable design makes wearing the microphone more comfortable, even for long periods of time, without using excessive pressure to hold the microphone in place.

HSM4F SPECIFICATIONS:

- Fully Adjustable
- Headband Adjusts from 8.5" to 15"
- Adjustable Mic Boom Length 1.5" to 7.9"
- Flexible & Collapsible Dual Ear Hooks
- Polar Pattern: Omni-directional.
- Frequency Response: 85Hz-15kHz
- Impedance: $2200\Omega \pm 30\%$ (at 1 K Hz)
- Sensitivity: -40dB re.1V/Pa
- Max SPL: 110dB
- Operating Voltage: 2.0 - 10Vdc
- Cable Length: 4' (1.22 m) x 1.5 Diameter, 1.5 mm Thick Detachable Cable
- Element Type: Back Electret Condenser
- Element Diameter: 5mm
- Weight: 8.2g

HSM4F OMNI FREQUENCY RESPONSE CURVE:

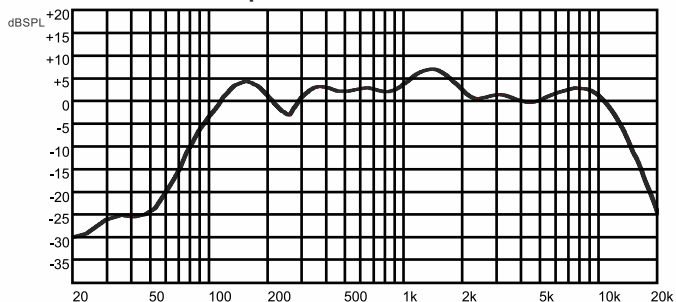

HOW TO ADJUST FOR THE MICROPHONE STEM

Adjust the boom length by sliding the boom forward or back. Once you have the desired mic position you may **Gently** bend the boom to get the best position off of the face and away from facial hair. Normally, the best position is just off to the side of the mouth




CAUTION:

The microphone stem could be damaged if it is bent too sharply. Physical damage is not covered under warranty.

HOW TO WEAR AND TAKE OFF THE HSM4F MICROPHONE

Holding both Ear Hooks slightly bend them (a) outwards with both hands and put them on or lift them up to remove.

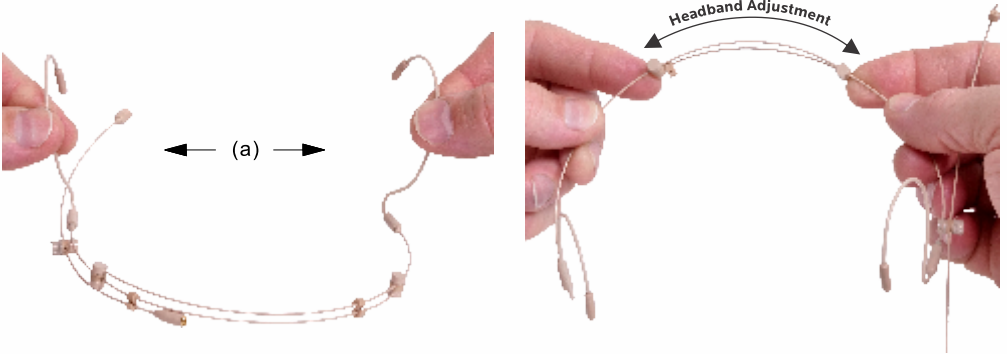

HOW TO ADJUST FOR THE PROPER HEAD SIZE

Adjust the headband by pushing the two rear adjustment cylinders in or out while holding the outside edges of the headband.

DESIGNED TO STORE FLAT

Ear hooks only have 90 Degrees or rotation to fold inward.





SUPERIOR SOUND FOR YOU



www.galaxyaudio.com

ONE YEAR LIMITED WARRANTY

WARRANTY Information can be viewed online at
<https://www.galaxyaudio.com/support/warranty>



www.galaxyaudio.com/support/warranty

HSM4F

1-800-369-7768 www.galaxyaudio.com

Specifications in this manual are subject to change without notice.

© Copyright Galaxy Audio 2023