


# VISION.NET WALL STATIONS

Date: \_\_\_\_\_  
Type: \_\_\_\_\_  
Firm: \_\_\_\_\_  
Name: \_\_\_\_\_  
Project: \_\_\_\_\_

Vison.Net stations are designed to control architectural lighting by distributing both power and intelligence. The system provides processing power and control at each respective station, eliminating the need for a central processor. VISION.NET provide individual control of up to 16 sliders or up to 35 buttons per station. Combinations of sliders and buttons can be configured as well.

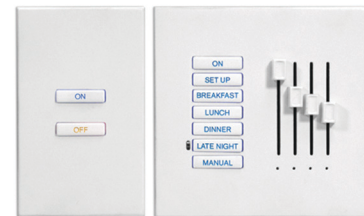

- All station buttons and faders are fully programmable
- All stations include integrated processors and may operate as stand-alone systems
- Station set up and configuration is simple
- Configuration software can upload and download station set-up data
- Commands include (but are not limited to): Raise/lower, Preset, Toggle on/off, Smart commands allow multiple system commands to be executed from a single button press
- All keypads feature programmable backlighting
- Custom-configurable button and slider stations



VARI\*LITE

# Specifications

Due to continuous improvements and innovations, specifications may change without notice.

## Electrical

---

Supply Voltage	18-26VDC
Input Current	20mA

---

## Data

---

Vision.Net Sensor & Contact Closure connector  
1 x 6-position plug-in PCB Header  
\*Vision.Net Sensor - pins 1-4, Contact Closure - pins 5-6

---

Vision.Net (RS485) connector 1x 9-position plug-in PCB Header  
\*Recommended cable type: Belden 1583a, CAT5e, 24 AWG, Solid

---

## Certification and Safety


---

Conformity	Conforms to EN60950, EMC: EN55032, CISPR 32
------------	---


---

# Dimensions


63321,63322,63324,63325,63328




63303




63306



63309



63312,63315

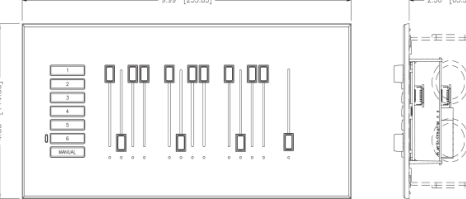

## Physical

Construction	Injection molded engineering plastic
Appearance	Screwless faceplate, backlit engraveable keycaps
Operating Temperature	0 - 40°C (32 - 104°F)
Storage Temperature	25 - 85 °C (77 - 185 °F)
Humidity	30-90% non-condensing

# Product and Accessories

<b>Product Name</b>	<b>Order Code</b>
VISION.NET WALL STATIONS	
Vision.Net Wall Station - 1 button (White, 1 gang)	63321
Vision.Net Wall Station - 2 button (White, 1 gang)	63322
Vision.Net Wall Station - 4 button & I/R (White, 1 gang)	63324
Vision.Net Wall Station - 5 button (White, 1 gang)	63325
Vision.Net Wall Station - 7 button & I/R (White, 1 gang)	63328
Vision.Net Wall Station - 7 buttons & 4 faders (White, 2 gang)	63303
Vision.Net Wall Station - 7 buttons & 7 faders (White, 3 gang)	63306
Vision.Net Wall Station - 7 buttons & 10 faders (White, 4 gang)	63309
Vision.Net Wall Station - 7 buttons & 13 faders (White, 5 gang)	63312
Vision.Net Wall Station - 7 buttons & 16 faders (White, 5 gang)	63315

<b>Accessories</b>	<b>Order Code</b>
Locking cover - 1 gang (bronze tinted plexiglass)	66701
Locking cover - 2 gang (bronze tinted plexiglass)	66702
Locking cover - 3 gang (bronze tinted plexiglass)	66703
Locking cover - 4 gang (bronze tinted plexiglass)	66704
Locking cover - 5 gang (bronze tinted plexiglass)	66705
Surface mount backbox - 1 gang	2-069024-010
Surface mount backbox - 2 gang	2-069025-010
Surface mount backbox - 3 gang	2-069026-010
Surface mount backbox - 4 gang	2-069028-010
Surface mount backbox - 5 gang	2-069030-010
Recessed backbox - 1 gang	66801
Recessed backbox - 2 gang	66802
Recessed backbox - 3 gang	66803
Recessed backbox - 4 gang	66804
Recessed backbox - 5 gang	66805

