




QolorFLEX HiQ High CRI LED Tape, 2700-6500K was designed to have a Color Rendering Index (CRI) of 95+, making it an ideal high CRI LED tape for the needs of the film industry. QolorFLEX HiQ High CRI LED Tape offers exceptional on-camera color rendition and allows lighting professionals to match the light sources already being used on their set. It is available in three color temperatures: 3200K, 6000K, and 2700-6500K. Like all 40+ types of QolorFLEX LED Tape, QolorFLEX HiQ High CRI LED Tape is sold in 5m reels and includes sixinch long pigtails on both ends for easy connections to QolorFLEX Dimmers for flicker-free dimming.

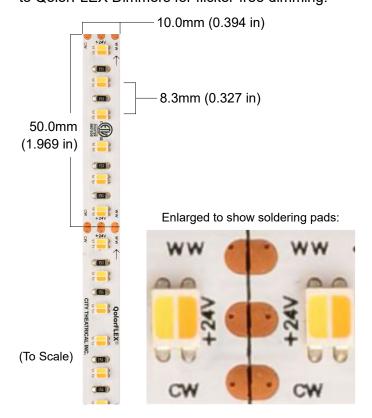

QolorFLEX® HiQ High CRI LED Tape, 2700-6500K 3527-24-H27006500-120-5-20-1

SPECIFICATIONS:

Physical			
Length	5m	(16.404 ft)	
Width	10mm	(0.394 in)	
Cutting Increment	50mm	(1.969 in)	
LED Spacing	8.3mm	(0.327 in)	
Backing Color	White		
Connector Type	flat cable o	200mm long (7.874 in) flat cable on both ends, stripped 10mm and tinned	

Output	
Color(s)	WW+CW
Color Temperature	2700K±150K, 6500K±500K
Beam Angle	120°
Brightness	1200 lumens/m
Color Rendering Index (CRI)	≥ 95

Electrical		
Operating Voltage	24VDC	
Current	3200 mA/5m	
Power Consumption	77 w/5m (4.69 w/ft)	
Density	120 LEDs/m	
LED Chip Size	3527	

Product Information		
Use Environment	Indoor	
Dimmable	Fully Dimmable	
Average Life	50,000 hours	
Warranty	Two years	
IP Rating	IP20	
Compliance	ETL, CE, RoHS Intertek	

