

TZ-606WWP AS

COLUMN SPEAKER



The TZ Series Column Speakers are highly efficient compact speakers that deliver excellent sound performance in medium sized venues such as houses of worship, gymnasiums, auditoriums and more.


Key features

- Column Speaker is suitably designed for in-door use and/or outdoor use.
- Efficient for use in a spacious room.
- The speaker unit is designed to reproduce sound with good clarity and high input power capacity.
- The plastic column speaker comes with speaker bracket as accessories.
- The speaker bracket offers better installation flexibility.

Specifications

Enclosure	Sealed Type
Rated Input	60 W
Rated Impedance	100 V line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 1.3 k Ω (7.5 W) 70 V line: 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W), 1.3 k Ω (3.8 W)
Sensitivity	94 dB (1 W, 1 m)
Frequency Response	150 Hz - 13,000 Hz
Speaker Component	10 cm (4") PP cone type x 6
Input Terminal	Push-In terminal
Finish	Enclosure: HIPS, white Punched Net: Surface-tread steel plate, white, paint Speaker Bracket: Aluminum die-cast, white, paint Joint Bracket, Wall Bracket: Steel plate, t:1.6mm, white, paint (ED coating)
Dimensions	135 (W) x 746 (H) x 128 (D) mm (5.31" x 29.37" x 5.04")
Weight	5.5 kg (12.12 lbs.) unit only
Included Accessories	Speaker Bracket x 1, Joint Bracket x 1, Wall Bracket x 1, Fixing Bolt (M5 x 60) x 1, Hexagon Bolt (M6 x 12) (with plain washer and spring washer) x 2, Machine Screw (M5 x 20) (with plain washer and spring washer) x 2, Hexagon Bolt (M8x 15) x 1, Tapping screw(4x12) x 4, Terminal Cover x 1
Optional Accessories	Speaker Stand: ST-16A

Dimensions

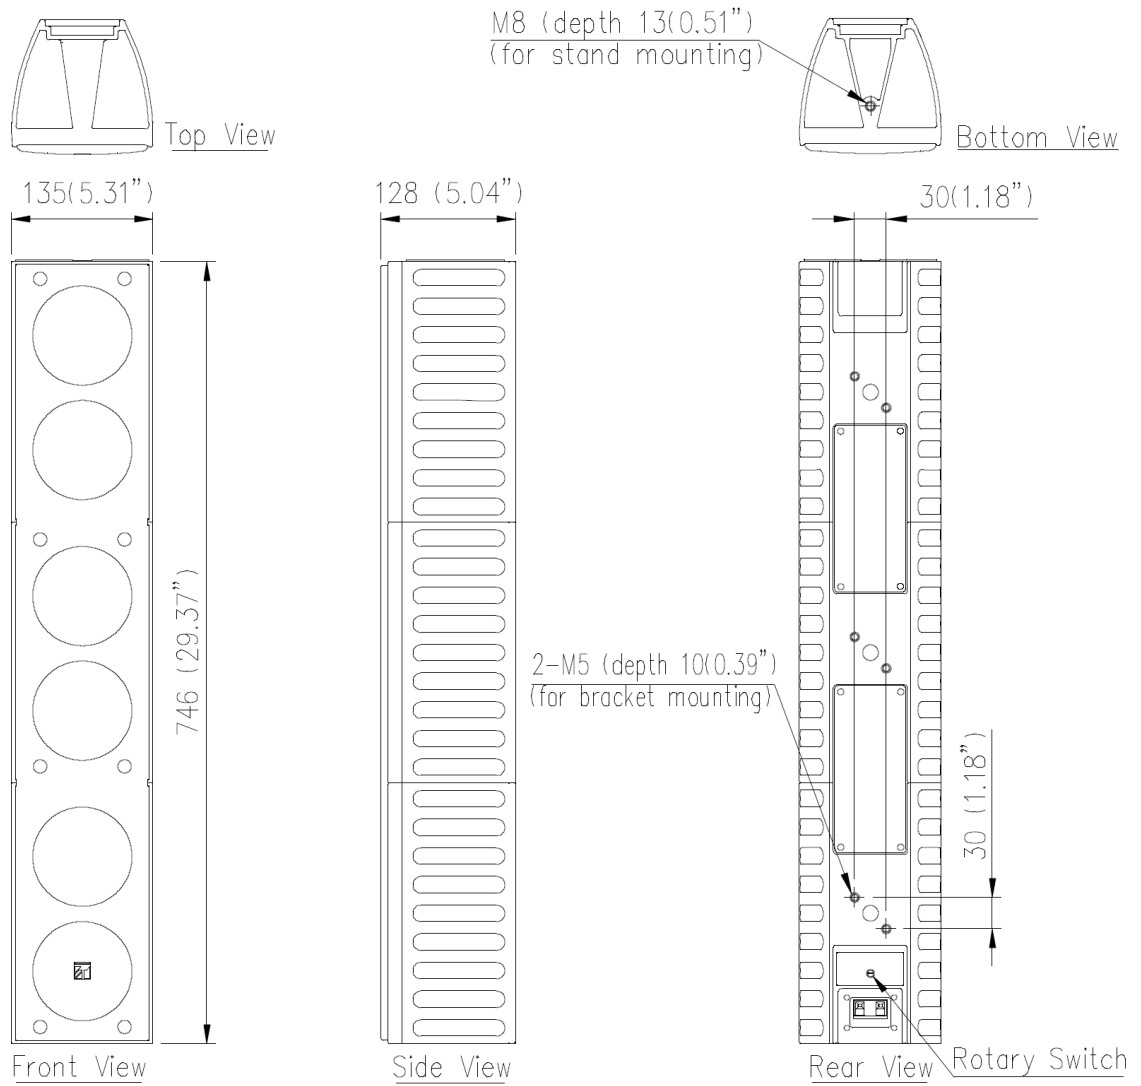

UNIT: mm